

---

# **kayobe Documentation**

***Release 18.1.0.dev23***

**OpenStack Foundation**

**Jun 12, 2025**



# CONTENTS

<b>1</b>	<b>Overview</b>	<b>1</b>
<b>2</b>	<b>Kayobe</b>	<b>3</b>
2.1	Features . . . . .	3
2.2	Documentation . . . . .	4
2.3	Release Notes . . . . .	4
2.4	Bugs . . . . .	4
2.5	Community . . . . .	4
2.6	License . . . . .	4
<b>3</b>	<b>Contents</b>	<b>5</b>
3.1	Getting Started . . . . .	5
3.2	Architecture . . . . .	5
3.3	Support Matrix . . . . .	7
3.4	Installation . . . . .	7
3.5	Usage . . . . .	10
3.6	Configuration Guide . . . . .	12
3.7	Deployment . . . . .	142
3.8	Upgrading . . . . .	154
3.9	Administration . . . . .	161
3.10	Resources . . . . .	175
3.11	Advanced Documentation . . . . .	176
3.12	Contributor Guide . . . . .	194



## OVERVIEW

Welcome to the Kayobe documentation, the official source of information for understanding and using Kayobe.

This documentation is maintained at [opendev.org](https://opendev.org) [here](#). Feedback and contributions welcome, see [contributing](#) for information on how.



## KAYOBE

Kayobe enables deployment of containerised OpenStack to bare metal.

Containers offer a compelling solution for isolating OpenStack services, but running the control plane on an orchestrator such as Kubernetes or Docker Swarm adds significant complexity and operational overheads.

The hosts in an OpenStack control plane must somehow be provisioned, but deploying a secondary OpenStack cloud to do this seems like overkill.

Kayobe stands on the shoulders of giants:

- OpenStack bifrost discovers and provisions the cloud
- OpenStack kolla builds container images for OpenStack services
- OpenStack kolla-ansible delivers painless deployment and upgrade of containerised OpenStack services

To this solid base, kayobe adds:

- Configuration of cloud host OS & flexible networking
- Management of physical network devices
- A friendly openstack-like CLI

All this and more, automated from top to bottom using Ansible.

### 2.1 Features

- Heavily automated using Ansible
- *kayobe* Command Line Interface (CLI) for cloud operators
- Deployment of a *seed* VM used to manage the OpenStack control plane
- Configuration of physical network infrastructure
- Discovery, introspection and provisioning of control plane hardware using OpenStack bifrost
- Deployment of an OpenStack control plane using OpenStack kolla-ansible
- Discovery, introspection and provisioning of bare metal compute hosts using OpenStack ironic and ironic inspector
- Virtualised compute using OpenStack nova
- Containerised workloads on bare metal using OpenStack magnum

- Control plane monitoring using [Prometheus](#) and [Grafana](#).
- Log aggregation using [OpenSearch](#) and [OpenSearch Dashboards](#).

## **2.2 Documentation**

<https://docs.openstack.org/kayobe/latest/>

## **2.3 Release Notes**

<https://docs.openstack.org/releasenotes/kayobe/>

## **2.4 Bugs**

<https://bugs.launchpad.net/kayobe>

## **2.5 Community**

OFTCs IRC channel: [#openstack-kolla](#)

## **2.6 License**

Kayobe is distributed under the [Apache 2.0 License](#).

## CONTENTS

### 3.1 Getting Started

We advise new users start by reading the *Architecture* documentation first in order to understand Kayobes various components.

For users wishing to learn interactively we recommend starting at either the *all-in-one overcloud* deployment or the *A Universe From Nothing* deployment guide.

Once familiar with Kayobes constituent parts, move on to the *Installation* section to prepare a baremetal environment and then *Deployment* to deploy to it.

- *Architecture* - The function of Kayobes host and networking components
- *Installation* - The prerequisites and options for installing Kayobe
- *Usage* - An introduction to the Kayobe CLI
- *Configuration* - How to configure Kayobes various components
- *Deployment* - Using Kayobe to deploy OpenStack
- *Upgrading* - Upgrading from one OpenStack release to another
- *Administration* - Post-deploy administration tasks
- *Resources* - External links to Kayobe resources
- *Contributor* - Contributing to Kayobe and deploying Kayobe development environments

### 3.2 Architecture

#### 3.2.1 Hosts in the System

In a system deployed by Kayobe we define a number of classes of hosts.

##### **Ansible control host**

The Ansible control host is the host on which kayobe, kolla and kolla-ansible will be installed, and is typically where the cloud will be managed from.

##### **Seed host**

The seed host runs the bifrost deploy container and is used to provision the cloud hosts. By default, container images are built on the seed. Typically the seed host is deployed as a VM but this is not mandatory.

### Infrastructure VM hosts

Infrastructure VMs (or Infra VMs) are virtual machines that may be deployed to provide supplementary infrastructure services. They may be for things like proxies or DNS servers that are dependencies of the Cloud hosts.

### Cloud hosts

The cloud hosts run the OpenStack control plane, network, monitoring, storage, and virtualised compute services. Typically the cloud hosts run on bare metal but this is not mandatory.

### Bare metal compute hosts

In a cloud providing bare metal compute services to tenants via ironic, these hosts will run the bare metal tenant workloads. In a cloud with only virtualised compute this category of hosts does not exist.

#### Note

In many cases the control and seed host will be the same, although this is not mandatory.

## Cloud Hosts

Cloud hosts can further be divided into subclasses.

### Controllers

Controller hosts run the OpenStack control plane services.

### Network

Network hosts run the neutron networking services and load balancers for the OpenStack API services.

### Monitoring

Monitoring host run the control plane and workload monitoring services. Currently, kayobe does not deploy any services onto monitoring hosts.

### Virtualised compute hypervisors

Virtualised compute hypervisors run the tenant Virtual Machines (VMs) and associated OpenStack services for compute, networking and storage.

## 3.2.2 Networks

Kayobes network configuration is very flexible but does define a few default classes of networks. These are logical networks and may map to one or more physical networks in the system.

### Overcloud out-of-band network

Name of the network used by the seed to access the out-of-band management controllers of the bare metal overcloud hosts.

### Overcloud provisioning network

The overcloud provisioning network is used by the seed host to provision the cloud hosts.

### Workload out-of-band network

Name of the network used by the overcloud hosts to access the out-of-band management controllers of the bare metal workload hosts.

### Workload provisioning network

The workload provisioning network is used by the cloud hosts to provision the bare metal compute hosts.

**Internal network**

The internal network hosts the internal and admin OpenStack API endpoints.

**Public network**

The public network hosts the public OpenStack API endpoints.

**External network**

The external network provides external network access for the hosts in the system.

## 3.3 Support Matrix

### 3.3.1 Supported Operating Systems

Kayobe supports the following host Operating Systems (OS):

- Rocky Linux 9 (since Zed 13.0.0 release)
- Ubuntu Noble 24.04 (since Dalmatian 17.0.0 release)

In addition to that CentOS Stream 9 host OS is functional, but not officially supported. Kolla does not publish CentOS Stream 9 images to Docker Hub/Quay.io, therefore users need to build them by themselves.

**Note**

CentOS Stream 8 is no longer supported as a host OS. The Yoga release supports both CentOS Stream 8 and 9, and provides a route for migration.

**Note**

Rocky Linux 8 is no longer supported as a host OS. The Yoga release supports both Rocky Linux 8 and 9, and provides a route for migration.

### 3.3.2 Supported container images

For details of container image distributions supported by Kolla Ansible, see the [support matrix](#).

For details of which images are supported on which distributions, see the [Kolla support matrix](#).

## 3.4 Installation

Kayobe can be installed via the released Python packages on PyPI, or from source. Installing from PyPI ensures the use of well used and tested software, whereas installing from source allows for the use of unreleased or patched code. Installing from a Python package is supported from Kayobe 5.0.0 onwards.

### 3.4.1 Prerequisites

Currently Kayobe supports the following Operating Systems on the Ansible control host:

- CentOS Stream 9 (since Zed 13.0.0 release)
- Rocky Linux 9 (since Zed 13.0.0 release)
- Ubuntu Noble 24.04 (since Dalmatian 17.0.0 release)

See the [support matrix](#) for details of supported Operating Systems for other hosts.

To avoid conflicts with python packages installed by the system package manager it is recommended to install Kayobe in a virtualenv. Ensure that the `virtualenv` python module is available on the Ansible control host. It is necessary to install the GCC compiler chain in order to build the extensions of some of kayobes python dependencies.

On CentOS/Rocky:

```
$ dnf install -y python3-devel gcc libffi-devel
```

On Ubuntu:

```
$ apt install -y python3-dev gcc libffi-dev python3-venv
```

If installing Kayobe from source, then Git is required for cloning and working with the source code repository.

On CentOS/Rocky:

```
$ dnf install -y git
```

On Ubuntu:

```
$ apt install -y git
```

On Ubuntu, ensure that `/usr/bin/python` points to a Python 3 interpreter:

```
$ apt install -y python-is-python3
```

### 3.4.2 Local directory structure

The directory structure for a Kayobe Ansible control host environment is configurable, but the following is recommended, where `<base_path>` is the path to a top level directory:

```
<base_path>/
  src/
    kayobe/
    kayobe-config/
    kolla-ansible/
  venvs/
    kayobe/
    kolla-ansible/
```

This pattern ensures that all dependencies for a particular environment are installed under a single top level path, and nothing is installed to a shared location. This allows for the option of using multiple Kayobe environments on the same control host.

Creation of a `kayobe-config` source code repository will be covered in the [configuration guide](#). The Kolla Ansible source code checkout and Python virtual environment will be created automatically by kayobe.

Not all of these directories will be used in all scenarios - if Kayobe or Kolla Ansible are installed from a Python package then the source code repository is not required.

### 3.4.3 Installation from PyPI

This section describes how to install Kayobe from a Python package in a virtualenv. This is supported from Kayobe 5.0.0 onwards.

First, change to the top level directory, and make the directories for source code repositories and python virtual environments:

```
$ cd <base_path>
$ mkdir -p src venvs
```

Create a virtualenv for Kayobe:

```
$ python3 -m venv <base_path>/venvs/kayobe
```

Activate the virtualenv and update pip:

```
$ source <base_path>/venvs/kayobe/bin/activate
(kayobe) $ pip install -U pip
```

If using the latest version of Kayobe:

```
(kayobe) $ pip install kayobe
```

Alternatively, to install a specific release of Kayobe:

```
(kayobe) $ pip install kayobe==5.0.0
```

Finally, deactivate the virtualenv:

```
(kayobe) $ deactivate
```

### 3.4.4 Installation from source

This section describes how to install Kayobe from source in a virtualenv.

First, change to the top level directory, and make the directories for source code repositories and python virtual environments:

```
$ cd <base_path>
$ mkdir -p src venvs
```

Next, obtain the Kayobe source code. For example:

```
$ cd <base_path>/src
$ git clone https://opendev.org/openstack/kayobe.git -b master
```

Create a virtualenv for Kayobe:

```
$ python3 -m venv <base_path>/venvs/kayobe
```

Activate the virtualenv and update pip:

```
$ source <base_path>/venvs/kayobe/bin/activate
(kayobe) $ pip install -U pip
```

Install Kayobe and its dependencies using the source code checkout:

```
(kayobe) $ cd <base_path>/src/kayobe
(kayobe) $ pip install .
```

Finally, deactivate the virtualenv:

```
(kayobe) $ deactivate
```

### Editable source installation

From Kayobe 5.0.0 onwards it is possible to create an [editable install](#) of Kayobe. In an editable install, any changes to the Kayobe source tree will immediately be visible when running any Kayobe commands. To create an editable install, add the `-e` flag:

```
(kayobe) $ cd <base_path>/src/kayobe
(kayobe) $ pip install -e .
```

This is particularly useful when installing Kayobe for development.

## 3.5 Usage

### 3.5.1 Command Line Interface

#### Note

Where a prompt starts with (kayobe) it is implied that the user has activated the Kayobe virtualenv. This can be done as follows:

```
$ source /path/to/venv/bin/activate
```

To deactivate the virtualenv:

```
(kayobe) $ deactivate
```

To see information on how to use the kayobe CLI and the commands it provides:

```
(kayobe) $ kayobe help
```

As the kayobe CLI is based on the `cliff` package (as used by the `openstack` client), it supports tab auto-completion of subcommands. This can be activated by generating and then sourcing the bash completion script:

```
(kayobe) $ kayobe complete > kayobe-complete
(kayobe) $ source kayobe-complete
```

### Working with Ansible Vault

If Ansible Vault has been used to encrypt Kayobe configuration files, it will be necessary to provide the kayobe command with access to vault password. There are four options for doing this:

#### Prompt

Use `kayobe --ask-vault-pass` to prompt for the password.

**File**

Use `kayobe --vault-password-file <file>` to read the password from a (plain text) file.

**Environment variable: KAYOBE\_VAULT\_PASSWORD**

Export the environment variable `KAYOBE_VAULT_PASSWORD` to read the password from the environment.

**Environment variable: ANSIBLE\_VAULT\_PASSWORD\_FILE**

Export the environment variable `ANSIBLE_VAULT_PASSWORD_FILE` to read the password from a (plain text) file, with the path to that file being read from the environment.

**Limiting Hosts**

Sometimes it may be necessary to limit execution of kayobe or kolla-ansible plays to a subset of the hosts. The `--limit <SUBSET>` argument allows the kayobe ansible hosts to be limited. The `--kolla-limit <SUBSET>` argument allows the kolla-ansible hosts to be limited. These two options may be combined in a single command. In both cases, the argument provided should be an [Ansible host pattern](#), and will ultimately be passed to `ansible-playbook` as a `--limit` argument.

**Tags**

[Ansible tags](#) provide a useful mechanism for executing a subset of the plays or tasks in a playbook. The `--tags <TAGS>` argument allows execution of kayobe ansible playbooks to be limited to matching plays and tasks. The `--kolla-tags <TAGS>` argument allows execution of kolla-ansible ansible playbooks to be limited to matching plays and tasks. The `--skip-tags <TAGS>` and `--kolla-skip-tags <TAGS>` arguments allow for avoiding execution of matching plays and tasks.

**Check and diff mode**

Ansible supports [check and diff modes](#), which can be used to improve visibility into changes that would be made on target systems. The Kayobe CLI supports the `--check` argument, and since 11.0.0, the `--diff` argument. Note that these modes are not always guaranteed to work, when some tasks are dependent on earlier ones.

**Avoiding privilege escalation on the control host****Note**

This means that kayobe will not be able to install OS packages or use paths that are not writable for your user.

It is possible to avoid privilege escalation on the control host. To use this feature set the following config option:

Listing 1: \$KAYOBE\_CONFIG\_PATH/globals.yml

```
kayobe_control_host_become: false
```

## 3.6 Configuration Guide

The configuration guide is split into two parts - scenarios and reference. The scenarios section provides information on configuring Kayobe for different scenarios. The reference section provides detailed information on many of Kayobes configuration options.

### 3.6.1 Configuration Scenarios

This section provides information on configuring Kayobe for different scenarios.

#### All in one scenario

##### Note

This documentation is intended as a walk through of the configuration required for a minimal all-in-one overcloud host. If you are looking for an all-in-one environment for test or development, see *Automated Setup*.

This scenario describes how to configure an all-in-one controller and compute node using Kayobe. This is a very minimal setup, and not one that is recommended for a production environment, but is useful for learning about how to use and configure Kayobe.

#### Prerequisites

This scenario requires a basic understanding of Linux, networking and OpenStack.

It also requires a single host running a *supported operating system* (VM or bare metal), with:

- 1 CPU
- 8GB RAM
- 40GB disk
- at least one network interface that has Internet access

You will need access to a user account with passwordless sudo. The default user in a cloud image (e.g. centos or rocky or ubuntu) is typically sufficient. This user will be used to run Kayobe commands. It will also be used by Kayobe to bootstrap other user accounts.


#### Overview

An all in one environment consists of a single node that provides both control and compute services. There is no seed host, and no provisioning of the overcloud host. Customisation is minimal, in order to demonstrate the basic required configuration in Kayobe:

```
+-----+
| Overcloud host |
```


(continues on next page)

(continued from previous page)

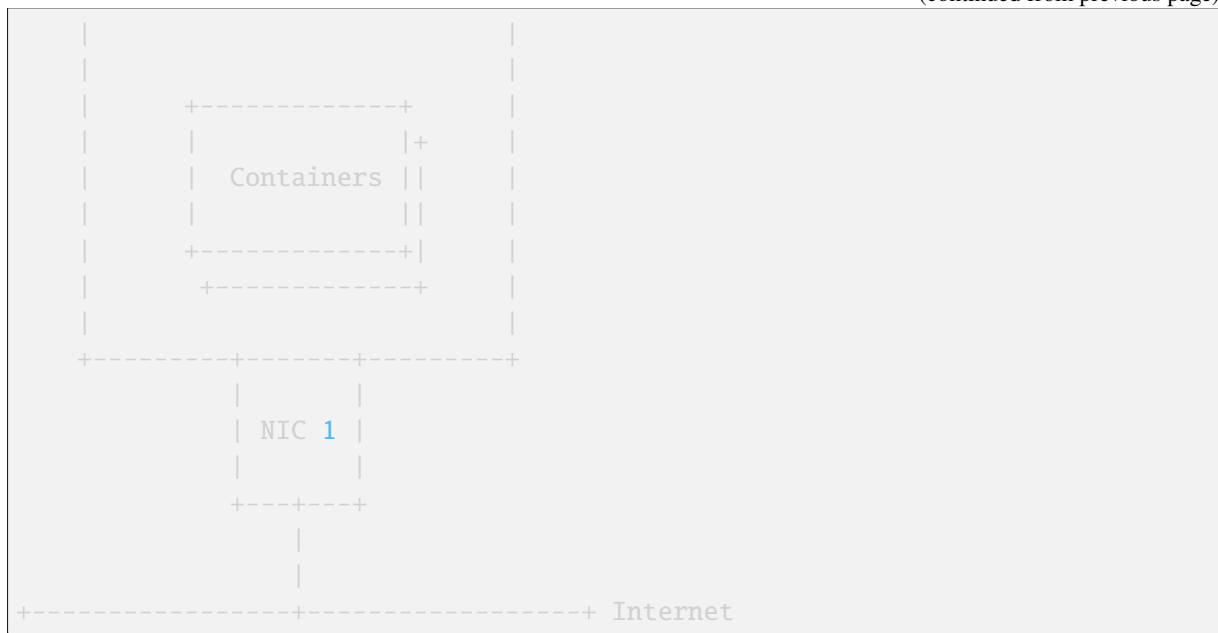

The networking in particular is relatively simple. The main interface of the overcloud host, labelled NIC 1 in the above diagram, will be used only for connectivity to the host and Internet access. A single Kayobe network called `aio` carries all control plane traffic, and is based on virtual networking that is local to the host.

Later in this tutorial, we will create a dummy interface called `dummy0`, and plug it into a bridge called `br0`:

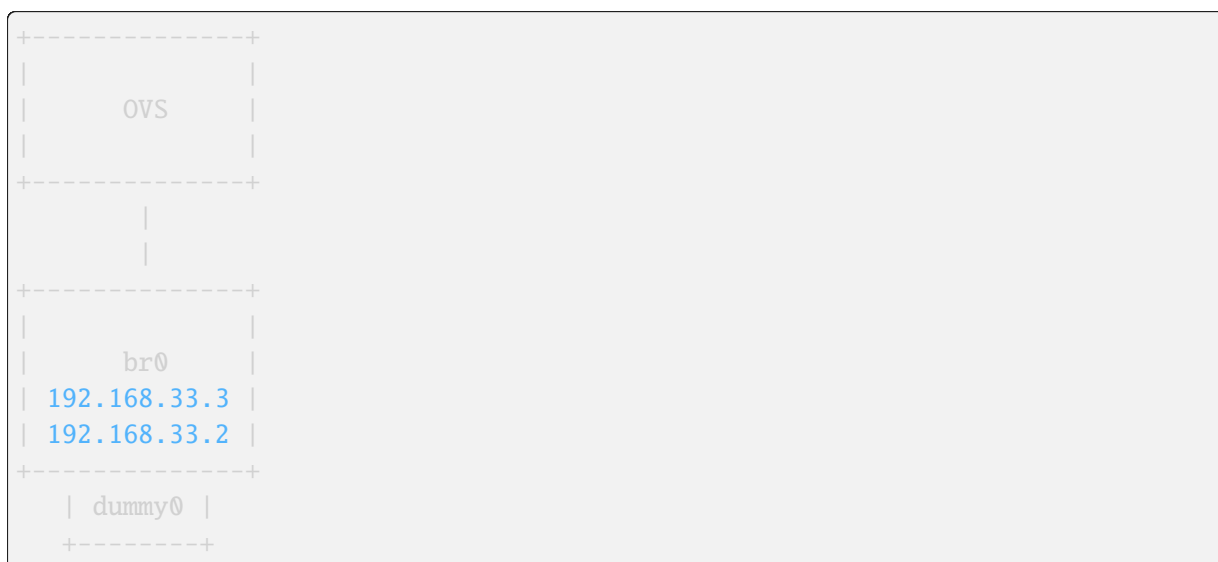

The use of a bridge here allows Kayobe to connect this network to the Open vSwitch network, while maintaining an IP address on the bridge. Ordinarily, `dummy0` would be a NIC providing connectivity to a physical network. We're using a dummy interface here to keep things simple by using a fixed IP subnet, `192.168.33.0/24`. The bridge will be assigned a static IP address of `192.168.33.3`, and this address will be used for various things, including Ansible SSH access and OpenStack control plane traffic. Kolla Ansible will manage a Virtual IP (VIP) address of `192.168.33.2` on `br0`, which will be used for OpenStack API endpoints.

## Contents

### Overcloud

#### Note

This documentation is intended as a walk through of the configuration required for a minimal all-in-one overcloud host. If you are looking for an all-in-one environment for test or development, see *Automated Setup*.

### Preparation

Use the bootstrap user described in *prerequisites* to access the machine.

As described in the *overview*, we will use a bridge (br0) and a dummy interface (dummy0) for control plane networking. Use the following commands to create them and assign the bridge a static IP address of 192.168.33.3:

```
sudo ip l add br0 type bridge
sudo ip l set br0 up
sudo ip a add 192.168.33.3/24 dev br0
sudo ip l add dummy0 type dummy
sudo ip l set dummy0 up
sudo ip l set dummy0 master br0
```

This configuration is not persistent, and must be recreated if the VM is rebooted.

### Installation

Follow the instructions in *Installation* to set up an Ansible control host environment. Typically this would be on a separate machine, but here we are keeping things as simple as possible.

### Configuration

Clone the *kayobe-config* git repository, using the correct branch for the release you are deploying. In this example we will use the master branch.

```
cd <base path>/src
git clone https://opendev.org/openstack/kayobe-config.git -b master
cd kayobe-config
```

This repository is bare, and needs to be populated. The repository includes an example inventory, which should be removed:

```
git rm etc/kayobe/inventory/hosts.example
```

Create an Ansible inventory file and add the machine to it. In this example our machine is called *controller0*. Since this is an all-in-one environment, we add the controller to the *compute* group, however normally dedicated compute nodes would be used.

Listing 2: etc/kayobe/inventory/hosts

```
# This host acts as the configuration management Ansible control host. This
↪ must be
# localhost.
localhost ansible_connection=local

[controllers]
controller0

[compute:children]
controllers
```

The inventory directory also contains group variables for network interface configuration. In this example we will assume that the machine has a single network interface called `dummy0`. We will create a bridge called `br0` and plug `dummy0` into it. Replace the network interface configuration for the controllers group with the following:

Listing 3: etc/kayobe/inventory/group\_vars/controllers/network-interfaces

```
# Controller interface on all-in-one network.
aio_interface: br0

# Interface dummy0 is plugged into the all-in-one network bridge.
aio_bridge_ports:
- dummy0
```

In this scenario a single network called `aio` is used. We must therefore set the name of the default controller networks to `aio`:

Listing 4: etc/kayobe/networks.yml

```
---
# Kayobe network configuration.

#####
↪ #
# Network role to network mappings.

# Map all networks to the all-in-one network.

# Name of the network used for admin access to the overcloud
#admin_oc_net_name:
admin_oc_net_name: aio

# Name of the network used by the seed to manage the bare metal overcloud
# hosts via their out-of-band management controllers.
#oob_oc_net_name:

# Name of the network used by the seed to provision the bare metal overcloud
```

(continues on next page)

(continued from previous page)

```
# hosts.
#provision_oc_net_name:

# Name of the network used by the overcloud hosts to manage the bare metal
# compute hosts via their out-of-band management controllers.
#oob_wl_net_name:

# Name of the network used by the overcloud hosts to provision the bare metal
# workload hosts.
#provision_wl_net_name:

# Name of the network used to expose the internal OpenStack API endpoints.
#internal_net_name:
internal_net_name: aio

# List of names of networks used to provide external network access via
# Neutron.
# Deprecated name: external_net_name
# If external_net_name is defined, external_net_names will default to a list
# containing one item, external_net_name.
#external_net_names:
external_net_names:
  - aio

# Name of the network used to expose the public OpenStack API endpoints.
#public_net_name:
public_net_name: aio

# Name of the network used by Neutron to carry tenant overlay network traffic.
#tunnel_net_name:
tunnel_net_name: aio

# Name of the network used to carry storage data traffic.
#storage_net_name:
storage_net_name: aio

# Name of the network used to carry storage management traffic.
#storage_mgmt_net_name:
storage_mgmt_net_name: aio

# Name of the network used to carry swift storage data traffic.
#swift_storage_net_name:

# Name of the network used to carry swift storage replication traffic.
#swift_storage_replication_net_name:

# Name of the network used to perform hardware introspection on the bare metal
# workload hosts.
#inspection_net_name:
```

(continues on next page)

(continued from previous page)

```
# Name of the network used to perform cleaning on the bare metal workload
# hosts
#cleaning_net_name:

#####
↪#
# Network definitions.

<omitted for clarity>
```

Next the aio network must be defined. This is done using the various attributes described in [Network Configuration](#). These values should be adjusted to match the environment. The `aio_vip_address` variable should be a free IP address in the same subnet for the virtual IP address of the OpenStack API.

Listing 5: etc/kayobe/networks.yml

```
<omitted for clarity>

#####
↪#
# Network definitions.

# All-in-one network.
aio_cidr: 192.168.33.0/24
aio_vip_address: 192.168.33.2

#####
↪#
# Network virtual patch link configuration.

<omitted for clarity>
```

Kayobe will automatically allocate IP addresses. In this case however, we want to ensure that the host uses the same IP address it has currently, to avoid loss of connectivity. We can do this by populating the network allocation file. Use the correct hostname and IP address for your environment.

Listing 6: etc/kayobe/network-allocation.yml

```
---
aio_ips:
  controller0: 192.168.33.3
```

The default OS distribution in Kayobe is CentOS. If using an Ubuntu host, set the `os_distribution` variable in `etc/kayobe/globals.yml` to `ubuntu` or `rocky` if using Rocky Linux..

Listing 7: etc/kayobe/globals.yml

```
os_distribution: "ubuntu"
```

Kayobe uses a bootstrap user to create a `stack` user account. By default, this user is `centos` on CentOS, `rocky` on Rocky and `ubuntu` on Ubuntu, in line with the default user in the official cloud images. If you

are using a different bootstrap user, set the `controller_bootstrap_user` variable in `etc/kayobe/controllers.yml`. For example, to set it to `cloud-user` (as seen in MAAS):

Listing 8: `etc/kayobe/controllers.yml`

```
controller_bootstrap_user: "cloud-user"
```

By default, on systems with SELinux disabled, Kayobe will put SELinux in permissive mode and reboot the system to apply the change. In a test or development environment this can be a bit disruptive, particularly when using ephemeral network configuration. To avoid rebooting the system after enabling SELinux, set `selinux_do_reboot` to `false` in `etc/kayobe/globals.yml`.

Listing 9: `etc/kayobe/globals.yml`

```
selinux_do_reboot: false
```

In a development environment, we may wish to tune some Kolla Ansible variables. Using QEMU as the virtualisation type will be necessary if KVM is not available. Reducing the number of OpenStack service workers helps to avoid using too much memory.

Listing 10: `etc/kayobe/kolla/globals.yml`

```
# Most development environments will use nested virtualisation, and we can't
# guarantee that nested KVM support is available. Use QEMU as a lowest common
# denominator.
nova_compute_virt_type: qemu

# Reduce the control plane's memory footprint by limiting the number of worker
# processes to one per-service.
openstack_service_workers: "1"
```

We can see the changes that have been made to the configuration.

```
cd <base path>/src/kayobe-config
git status

On branch master
Your branch is up to date with 'origin/master'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    deleted:    etc/kayobe/inventory/hosts.example

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   etc/kayobe/globals.yml
    modified:   etc/kayobe/inventory/group_vars/controllers/network-interfaces
    modified:   etc/kayobe/kolla/globals.yml
    modified:   etc/kayobe/networks.yml

Untracked files:
```

(continues on next page)

(continued from previous page)

```
(use "git add <file>..." to include in what will be committed)
etc/kayobe/inventory/hosts
etc/kayobe/network-allocation.yml
```

The `git diff` command is also helpful. Once all configuration changes have been made, they should be committed to the kayobe-config git repository.

```
cd <base path>/src/kayobe-config
git add etc/kayobe/inventory/hosts etc/kayobe/network-allocation.yml
git add --update
git commit -m "All in one scenario config"
```

In a real environment these changes would be pushed to a central repository.

## Deployment

We are now ready to perform a deployment.

Activate the Kayobe virtual environment:

```
cd <base path>/venvs/kayobe
source bin/activate
```

Activate the Kayobe configuration environment:

```
cd <base path>/src/kayobe-config
source kayobe-env
```

Bootstrap the control host:

```
kayobe control host bootstrap
```

Configure the overcloud host:

```
kayobe overcloud host configure
```

After this command has run, some files in the kayobe-config repository will have changed. Kayobe performs static allocation of IP addresses, and tracks them in `etc/kayobe/network-allocation.yml`. Normally there may be changes to this file, but in this case we manually added the IP address of `controller0` earlier. Kayobe uses tools provided by Kolla Ansible to generate passwords, and stores them in `etc/kayobe/kolla/passwords.yml`. It is important to track changes to this file.

```
cd <base path>/src/kayobe-config
git add etc/kayobe/kolla/passwords.yml
git commit -m "Add autogenerated passwords for Kolla Ansible"
```

Pull overcloud container images:

```
kayobe overcloud container image pull
```

Deploy overcloud services:

```
kayobe overcloud service deploy
```

## Testing

The `init-runonce` script provided by Kolla Ansible (not for production) can be used to setup some resources for testing. This includes:

- some flavors
- a [cirros](#) image
- an external network
- a tenant network and router
- security group rules for ICMP, SSH, and TCP ports 8000 and 8080
- an SSH key
- increased quotas

For the external network, use the same subnet as before, with an allocation pool range containing free IP addresses:

```
pip install python-openstackclient
export EXT_NET_CIDR=192.168.33.0/24
export EXT_NET_GATEWAY=192.168.33.3
export EXT_NET_RANGE="start=192.168.33.4,end=192.168.33.254"
source "${KOLLA_CONFIG_PATH:-/etc/kolla}/admin-openrc.sh"
${KOLLA_SOURCE_PATH}/tools/init-runonce
```

Create a server instance, assign a floating IP address, and check that it is accessible.

```
openstack server create --image cirros --flavor m1.tiny --key-name mykey --
↪network demo-net demo1
openstack floating ip create public1
```

The floating IP address is displayed after it is created, in this example it is `192.168.33.4`:

```
openstack server add floating ip demo1 192.168.33.4
ssh cirros@192.168.33.4
```

## 3.6.2 Configuration Reference

This section provides detailed information on many of Kayobes configuration options.

### Kayobe Configuration

This section covers configuration of Kayobe. As an Ansible-based project, Kayobe is for the most part configured using YAML files.

## Configuration Location

Kayobe configuration is by default located in `/etc/kayobe` on the Ansible control host. This location can be overridden to a different location to avoid touching the system configuration directory by setting the environment variable `KAYOBE_CONFIG_PATH`. Similarly, kolla configuration on the Ansible control host will by default be located in `/etc/kolla` and can be overridden via `KOLLA_CONFIG_PATH`.

## Configuration Directory Layout

The Kayobe configuration directory contains Ansible `extra-vars` files and the Ansible inventory. An example of the directory structure is as follows:

```
extra-vars1.yml
extra-vars2.yml
inventory/
  group_vars/
    group1-vars
    group2-vars
  groups
  host_vars/
    host1-vars
    host2-vars
  hosts
```

## Configuration Patterns

Ansibles variable precedence rules are [fairly well documented](#) and provide a mechanism we can use for providing site localisation and customisation of OpenStack in combination with some reasonable default values. For global configuration options, Kayobe typically uses the following patterns:

- Inventory group variables for the *all* group in `<kayobe repo>/ansible/inventory/group_vars/all/*` set **global defaults**. These files should not be modified.
- Inventory group variables for other groups in `<kayobe repo>/ansible/inventory/group_vars/<group>/*` set **defaults for some subsets of hosts**. These files should not be modified.
- Extra-vars files in `${KAYOBE_CONFIG_PATH}/*.yml` set **custom values for global variables** and should be used to apply global site localisation and customisation. By default these variables are commented out.

Additionally, variables can be set on a per-group or per-host basis using inventory group or host variables files in `${KAYOBE_CONFIG_PATH}/inventory/group_vars/*` or `${KAYOBE_CONFIG_PATH}/inventory/host_vars/*` respectively. It should be noted that variables set in extra-vars files take precedence over per-host variables.

## Configuring Kayobe

The [kayobe-config](#) git repository contains a Kayobe configuration directory structure and unmodified configuration files. This repository can be used as a mechanism for version controlling Kayobe configuration. As Kayobe is updated, the configuration should be merged to incorporate any upstream changes with local modifications.

Alternatively, the baseline Kayobe configuration may be copied from a checkout of the Kayobe repository to the Kayobe configuration path:

```
$ mkdir -p ${KAYOBE_CONFIG_PATH:-/etc/kayobe/}
$ cp -r etc/kayobe/* ${KAYOBE_CONFIG_PATH:-/etc/kayobe/}
```

Once in place, each of the YAML and inventory files should be manually inspected and configured as required.

### Inventory

The inventory should contain the following hosts:

#### Ansible Control host

This should be localhost.

#### Seed hypervisor

If provisioning a seed VM, a host should exist for the hypervisor that will run the VM, and should be a member of the `seed-hypervisor` group.

#### Seed

The seed host, whether provisioned as a VM by Kayobe or externally managed, should exist in the seed group.

Cloud hosts and bare metal compute hosts are not required to exist in the inventory if discovery of the control plane hardware is planned, although entries for groups may still be required.

Use of advanced control planes with multiple server roles and customised service placement across those servers is covered in *Control Plane Service Placement*.

### Site Localisation and Customisation

Site localisation and customisation is applied using Ansible extra-vars files in `${KAYOBE_CONFIG_PATH}/*.yaml`.

### Configuration of Ansible

Ansible configuration is described in detail in the [Ansible documentation](#). In addition to the standard locations, Kayobe supports using an Ansible configuration file located in the Kayobe configuration at `${KAYOBE_CONFIG_PATH}/ansible.cfg`. Note that if the `ANSIBLE_CONFIG` environment variable is specified it takes precedence over this file.

### Encryption of Secrets

Kayobe supports the use of [Ansible vault](#) to encrypt sensitive information in its configuration. The `ansible-vault` tool should be used to manage individual files for which encryption is required. Any of the configuration files may be encrypted. Since encryption can make working with Kayobe difficult, it is recommended to follow [best practice](#), adding a layer of indirection and using encryption only where necessary.

## Location of data files

Kayobe needs to know where to find any files not contained within its python package; this includes its Ansible playbooks and any other files it needs for runtime operation. These files are known collectively as data files.

Kayobe will attempt to detect the location of its data files automatically. However, if you have installed kayobe to a non-standard location this auto-detection may fail. It is possible to manually override the path using the environment variable: `KAYOBE_DATA_FILES_PATH`. This should be set to a path with the following structure:

```
requirements.yml
ansible/
  roles/
    ...
  ...
```

Where `ansible` is the `ansible` directory from the source checkout and `...` is an elided representation of any files and subdirectories contained within that directory.

## Ansible

Ansible configuration is described in detail in the [Ansible documentation](#). It is explained elsewhere in this guide how to configure Ansible for *Kayobe* and *Kolla Ansible*.

In this section we cover some options for tuning Ansible for performance and scale.

## SSH pipelining

SSH pipelining is disabled in Ansible by default, but is generally safe to enable, and provides a reasonable performance improvement.

Listing 11: `$KAYOBE_CONFIG_PATH/ansible.cfg`

```
[ssh_connection]
pipelining = True
```

## Forks

By default Ansible executes tasks using a fairly conservative 5 process forks. This limits the parallelism that allows Ansible to scale. Most Ansible control hosts will be able to handle far more forks than this. You will need to experiment to find out the CPU, memory and IO limits of your machine.

For example, to increase the number of forks to 20:

Listing 12: \$KAYOBE\_CONFIG\_PATH/ansible.cfg

```
[defaults]
forks = 20
```

## Fact caching

### Note

Fact caching will not work correctly in Kayobe prior to the Ussuri release.

By default, Ansible gathers facts for each host at the beginning of every play, unless `gather_facts` is set to `false`. With a large number of hosts this can result in a significant amount of time spent gathering facts.

One way to improve this is through Ansibles support for [fact caching](#). In order to make this work with Kayobe, it is necessary to change Ansibles `gathering` configuration option to `smart`. Additionally, it is necessary to use separate fact caches for Kayobe and Kolla Ansible due to some of the facts (e.g. `ansible_facts.user_uid` and `ansible_facts.python`) differing.

## Example

In the following example we configure Kayobe and Kolla Ansible to use fact caching using the `jsonfile` cache plugin.

Listing 13: \$KAYOBE\_CONFIG\_PATH/ansible.cfg

```
[defaults]
gathering = smart
fact_caching = jsonfile
fact_caching_connection = /tmp/kayobe-facts
```

Listing 14: \$KAYOBE\_CONFIG\_PATH/kolla/ansible.cfg

```
[defaults]
gathering = smart
fact_caching = jsonfile
fact_caching_connection = /tmp/kolla-ansible-facts
```

You may also wish to set the expiration timeout for the cache via `[defaults] fact_caching_timeout`.

## Fact gathering

### Fact filtering

Filtering of facts can be used to speed up Ansible. Environments with many network interfaces on the network and compute nodes can experience very slow processing with Kayobe and Kolla Ansible. This happens due to the processing of the large per-interface facts with each task. To avoid storing certain facts, we can use the `kayobe_ansible_setup_filter` variable, which is used as the `filter` argument to the `setup` module.

One case where this is particularly useful is to avoid collecting facts for virtual tap (beginning with t) and bridge (beginning with q) interfaces created by Neutron. These facts are large map values which can consume a lot of resources on the Ansible control host. Kayobe and Kolla Ansible typically do not need to reference them, so they may be filtered. For example, to avoid collecting facts beginning with q or t:

Listing 15: \$KAYOBE\_CONFIG\_PATH/globals.yml

```
kayobe_ansible_setup_filter: "ansible_[!qt]*"
```

Similarly, for Kolla Ansible (notice the similar but different file names):

Listing 16: \$KAYOBE\_CONFIG\_PATH/kolla/globals.yml

```
kolla_ansible_setup_filter: "ansible_[!qt]*"
```

This causes Ansible to collect but not store facts matching that pattern, which includes the virtual interface facts. Currently we are not referencing other facts matching the pattern within Kolla Ansible. Note that including the *ansible* prefix causes meta facts `module_setup` and `gather_subset` to be filtered, but this seems to be the only way to get a good match on the interface facts.

The exact improvement will vary, but has been reported to be as large as 18x on systems with many virtual interfaces.

### Fact gathering subsets

It is also possible to configure which subsets of facts are gathered, via `kayobe_ansible_setup_gather_subset`, which is used as the `gather_subset` argument to the `setup` module. For example, if one wants to avoid collecting facts via `facter`:

Listing 17: \$KAYOBE\_CONFIG\_PATH/globals.yml

```
kayobe_ansible_setup_gather_subset: "all,!facter"
```

Similarly, for Kolla Ansible (notice the similar but different file names):

Listing 18: \$KAYOBE\_CONFIG\_PATH/kolla/globals.yml

```
kolla_ansible_setup_gather_subset: "all,!facter"
```

### Max failure percentage

It is possible to specify a `maximum failure percentage` using `kayobe_max_fail_percentage`. By default this is undefined, which is equivalent to a value of 100, meaning that Ansible will continue execution until all hosts have failed or completed. For example:

Listing 19: \$KAYOBE\_CONFIG\_PATH/globals.yml

```
kayobe_max_fail_percentage: 50
```

A max fail percentage may be set for the `kayobe * host configure` commands using `host_configure_max_fail_percentage`, or for a specific playbook using `<playbook>_max_fail_percentage` where `<playbook>` is the playbook name with dashes replaced with underscores and without the `.yml` extension. For example:

Listing 20: \$KAYOBE\_CONFIG\_PATH/globals.yml

```
kayobe_max_fail_percentage: 50
host_configure_max_fail_percentage: 25
time_max_fail_percentage: 100
```

## OS Distribution

As of the Wallaby 10.0.0 release, Kayobe supports multiple Operating System (OS) distributions. See the [support matrix](#) for a list of supported OS distributions. The same OS distribution should be used throughout the system.

The `os_distribution` variable in `etc/kayobe/globals.yml` can be used to set the OS distribution to use. It may be set to either `centos` or `rocky` or `ubuntu`, and defaults to `rocky`.

The `os_release` variable in `etc/kayobe/globals.yml` can be used to set the release of the OS. When `os_distribution` is set to `centos` it may be set to `9-stream`, and this is its default value. When `os_distribution` is set to `ubuntu` it may be set to `noble`, and this is its default value. When `os_distribution` is set to `rocky` it may be set to `9`, and this is its default value.

These variables are used to set various defaults, including:

- Bootstrap users
- Overcloud host root disk image build configuration
- Seed VM root disk image
- Kolla base container image

### Example: using Ubuntu

In the following example, we set the OS distribution to `ubuntu`:

Listing 21: globals.yml

```
os_distribution: "ubuntu"
```

### Example: using Rocky

In the following example, we set the OS distribution to `rocky`:

Listing 22: globals.yml

```
os_distribution: "rocky"
```

## Physical Network Configuration

Kayobe supports configuration of physical network devices. This feature is optional, and this section may be skipped if network device configuration will be managed via other means.

Devices are added to the Ansible inventory, and configured using Ansibles networking modules. Configuration is applied via the `kayobe physical network configure` command. See [Physical Network](#) for details.

The following switch operating systems are currently supported:

- Arista EOS
- Cumulus Linux (via [Network Command Line Utility \(NCLU\)](#))
- Cumulus Linux (via [NVIDIA User Experience command line utility \(NVUE\)](#))
- Dell OS 6
- Dell OS 9
- Dell OS 10
- Dell PowerConnect
- Juniper Junos OS
- Mellanox MLNX OS

**Note**

When developing switch configuration, it can be helpful to see what commands will be generated. This can be done using the `--display` parameter for `kayobe physical network configure`, which will output switch global and port configuration as terminal output without applying it.

## Adding Devices to the Inventory

Network devices should be added to the Kayobe Ansible inventory, and should be members of the `switches` group.

Listing 23: inventory/hosts

```
[switches]
switch0
switch1
```

In some cases it may be useful to differentiate different types of switches. For example, a `mgmt` network might carry out-of-band management traffic, and a `ctl` network might carry control plane traffic. A group could be created for each of these networks, with each group being a child of the `switches` group.

Listing 24: inventory/hosts

```
[switches:children]
mgmt-switches
ctl-switches

[mgmt-switches]
switch0

[ctl-switches]
switch1
```

## Network Device Configuration

Configuration is typically specific to each network device. It is therefore usually best to add a `host_vars` file to the inventory for each device. Common configuration for network devices can be added in a `group_vars` file for the `switches` group or one of its child groups.

Listing 25: inventory/host\_vars/switch0

```
---
# Host configuration for switch0
ansible_host: 1.2.3.4
```

Listing 26: inventory/host\_vars/switch1

```
---
# Host configuration for switch1
ansible_host: 1.2.3.5
```

Listing 27: inventory/group\_vars/switches

```
---
# Group configuration for 'switches' group.
ansible_user: alice
```

## Common Configuration Variables

The type of switch should be configured via the `switch_type` variable. See [Device-specific Configuration Variables](#) for details of the value to set for each device type.

`ansible_host` should be set to the management IP address used to access the device. `ansible_user` should be set to the user used to access the device.

Global switch configuration is specified via the `switch_config` variable. It should be a list of configuration lines to apply.

Per-interface configuration is specified via the `switch_interface_config` variable. It should be an object mapping switch interface names to configuration objects. Each configuration object contains a description item and a config item. The config item should contain a list of per-interface configuration lines.

The `switch_interface_config_enable_discovery` and `switch_interface_config_disable_discovery` variables take the same format as the `switch_interface_config` variable. They define interface configuration to apply to enable or disable hardware discovery of bare metal compute nodes.

Listing 28: inventory/host\_vars/switch0

```
---
ansible_host: 1.2.3.4

ansible_user: alice

switch_config:
  - global config line 1
  - global config line 2

switch_interface_config:
  interface-0:
    description: controller0
    config:
      - interface-0 config line 1
      - interface-0 config line 2
  interface-1:
    description: compute0
    config:
      - interface-1 config line 1
      - interface-1 config line 2
```

Network device configuration can become quite repetitive, so it can be helpful to define group variables that can be referenced by multiple devices. For example:

Listing 29: inventory/group\_vars/switches

```
---
# Group configuration for the 'switches' group.
switch_config_default:
  - default global config line 1
  - default global config line 2

switch_interface_config_controller:
  - controller interface config line 1
  - controller interface config line 2

switch_interface_config_compute:
  - compute interface config line 1
  - compute interface config line 2
```

Listing 30: inventory/host\_vars/switch0

```
---
ansible_host: 1.2.3.4
```

(continues on next page)

(continued from previous page)

```
ansible_user: alice

switch_config: "{{ switch_config_default }}"

switch_interface_config:
  interface-0:
    description: controller0
    config: "{{ switch_interface_config_controller }}"
  interface-1:
    description: compute0
    config: "{{ switch_interface_config_compute }}"
```

## Support for Older Devices

Some network devices may use SSH key exchange algorithms that are no longer supported by the Ansible control host. This will cause `ssh-keyscan` to fail, preventing Kayobe from configuring the devices. To work around this, set `switch_skip_keyscan` to `true` for the affected devices. The SSH known hosts file on the Ansible control host will need to be populated manually.

## Device-specific Configuration Variables

### Arista EOS

Configuration for these devices is applied using the `arista-switch` Ansible role in Kayobe. The role configures Arista switches using the `eos` Ansible modules.

`switch_type` should be set to `arista`.

- `ansible_host` is the hostname or IP address. Optional.
- `ansible_user` is the SSH username.
- `ansible_ssh_pass` is the SSH password.
- `ansible_connection` should be `ansible.netcommon.network_cli`.
- `ansible_network_os` should be `arista.eos.eos`.
- `ansible_become` should be `true`.
- `ansible_become_method` should be `enable`.

### Cumulus Linux (with NCLU)

Configuration for these devices is applied using the `nclu` Ansible module.

`switch_type` should be set to `nclu`.

### Cumulus Linux (with NVUE)

Configuration for these devices is applied using the `nvidia.nvue.command` Ansible module.

`switch_type` should be set to `nvue`.

## SSH configuration

As with any non-switch host in the inventory, the `nclu` and `nvidia.nvue.command` modules rely on the default connection parameters used by Ansible:

- `ansible_host` is the hostname or IP address. Optional.
- `ansible_user` is the SSH username.

## Dell OS6, OS9, and OS10

Configuration for these devices is applied using the `dellos6_config`, `dellos9_config`, and `dellos10_config` Ansible modules.

`switch_type` should be set to `dellos6`, `dellos9`, or `dellos10`.

`switch_config_save` may be set to `true` to enable saving configuration after it has been applied.

### Provider

- `ansible_host` is the hostname or IP address. Optional.
- `ansible_user` is the SSH username.
- `ansible_ssh_pass` is the SSH password.
- `switch_auth_pass` is the enable password.

Alternatively, set `switch_dellos_provider` to the value to be passed as the `provider` argument to the `dellos*_config` module.

## Dell PowerConnect

Configuration for these devices is applied using the `stackhpc.network.dell_powerconnect_switch` Ansible role. The role uses the `expect` Ansible module to automate interaction with the switch CLI via SSH.

`switch_type` should be set to `dell-powerconnect`.

### Provider

- `ansible_host` is the hostname or IP address. Optional.
- `ansible_user` is the SSH username.
- `switch_auth_pass` is the SSH password.

## Juniper Junos OS

Configuration for these devices is applied using the `junos_config` Ansible module.

`switch_type` should be set to `junos`.

`switch_junos_config_format` may be used to set the format of the configuration. The variable is passed as the `src_format` argument to the `junos_config` module. The default value is `text`.

## Provider

- `ansible_host` is the hostname or IP address. Optional.
- `ansible_user` is the SSH username.
- `ansible_ssh_pass` is the SSH password. Mutually exclusive with `ansible_ssh_private_key_file`.
- `ansible_ssh_private_key_file` is the SSH private key file. Mutually exclusive with `ansible_ssh_pass`.
- `switch_junos_timeout` may be set to a timeout in seconds for communicating with the device.

Alternatively, set `switch_junos_provider` to the value to be passed as the `provider` argument to the `junos_config` module.

## Mellanox MLNX OS

Configuration for these devices is applied using the `stackhpc.network.mellanox_switch` Ansible role. The role uses the `expect` Ansible module to automate interaction with the switch CLI via SSH.

`switch_type` should be set to `mellanox`.

## Provider

- `ansible_host` is the hostname or IP address. Optional.
- `ansible_user` is the SSH username.
- `switch_auth_pass` is the SSH password.

## Network Configuration

Kayobe provides a flexible mechanism for configuring the networks in a system. Kayobe networks are assigned a name which is used as a prefix for variables that define the networks attributes. For example, to configure the `cidr` attribute of a network named `arpanet`, we would use a variable named `arpanet_cidr`.

## Global Network Configuration

Global network configuration is stored in `${KAYOBE_CONFIG_PATH}/networks.yml`. The following attributes are supported:

### **cidr**

CIDR representation (<IP>/<prefix length>) of the networks IP subnet.

### **allocation\_pool\_start**

IP address of the start of Kayobes allocation pool range.

### **allocation\_pool\_end**

IP address of the end of Kayobes allocation pool range.

### **inspection\_allocation\_pool\_start**

IP address of the start of ironic inspectors allocation pool range.

### **inspection\_allocation\_pool\_end**

IP address of the end of ironic inspectors allocation pool range.

**neutron\_allocation\_pool\_start**

IP address of the start of neutrons allocation pool range.

**neutron\_allocation\_pool\_end**

IP address of the end of neutrons allocation pool range.

**gateway**

IP address of the networks default gateway.

**inspection\_gateway**

IP address of the gateway for the hardware introspection network.

**neutron\_gateway**

IP address of the gateway for a neutron subnet based on this network.

**vlan**

VLAN ID.

**mtu**

Maximum Transmission Unit (MTU).

**vip\_address****Note**

Use of the `vip_address` attribute is deprecated. Instead use `kolla_internal_vip_address` and `kolla_external_vip_address`.

Virtual IP address (VIP) used by API services on this network.

**fqdn****Note**

Use of the `fqdn` attribute is deprecated. Instead use `kolla_internal_fqdn` and `kolla_external_fqdn`.

Fully Qualified Domain Name (FQDN) used by API services on this network.

**routes****Note**

`options` is not currently supported on Ubuntu.

List of static IP routes. Each item should be a dict containing the item `cidr`, and optionally `gateway`, `table` and `options`. `cidr` is the CIDR representation of the routes destination. `gateway` is the IP address of the next hop. `table` is the name or ID of a routing table to which the route will be added. `options` is a list of option strings to add to the route.

**rules**

List of IP routing rules.

On CentOS or Rocky, each item should be a string describing an `iproute2` IP routing rule.

On Ubuntu, each item should be a dict containing optional items `from`, `to`, `priority` and `table`. `from` is the source address prefix to match with optional prefix. `to` is the destination address prefix to match with optional prefix. `priority` is the priority of the rule. `table` is the routing table ID.

### **physical\_network**

Name of the physical network on which this network exists. This aligns with the physical network concept in neutron. This may be used to customise the Neutron physical network name used for an external network. This attribute should be set for all external networks or none.

### **libvirt\_network\_name**

A name to give to a Libvirt network representing this network on the seed hypervisor.

### **no\_ip**

Whether to allocate an IP address for this network. If set to `true`, an IP address will not be allocated.

## **Configuring an IP Subnet**

An IP subnet may be configured by setting the `cidr` attribute for a network to the CIDR representation of the subnet.

To configure a network called `example` with the `10.0.0.0/24` IP subnet:

Listing 31: `networks.yml`

```
example_cidr: 10.0.0.0/24
```

## **Configuring an IP Gateway**

An IP gateway may be configured by setting the `gateway` attribute for a network to the IP address of the gateway.

To configure a network called `example` with a gateway at `10.0.0.1`:

Listing 32: `networks.yml`

```
example_gateway: 10.0.0.1
```

This gateway will be configured on all hosts to which the network is mapped. Note that configuring multiple IP gateways on a single host will lead to unpredictable results.

## **Configuring an API Virtual IP Address**

A virtual IP (VIP) address may be configured for use by Kolla Ansible on the internal and external networks, on which the API services will be exposed. The variable will be passed through to the `kolla_internal_vip_address` or `kolla_external_vip_address` Kolla Ansible variable.

To configure a network called `example` with a VIP at `10.0.0.2`:

Listing 33: networks.yml

```
example_vip_address: 10.0.0.2
```

### Configuring an API Fully Qualified Domain Name

A Fully Qualified Domain Name (FQDN) may be configured for use by Kolla Ansible on the internal and external networks, on which the API services will be exposed. The variable will be passed through to the `kolla_internal_fqdn` or `kolla_external_fqdn` Kolla Ansible variable.

To configure a network called `example` with an FQDN at `api.example.com`:

Listing 34: networks.yml

```
example_fqdn: api.example.com
```

### Configuring Static IP Routes

Static IP routes may be configured by setting the `routes` attribute for a network to a list of routes.

To configure a network called `example` with a single IP route to the `10.1.0.0/24` subnet via `10.0.0.1`:

Listing 35: networks.yml

```
example_routes:
- cidr: 10.1.0.0/24
  gateway: 10.0.0.1
```

These routes will be configured on all hosts to which the network is mapped.

If necessary, custom options may be added to the route:

Listing 36: networks.yml

```
example_routes:
- cidr: 10.1.0.0/24
  gateway: 10.0.0.1
  options:
    - onlink
    - metric 400
```

Note that custom options are not currently supported on Ubuntu.

### Configuring a VLAN

A VLAN network may be configured by setting the `vlan` attribute for a network to the ID of the VLAN.

To configure a network called `example` with VLAN ID 123:

Listing 37: networks.yml

```
example_vlan: 123
```

## IP Address Allocation

IP addresses are allocated automatically by Kayobe from the allocation pool defined by `allocation_pool_start` and `allocation_pool_end`. If these variables are undefined, the entire network is used, except for network and broadcast addresses. IP addresses are only allocated if the network `cidr` is set and DHCP is not used (see `bootproto` in *Per-host Network Configuration*). The allocated addresses are stored in `${KAYOBE_CONFIG_PATH}/network-allocation.yml` using the global per-network attribute `ips` which maps Ansible inventory hostnames to allocated IPs.

If static IP address allocation is required, the IP allocation file `network-allocation.yml` may be manually populated with the required addresses.

## Configuring Dynamic IP Address Allocation

To configure a network called `example` with the `10.0.0.0/24` IP subnet and an allocation pool spanning from `10.0.0.4` to `10.0.0.254`:

Listing 38: `networks.yml`

```
example_cidr: 10.0.0.0/24
example_allocation_pool_start: 10.0.0.4
example_allocation_pool_end: 10.0.0.254
```

### Note

This pool should not overlap with an inspection or neutron allocation pool on the same network.

## Configuring Static IP Address Allocation

To configure a network called `example` with statically allocated IP addresses for hosts `host1` and `host2`:

Listing 39: `network-allocation.yml`

```
example_ips:
  host1: 10.0.0.1
  host2: 10.0.0.2
```

## Advanced: Policy-Based Routing

Policy-based routing can be useful in complex networking environments, particularly where asymmetric routes exist, and strict reverse path filtering is enabled.

## Configuring IP Routing Tables

Custom IP routing tables may be configured by setting the global variable `network_route_tables` in `${KAYOBE_CONFIG_PATH}/networks.yml` to a list of route tables. These route tables will be added to `/etc/iproute2/rt_tables`.

To configure a routing table called `examplerroutetable` with ID 1:

Listing 40: networks.yml

```
network_route_tables:
- name: exemplerroutetable
  id: 1
```

To configure route tables on specific hosts, use a host or group variables file.

## Configuring IP Routing Policy Rules

IP routing policy rules may be configured by setting the `rules` attribute for a network to a list of rules. Two formats are supported for defining rules: string format and dict format. String format rules are only supported on CentOS Stream and Rocky Linux systems.

### Dict format rules

The dict format of a rule is a dictionary with optional items `from`, `to`, `priority`, and `table`. `table` should be the name of a route table defined in `network_route_tables`.

To configure a network called `example` with an IP routing policy rule to handle traffic from the subnet `10.1.0.0/24` using the routing table `exemplerroutetable`:

Listing 41: networks.yml

```
example_rules:
- from: 10.1.0.0/24
  table: exemplerroutetable
```

These rules will be configured on all hosts to which the network is mapped.

### String format rules (CentOS Stream/Rocky Linux only)

The string format of a rule is the string which would be appended to `ip rule <add|del>` to create or delete the rule. Note that when using NetworkManager (the default since Zed and in Yoga when using Rocky Linux 9) the table must be specified by ID.

To configure a network called `example` with an IP routing policy rule to handle traffic from the subnet `10.1.0.0/24` using the routing table with ID 1:

Listing 42: networks.yml

```
example_rules:
- from 10.1.0.0/24 table 1
```

These rules will be configured on all hosts to which the network is mapped.

## Configuring IP Routes on Specific Tables

A route may be added to a specific routing table by adding the name or ID of the table to a `table` attribute of the route:

To configure a network called `example` with a default route and a connected (local subnet) route to the subnet `10.1.0.0/24` on the table `exemplerroutetable`:

Listing 43: networks.yml

```
example_routes:
- cidr: 0.0.0.0/0
  gateway: 10.1.0.1
  table: exemplerroutetable
- cidr: 10.1.0.0/24
  table: exemplerroutetable
```

## Configuring Custom Neutron Physical Network Names

By default, Kolla Ansible uses Neutron physical network names starting with `physnet1` through to `physnetN` for each external network interface on a host.

Sometimes we may want to customise the physical network names used. This may be to allow for not all hosts having access to all physical networks, or to use more descriptive names.

For example, in an environment with a separate physical network for Ironic provisioning, controllers might have access to two physical networks, while compute nodes have access to one. We could have a situation where the controllers and computes use inconsistent physical network names. To avoid this, we can add `physical_network` attributes to these networks. In the following example, the Ironic provisioning network is `provision_wl`, and the external network is `external`.

Listing 44: \$KAYOBE\_CONFIG\_PATH/networks.yml

```
provision_wl_physical_network: physnet1
external_physical_network: physnet2
```

This ensures that compute nodes treat `external` as `physnet2`, even though it is the only physical network to which they are attached.

## Per-host Network Configuration

Some network attributes are specific to a hosts role in the system, and these are stored in `${KAYOBE_CONFIG_PATH}/inventory/group_vars/<group>/network-interfaces`. The following attributes are supported:

### interface

The name of the network interface attached to the network.

### parent

The name of the parent interface, when configuring a VLAN interface using `systemd-networkd` syntax.

### bootproto

Boot protocol for the interface. Valid values are `static` and `dhcp`. The default is `static`. When set to `dhcp`, an external DHCP server must be provided.

### defroute

Whether to set the interface as the default route. This attribute can be used to disable configuration of the default gateway by a specific interface. This is particularly useful to ignore a gateway address provided via DHCP. Should be set to a boolean value. The default is `unset`. This attribute is only supported on distributions of the Red Hat family.

**bridge\_ports**

For bridge interfaces, a list of names of network interfaces to add to the bridge.

**bridge\_stp****Note**

For Rocky Linux 9, the `bridge_stp` attribute is set to false to preserve backwards compatibility with network scripts. This is because the Network Manager sets STP to true by default on bridges.

Enable or disable the Spanning Tree Protocol (STP) on this bridge. Should be set to a boolean value. The default is not set on Ubuntu systems.

**bond\_mode**

For bond interfaces, the bonds mode, e.g. 802.3ad.

**bond\_ad\_select**

For bond interfaces, the 802.3ad aggregation selection logic to use. Valid values are `stable` (default selection logic if not configured), `bandwidth` or `count`.

**bond\_slaves**

For bond interfaces, a list of names of network interfaces to act as slaves for the bond.

**bond\_miimon**

For bond interfaces, the time in milliseconds between MII link monitoring.

**bond\_updelay**

For bond interfaces, the time in milliseconds to wait before declaring an interface up (should be multiple of `bond_miimon`).

**bond\_downdelay**

For bond interfaces, the time in milliseconds to wait before declaring an interface down (should be multiple of `bond_miimon`).

**bond\_xmit\_hash\_policy**

For bond interfaces, the `xmit_hash_policy` to use for the bond.

**bond\_lacp\_rate**

For bond interfaces, the `lacp_rate` to use for the bond.

**ethtool\_opts****Note**

`ethtool_opts` is not currently supported on Ubuntu.

Physical network interface options to apply with `ethtool`. When used on bond and bridge interfaces, settings apply to underlying interfaces. This should be a string of arguments passed to the `ethtool` utility, for example `"-G ${DEVICE} rx 8192 tx 8192"`.

**zone**

**Note**

zone is not currently supported on Ubuntu.

The name of `firewalld` zone to be attached to network interface.

## IP Addresses

An interface will be assigned an IP address if the associated network has a `cidr` attribute. The IP address will be assigned from the range defined by the `allocation_pool_start` and `allocation_pool_end` attributes, if one has not been statically assigned in `network-allocation.yml`.

## Configuring Ethernet Interfaces

An Ethernet interface may be configured by setting the `interface` attribute for a network to the name of the Ethernet interface.

To configure a network called `example` with an Ethernet interface on `eth0`:

Listing 45: `inventory/group_vars/<group>/  
network-interfaces`

```
example_interface: eth0
```

## Advanced: Configuring (Renaming) Ethernet Interfaces System Name

The name of the Ethernet interface may be explicitly configured by binding known MAC address of the specific interface to its name by setting the `macaddress` attribute for a network.

**Warning**

Supported only on Ubuntu/Debian operating systems.

To configure a network called `example` with known MAC address `aa:bb:cc:dd:ee:ff` and rename it from a system name (might be `eth0`, `ens3`, or any other name) to the `lan0` (new name):

Listing 46: `inventory/group_vars/<group>/  
network-interfaces`

```
example_interface: lan0
example_macaddress: "aa:bb:cc:dd:ee:ff"
```

**Warning**

The network interface must be down before changing its name. See [issue](#) in the systemd project. So the configured node reboot might be required right after the `seed host configure` or `overcloud host configure` Kayobe commands.

## Configuring Bridge Interfaces

A Linux bridge interface may be configured by setting the `interface` attribute of a network to the name of the bridge interface, and the `bridge_ports` attribute to a list of interfaces which will be added as member ports on the bridge.

To configure a network called `example` with a bridge interface on `breth1`, and a single port `eth1`:

Listing 47: `inventory/group_vars/<group>/network-interfaces`

```
example_interface: breth1
example_bridge_ports:
- eth1
```

Bridge member ports may be Ethernet interfaces, bond interfaces, or VLAN interfaces. In the case of bond interfaces, the bond must be configured separately in addition to the bridge, as a different named network. In the case of VLAN interfaces, the underlying Ethernet interface must be configured separately in addition to the bridge, as a different named network.

## Configuring Bond Interfaces

A bonded interface may be configured by setting the `interface` attribute of a network to the name of the bonds master interface, and the `bond_slaves` attribute to a list of interfaces which will be added as slaves to the master.

To configure a network called `example` with a bond with master interface `bond0` and two slaves `eth0` and `eth1`:

Listing 48: `inventory/group_vars/<group>/network-interfaces`

```
example_interface: bond0
example_bond_slaves:
- eth0
- eth1
```

Optionally, the bond mode and MII monitoring interval may also be configured:

Listing 49: `inventory/group_vars/<group>/network-interfaces`

```
example_bond_mode: 802.3ad
example_bond_miimon: 100
```

Bond slaves may be Ethernet interfaces, or VLAN interfaces. In the case of VLAN interfaces, underlying Ethernet interface must be configured separately in addition to the bond, as a different named network.

## Configuring VLAN Interfaces

A VLAN interface may be configured by setting the `interface` attribute of a network to the name of the VLAN interface. The interface name must normally be of the form `<parent interface>.<VLAN ID>` to ensure compatibility with all supported host operating systems.

To configure a network called `example` with a VLAN interface with a parent interface of `eth2` for VLAN 123:

Listing 50: `inventory/group_vars/<group>/network-interfaces`

```
example_interface: eth2.123
```

To keep the configuration DRY, reference the `networks vlan` attribute:

Listing 51: `inventory/group_vars/<group>/network-interfaces`

```
example_interface: "eth2.{{ example_vlan }}"
```

Alternatively, when using Ubuntu as a host operating system, VLAN interfaces can be named arbitrarily using syntax supported by `systemd-networkd`. In this case, a `parent` attribute must specify the underlying interface:

Listing 52: `inventory/group_vars/<group>/network-interfaces`

```
example_interface: "myvlan{{ example_vlan }}"
example_parent: "eth2"
```

Ethernet interfaces, bridges, and bond master interfaces may all be parents to a VLAN interface.

## Bridges and VLANs

Adding a VLAN interface to a bridge directly will allow tagged traffic for that VLAN to be forwarded by the bridge, whereas adding a VLAN interface to an Ethernet or bond interface that is a bridge member port will prevent tagged traffic for that VLAN being forwarded by the bridge.

For example, if you are bridging `eth1` to `breth1` and want to access VLAN 1234 as a tagged VLAN from the host, while still allowing Neutron to access traffic for that VLAN via Open vSwitch, your setup should look like this:

```
$ sudo brctl show
bridge name      bridge id                STP enabled  interfaces
breth1           8000.56e6b95b4178       no           p-breth1-phy
                                                         eth1

$ sudo ip addr show | grep 1234 | head -1
10: breth1.1234@breth1: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc
↪noqueue state UP group default qlen 1000
```

It should **not** look like this:

```
$ sudo brctl show
bridge name      bridge id                STP enabled  interfaces
breth1           8000.56e6b95b4178       no           p-breth1-phy
                                                         eth1

$ sudo ip addr show | grep 1234 | head -1
10: eth1.1234@eth1: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue
```

(continues on next page)

(continued from previous page)

```
↪state UP group default qlen 1000
```

This second configuration may be desirable to prevent specific traffic, e.g. of the internal API network, from reaching Neutron.

## Domain Name Service (DNS) Resolver Configuration

Kayobe supports configuration of hosts DNS resolver via `resolv.conf`. DNS configuration should be added to `dns.yml`. For example:

Listing 53: `dns.yml`

```
resolv_nameservers:
- 8.8.8.8
- 8.8.4.4
resolv_domain: example.com
resolv_search:
- kayobe.example.com
```

It is also possible to prevent kayobe from modifying `resolv.conf` by setting `resolv_is_managed` to `false`.

## Network Role Configuration

In order to provide flexibility in the systems network topology, Kayobe maps the named networks to logical network roles. A single named network may perform multiple roles, or even none at all. The available roles are:

### Overcloud admin network (`admin_oc_net_name`)

Name of the network used to access the overcloud for admin purposes, e.g for remote SSH access.

### Overcloud out-of-band network (`oob_oc_net_name`)

Name of the network used by the seed to access the out-of-band management controllers of the bare metal overcloud hosts.

### Overcloud provisioning network (`provision_oc_net_name`)

Name of the network used by the seed to provision the bare metal overcloud hosts.

### Workload out-of-band network (`oob_wl_net_name`)

Name of the network used by the overcloud hosts to access the out-of-band management controllers of the bare metal workload hosts.

### Workload provisioning network (`provision_wl_net_name`)

Name of the network used by the overcloud hosts to provision the bare metal workload hosts.

### Workload cleaning network (`cleaning_net_name`)

Name of the network used by the overcloud hosts to clean the baremetal workload hosts.

### Internal network (`internal_net_name`)

Name of the network used to expose the internal OpenStack API endpoints.

### Public network (`public_net_name`)

Name of the network used to expose the public OpenStack API endpoints.

**Tunnel network (tunnel\_net\_name)**

Name of the network used by Neutron to carry tenant overlay network traffic.

**External networks (external\_net\_names, deprecated: external\_net\_name)**

List of names of networks used to provide external network access via Neutron. If `external_net_name` is defined, `external_net_names` defaults to a list containing only that network.

**Storage network (storage\_net\_name)**

Name of the network used to carry storage data traffic.

**Storage management network (storage\_mgmt\_net\_name)**

Name of the network used to carry storage management traffic.

**Swift storage network (swift\_storage\_net\_name)**

Name of the network used to carry Swift storage data traffic. Defaults to the storage network (`storage_net_name`).

**Swift storage replication network (swift\_storage\_replication\_net\_name)**

Name of the network used to carry storage management traffic. Defaults to the storage management network (`storage_mgmt_net_name`).

**Workload inspection network (inspection\_net\_name)**

Name of the network used to perform hardware introspection on the bare metal workload hosts.

These roles are configured in `${KAYOBE_CONFIG_PATH}/networks.yml`.

**Warning**

Changing `external_net_names` after initial deployment has a potential for creating network loops. Kayobe / Ansible will not clean up any items removed from this variable in the OVS. Any additional interfaces that map to network names from the list will be added to the bridge. Any previous entries that should be removed, must be deleted in OVS manually prior to applying changes via Kayobe in order to avoid creating a loop.

## Configuring Network Roles

To configure network roles in a system with two networks, `example1` and `example2`:

Listing 54: `networks.yml`

```
admin_oc_net_name: example1
oob_oc_net_name: example1
provision_oc_net_name: example1
oob_wl_net_name: example1
provision_wl_net_name: example2
internal_net_name: example2
public_net_name: example2
tunnel_net_name: example2
external_net_names:
  - example2
storage_net_name: example2
storage_mgmt_net_name: example2
swift_storage_net_name: example2
```

(continues on next page)

(continued from previous page)

```
swift_replication_net_name: example2
inspection_net_name: example2
cleaning_net_name: example2
```

## Overcloud Admin Network

The admin network is intended to be used for remote access to the overcloud hosts. Kayobe will use the address assigned to the host on this network as the `ansible_host` when executing playbooks. It is therefore a necessary requirement to configure this network.

By default Kayobe will use the overcloud provisioning network as the admin network. It is, however, possible to configure a separate network. To do so, you should override `admin_oc_net_name` in your networking configuration.

If a separate network is configured, the following requirements should be taken into consideration:

- The admin network must be configured to use the same physical network interface as the provisioning network. This is because the PXE MAC address is used to lookup the interface for the cloud-init network configuration that occurs during bifrost provisioning of the overcloud.

## Overcloud Provisioning Network

If using a seed to inspect the bare metal overcloud hosts, it is necessary to define a DHCP allocation pool for the seeds ironic inspector DHCP server using the `inspection_allocation_pool_start` and `inspection_allocation_pool_end` attributes of the overcloud provisioning network.

### Note

This example assumes that the `example` network is mapped to `provision_oc_net_name`.

To configure a network called `example` with an inspection allocation pool:

```
example_inspection_allocation_pool_start: 10.0.0.128
example_inspection_allocation_pool_end: 10.0.0.254
```

### Note

This pool should not overlap with a kayobe allocation pool on the same network.

## Workload Cleaning Network

A separate cleaning network, which is used by the overcloud to clean baremetal workload (compute) hosts, may optionally be specified. Otherwise, the Workload Provisioning network is used. It is necessary to define an IP allocation pool for neutron using the `neutron_allocation_pool_start` and `neutron_allocation_pool_end` attributes of the cleaning network. This controls the IP addresses that are assigned to workload hosts during cleaning.

**Note**

This example assumes that the `example` network is mapped to `cleaning_net_name`.

To configure a network called `example` with a neutron provisioning allocation pool:

```
example_neutron_allocation_pool_start: 10.0.1.128
example_neutron_allocation_pool_end: 10.0.1.195
```

**Note**

This pool should not overlap with a kayobe or inspection allocation pool on the same network.

## Workload Provisioning Network

If using the overcloud to provision bare metal workload (compute) hosts, it is necessary to define an IP allocation pool for the overclouds neutron provisioning network using the `neutron_allocation_pool_start` and `neutron_allocation_pool_end` attributes of the workload provisioning network.

**Note**

This example assumes that the `example` network is mapped to `provision_wl_net_name`.

To configure a network called `example` with a neutron provisioning allocation pool:

```
example_neutron_allocation_pool_start: 10.0.1.128
example_neutron_allocation_pool_end: 10.0.1.195
```

**Note**

This pool should not overlap with a kayobe or inspection allocation pool on the same network.

## Workload Inspection Network

If using the overcloud to inspect bare metal workload (compute) hosts, it is necessary to define a DHCP allocation pool for the overclouds ironic inspector DHCP server using the `inspection_allocation_pool_start` and `inspection_allocation_pool_end` attributes of the workload provisioning network.

**Note**

This example assumes that the `example` network is mapped to `provision_wl_net_name`.

To configure a network called `example` with an inspection allocation pool:

```
example_inspection_allocation_pool_start: 10.0.1.196
example_inspection_allocation_pool_end: 10.0.1.254
```

**Note**

This pool should not overlap with a kayobe or neutron allocation pool on the same network.

## Neutron Networking

**Note**

This assumes the use of the neutron `openvswitch` ML2 mechanism driver for control plane networking.

Certain modes of operation of neutron require layer 2 access to physical networks in the system. Hosts in the `network` group (by default, this is the same as the `controllers` group) run the neutron networking services (Open vSwitch agent, DHCP agent, L3 agent, metadata agent, etc.).

The kayobe network configuration must ensure that the neutron Open vSwitch bridges on the network hosts have access to the external network. If bare metal compute nodes are in use, then they must also have access to the workload provisioning network. This can be done by ensuring that the external and workload provisioning network interfaces are bridges. Kayobe will ensure connectivity between these Linux bridges and the neutron Open vSwitch bridges via a virtual Ethernet pair. See [Configuring Bridge Interfaces](#).

## Network to Host Mapping

Networks are mapped to hosts using the variable `network_interfaces`. Kayobes playbook group variables define some sensible defaults for this variable for hosts in the top level standard groups. These defaults are set using the network roles typically required by the group.

### Seed

By default, the seed is attached to the following networks:

- overcloud admin network
- overcloud out-of-band network
- overcloud provisioning network

This list may be extended by setting `seed_extra_network_interfaces` to a list of names of additional networks to attach. Alternatively, the list may be completely overridden by setting `seed_network_interfaces`. These variables are found in `${KAYOBE_CONFIG_PATH}/seed.yml`.

### Seed Hypervisor

By default, the seed hypervisor is attached to the same networks as the seed.

This list may be extended by setting `seed_hypervisor_extra_network_interfaces` to a list of names of additional networks to attach. Alternatively, the list may be completely overridden by setting

`seed_hypervisor_network_interfaces`. These variables are found in `${KAYOBE_CONFIG_PATH}/seed-hypervisor.yml`.

## Infra VMs

By default, infrastructure VMs are attached to the following network:

- overcloud admin network

This list may be extended by setting `infra_vm_extra_network_interfaces` to a list of names of additional networks to attach. Alternatively, the list may be completely overridden by setting `infra_vm_network_interfaces`. These variables are found in `${KAYOBE_CONFIG_PATH}/infra-vms.yml`.

## Controllers

By default, controllers are attached to the following networks:

- overcloud admin network
- workload (compute) out-of-band network
- workload (compute) provisioning network
- workload (compute) inspection network
- workload (compute) cleaning network
- internal network
- storage network

In addition, if the controllers are also in the network group, they are attached to the following networks:

- public network
- external network
- tunnel network

This list may be extended by setting `controller_extra_network_interfaces` to a list of names of additional networks to attach. Alternatively, the list may be completely overridden by setting `controller_network_interfaces`. These variables are found in `${KAYOBE_CONFIG_PATH}/controllers.yml`.

## Network Hosts

By default, controllers provide Neutron network services and load balancing. If separate network hosts are used (see [Example 1: Adding Network Hosts](#)), they are attached to the following networks:

- overcloud admin network
- internal network
- storage network
- public network
- external network
- tunnel network

This list may be extended by setting `controller_network_host_extra_network_interfaces` to a list of names of additional networks to attach. Alternatively, the list may be completely overridden by setting `controller_network_host_network_interfaces`. These variables are found in `${KAYOBE_CONFIG_PATH}/controllers.yml`.

## Monitoring Hosts

By default, the monitoring hosts are attached to the same networks as the controllers when they are in the `controllers` group. If the monitoring hosts are not in the `controllers` group, they are attached to the following networks by default:

- overcloud admin network
- internal network
- public network

This list may be extended by setting `monitoring_extra_network_interfaces` to a list of names of additional networks to attach. Alternatively, the list may be completely overridden by setting `monitoring_network_interfaces`. These variables are found in `${KAYOBE_CONFIG_PATH}/monitoring.yml`.

## Storage Hosts

By default, the storage hosts are attached to the following networks:

- overcloud admin network
- internal network
- storage network
- storage management network

In addition, if Swift is enabled, they can also be attached to the Swift management and replication networks.

## Virtualised Compute Hosts

By default, virtualised compute hosts are attached to the following networks:

- overcloud admin network
- internal network
- storage network
- tunnel network

This list may be extended by setting `compute_extra_network_interfaces` to a list of names of additional networks to attach. Alternatively, the list may be completely overridden by setting `compute_network_interfaces`. These variables are found in `${KAYOBE_CONFIG_PATH}/compute.yml`.

## Other Hosts

If additional hosts are managed by kayobe, the networks to which these hosts are attached may be defined in a host or group variables file. See *Control Plane Service Placement* for further details.

## Complete Example

The following example combines the complete network configuration into a single system configuration. In our example cloud we have three networks: **management**, **cloud** and **external**:



The **management** network is used to access the servers BMCs and by the seed to inspect and provision the cloud hosts. The **cloud** network carries all internal control plane and storage traffic, and is used by the control plane to provision the bare metal compute hosts. Finally, the **external** network links the cloud to the outside world.

We could describe such a network as follows:

Listing 55: networks.yml

```

---
# Network role mappings.
oob_oc_net_name: management
provision_oc_net_name: management
oob_wl_net_name: management
provision_wl_net_name: cloud
internal_net_name: cloud
public_net_name: external
external_net_name: external
storage_net_name: cloud
storage_mgmt_net_name: cloud
inspection_net_name: cloud

# management network definition.
management_cidr: 10.0.0.0/24
management_allocation_pool_start: 10.0.0.1
management_allocation_pool_end: 10.0.0.127
management_inspection_allocation_pool_start: 10.0.0.128
management_inspection_allocation_pool_end: 10.0.0.254

# cloud network definition.
cloud_cidr: 10.0.1.0/24
cloud_allocation_pool_start: 10.0.1.1
cloud_allocation_pool_end: 10.0.1.127
cloud_inspection_allocation_pool_start: 10.0.1.128
cloud_inspection_allocation_pool_end: 10.0.1.195
cloud_neutron_allocation_pool_start: 10.0.1.196
cloud_neutron_allocation_pool_end: 10.0.1.254

# external network definition.
external_cidr: 10.0.3.0/24
external_allocation_pool_start: 10.0.3.1
external_allocation_pool_end: 10.0.3.127
external_neutron_allocation_pool_start: 10.0.3.128
external_neutron_allocation_pool_end: 10.0.3.254
external_routes:
  - cidr: 10.0.4.0/24
    gateway: 10.0.3.1

```

We can map these networks to network interfaces on the seed and controller hosts:

Listing 56: inventory/group\_vars/seed/  
network-interfaces

```

---
management_interface: eth0

```

Listing 57: inventory/group\_vars/controllers/  
network-interfaces

```
---
management_interface: eth0
cloud_interface: breth1
cloud_bridge_ports:
  - eth1
external_interface: eth2
```

We have defined a bridge for the cloud network on the controllers as this will allow it to be plugged into a neutron Open vSwitch bridge.

Kayobe will allocate IP addresses for the hosts that it manages:

Listing 58: network-allocation.yml

```
---
management_ips:
  seed: 10.0.0.1
  control0: 10.0.0.2
  control1: 10.0.0.3
  control2: 10.0.0.4
cloud_ips:
  control0: 10.0.1.1
  control1: 10.0.1.2
  control2: 10.0.1.3
external_ips:
  control0: 10.0.3.1
  control1: 10.0.3.2
  control2: 10.0.3.3
```

Note that although this file does not need to be created manually, doing so allows for a predictable IP address mapping which may be desirable in some cases.

## Routed Control Plane Networks

This section describes configuration for routed control plane networks. This is an advanced concept and generally applies only to larger deployments that exceed the reasonable size of a broadcast domain.

### Concept

Kayobe currently supports the definition of various different networks - public, internal, tunnel, etc. These typically map to a VLAN or flat network, with an associated IP subnet. When a cloud exceeds the reasonable size of a single VLAN/subnet, or is physically distributed, this approach no longer works.

One way to resolve this is to have multiple subnets that map to a single logical network, and provide routing between them. This is a similar concept to Neutrons [routed provider networks](#), but for the control plane networks.

## Limitations

There are currently a few limitations to using routed control plane networks. Only the following networks have been tested:

- `admin_oc`
- `internal`
- `tunnel`
- `storage`
- `storage_mgmt`

Additionally, only compute nodes and storage nodes have been tested with routed control plane networks - controllers were always placed on the same set of networks during testing.

Bare metal provisioning (of the overcloud or baremetal compute) has not been tested with routed control plane networks, and would not be expected to work without taking additional steps.

## Configuration

The approach to configuring Kayobe for routed control plane networks is as follows:

- create groups in the inventory for the different sets of networks
- place hosts in the appropriate groups
- move `vip_address` and `fqdn` network attributes to *global variables*
- move global network name configuration to group variables
- add new networks to configuration
- add network interface group variables

## Example

In this example, we initially have a number of different logical networks:

- `public_0`
  - `10.0.0.0/24`
  - `VLAN 100`
- `internal_0`
  - `10.0.1.0/24`
  - `VLAN 101`
- `tunnel_0`
  - `10.0.2.0/24`
  - `VLAN 102`
- `storage_0`
  - `10.0.3.0/24`
  - `VLAN 103`

- `storage_mgmt_0`
  - `10.0.4.0/24`
  - `VLAN 104`

Initially the following hosts are connected to these networks:

- `controllers[0:2]: public_0, internal_0, tunnel_0, storage_0`
- `compute[0:127]: internal_0, tunnel_0, storage_0`
- `storage[0:63]: internal_0, storage_0, storage_mgmt_0`

Now consider that we wish to add 128 compute nodes and 64 storage nodes. This would exceed size of the current subnets. We could increase the subnet sizes, but there are good reasons to keep broadcast domains reasonably small.

To resolve this, we can add some more networks:

- `internal_1`
  - `10.1.1.0/24`
  - `VLAN 111`
- `tunnel_1`
  - `10.1.2.0/24`
  - `VLAN 112`
- `storage_1`
  - `10.1.3.0/24`
  - `VLAN 113`
- `storage_mgmt_1`
  - `10.1.4.0/24`
  - `VLAN 114`

The network must provide routes between the following networks:

- `internal_0` and `internal_1`
- `tunnel_0` and `tunnel_1`
- `storage_0` and `storage_1`
- `storage_mgmt_0` and `storage_mgmt_1`

Now we can connect the new hosts to these networks:

- `compute[128:255]: internal_1, tunnel_1, storage_1`
- `storage[64:127]: internal_1, storage_1, storage_mgmt_1`

## Inventory

To model this change we could use an inventory such as the following:

Listing 59: inventory/hosts

```
localhost ansible_connection=local

[controllers]
controller[0:2]

[compute]
compute[0:255]

[storage]
storage[0:127]

[network-0]
controller[0:2]

[compute-network-0]
compute[0:127]

[storage-network-0]
storage[0:63]

[network-0:children]
compute-network-0
storage-network-0

[network-1]

[compute-network-1]
compute[128:255]

[storage-network-1]
storage[64:127]

[network-1:children]
compute-network-1
storage-network-1
```

## Kolla API addresses

Remove all variables defining `vip_address` or `fqdn` network attributes from `networks.yml`, and move the configuration to the *API address variables* in `kolla.yml`.

## Network names

To move global network name configuration to group variables, the following variables should be commented out in `networks.yml`:

Listing 60: `networks.yml`

```
#admin_oc_net_name:
#internal_net_name:
#tunnel_net_name:
#storage_net_name:
#storage_mgmt_net_name:
```

Create group variable files in `inventory/group_vars/network-0` and `inventory/group_vars/network-1`:

Listing 61: `inventory/group_vars/network-0`

```
admin_oc_net_name: internal_0
internal_net_name: internal_0
tunnel_net_name: tunnel_0
storage_net_name: storage_0
storage_mgmt_net_name: storage_mgmt_0
```

Listing 62: `inventory/group_vars/network-1`

```
admin_oc_net_name: internal_1
internal_net_name: internal_1
tunnel_net_name: tunnel_1
storage_net_name: storage_1
storage_mgmt_net_name: storage_mgmt_1
```

## Networks

Now, ensure both sets of networks are defined in `networks.yml`. Static routes are added between the pairs of networks here, although these will depend on your routing configuration. Other network attributes may be necessary, we are including `cidr`, `vlan` and `routes` only here for brevity:

Listing 63: `networks.yml`

```
public_0_cidr: 10.0.0.0/24
public_0_vlan: 100

internal_0_cidr: 10.0.1.0/24
internal_0_vlan: 101
internal_0_routes:
  - cidr: "{{ internal_1_cidr }}"
    gateway: 10.0.1.1

internal_1_cidr: 10.1.1.0/24
internal_1_vlan: 111
internal_1_routes:
```

(continues on next page)

(continued from previous page)

```

- cidr: "{{ internal_0_cidr }}"
  gateway: 10.1.1.1

tunnel_0_cidr: 10.0.2.0/24
tunnel_0_vlan: 102
tunnel_0_routes:
- cidr: "{{ tunnel_1_cidr }}"
  gateway: 10.0.2.1

tunnel_1_cidr: 10.1.2.0/24
tunnel_1_vlan: 112
tunnel_1_routes:
- cidr: "{{ tunnel_0_cidr }}"
  gateway: 10.1.2.1

storage_0_cidr: 10.0.3.0/24
storage_0_vlan: 103
storage_0_routes:
- cidr: "{{ storage_1_cidr }}"
  gateway: 10.0.3.1

storage_1_cidr: 10.1.3.0/24
storage_1_vlan: 113
storage_1_routes:
- cidr: "{{ storage_0_cidr }}"
  gateway: 10.1.3.1

storage_mgmt_0_cidr: 10.0.4.0/24
storage_mgmt_0_vlan: 104
storage_mgmt_0_routes:
- cidr: "{{ storage_mgmt_1_cidr }}"
  gateway: 10.0.4.1

storage_mgmt_1_cidr: 10.1.4.0/24
storage_mgmt_1_vlan: 114
storage_mgmt_1_routes:
- cidr: "{{ storage_mgmt_0_cidr }}"
  gateway: 10.1.4.1

```

## Network interfaces

Since there are now differently named networks, the network interface variables are named differently. This means that we must provide a group variables file for each set of networks and each type of host. For example:

Listing 64: inventory/group\_vars/compute-network-0/  
network-interfaces

```
internal_0_interface: eth0.101
tunnel_0_interface: eth0.102
storage_0_interface: eth0.103
```

Listing 65: inventory/group\_vars/compute-network-1/  
network-interfaces

```
internal_1_interface: eth0.111
tunnel_1_interface: eth0.112
storage_1_interface: eth0.113
```

Listing 66: inventory/group\_vars/storage-network-0/  
network-interfaces

```
internal_0_interface: eth0.101
storage_0_interface: eth0.103
storage_mgmt_0_interface: eth0.104
```

Listing 67: inventory/group\_vars/storage-network-1/  
network-interfaces

```
internal_1_interface: eth0.111
storage_1_interface: eth0.113
storage_mgmt_1_interface: eth0.114
```

The normal interface configuration group variables files inventory/group\_vars/compute/network-interfaces and inventory/group\_vars/storage/network-interfaces should be removed.

Group variables for controller network interfaces may be placed in inventory/group\_vars/controllers/network-interfaces as normal.

## Alternative approach

There is an alternative approach which has not been tested, but may be of interest. Rather than having differently named networks (e.g. internal\_0 and internal\_1), it should be possible to use the same name everywhere (e.g. internal), but define the network attributes in group variables. This approach may be a little less verbose, and allows the same group variables file to set the network interfaces as normal (e.g. via internal\_interface).

## Host Configuration

This section covers configuration of hosts. It does not cover configuration or deployment of containers. Hosts that are configured by Kayobe include:

- Seed hypervisor (kayobe seed hypervisor host configure)
- Seed (kayobe seed host configure)
- Infra VMs (kayobe infra vm host configure)
- Overcloud (kayobe overcloud host configure)

Unless otherwise stated, all host configuration described here is applied to each of these types of host.

#### See also

Ansible tags for limiting the scope of Kayobe commands are included under the relevant sections of this page (for more information see [Tags](#)).

## Configuration Location

Some host configuration options are set via global variables, and others have a variable for each type of host. The latter variables are included in the following files under `${KAYOBE_CONFIG_PATH}`:

- `seed-hypervisor.yml`
- `seed.yml`
- `compute.yml`
- `controller.yml`
- `infra-vms.yml`
- `monitoring.yml`
- `storage.yml`

Note that any variable may be set on a per-host or per-group basis, by using inventory host or group variables - these delineations are for convenience.

## Paths

Several directories are used by Kayobe on the remote hosts. There is a hierarchy of variables in `${KAYOBE_CONFIG_PATH}/globals.yml` that can be used to control where these are located.

- `base_path` (default `/opt/kayobe/`) sets the default base path for various directories.
- `config_path` (default `{{ base_path }}/etc`) is a path in which to store configuration files.
- `image_cache_path` (default `{{ base_path }}/images`) is a path in which to cache downloaded or built images.
- `source_checkout_path` (default `{{ base_path }}/src`) is a path into which to store clones of source code repositories.
- `virtualenv_path` (default `{{ base_path }}/venvs`) is a path in which to create Python virtual environments.

## SSH Known Hosts

*tags:*

`ssh-known-host`

While strictly this configuration is applied to the Ansible control host (`localhost`), it is applied during the `host configure` commands. The `ansible_host` of each host is added as an SSH known host. This is typically the hosts IP address on the admin network (`admin_oc_net_name`), as defined in `${KAYOBE_CONFIG_PATH}/network-allocation.yml` (see [IP Address Allocation](#)).

## Kayobe User Bootstrapping

*tags:*

kayobe-ansible-user

Kayobe uses a user account defined by the `kayobe_ansible_user` variable (in `${KAYOBE_CONFIG_PATH}/globals.yml`) for remote SSH access. By default, this is `stack`.

Typically, the image used to provision these hosts will not include this user account, so Kayobe performs a bootstrapping step to create it, as a different user. In cloud images, there is often a user named after the OS distro, e.g. `centos`, `rocky` or `ubuntu`. This user defaults to the `os_distribution` variable, but may be set via the following variables:

- `seed_hypervisor_bootstrap_user`
- `seed_bootstrap_user`
- `infra_vm_bootstrap_user`
- `compute_bootstrap_user`
- `controller_bootstrap_user`
- `monitoring_bootstrap_user`
- `storage_bootstrap_user`

For example, to set the bootstrap user for controllers to `example-user`:

Listing 68: `controllers.yml`

```
controller_bootstrap_user: example-user
```

## PyPI Mirror and proxy

*tags:*

`pip`

Kayobe supports configuration of a PyPI mirror and/or proxy, via variables in `${KAYOBE_CONFIG_PATH}/pip.yml`. Mirror functionality is enabled by setting the `pip_local_mirror` variable to `true` and proxy functionality is enabled by setting `pip_proxy` variable to a proxy URL.

Kayobe will generate configuration for:

- `pip` to use the mirror and proxy
- `easy_install` to use the mirror

for the list of users defined by `pip_applicable_users` (default `kayobe_ansible_user` and `root`), in addition to the user used for Kolla Ansible (`kolla_ansible_user`). The mirror URL is configured via `pip_index_url`, and `pip_trusted_hosts` is a list of trusted hosts, for which SSL verification will be disabled.

For example, to configure use of the test PyPI mirror at <https://test.pypi.org/simple/>:

Listing 69: pip.yml

```
pip_local_mirror: true
pip_index_url: https://test.pypi.org/simple/
```

To configure use of the PyPI proxy:

Listing 70: pip.yml

```
pip_proxy: http://your_proxy_server:3128
```

## Kayobe Remote Virtual Environment

*tags:*

kayobe-target-venv

By default, Ansible executes modules remotely using the system python interpreter, even if the Ansible control process is executed from within a virtual environment (unless the `local` connection plugin is used). This is not ideal if there are python dependencies that must be installed with isolation from the system python packages. Ansible can be configured to use a virtualenv by setting the host variable `ansible_python_interpreter` to a path to a python interpreter in an existing virtual environment.

If kayobe detects that `ansible_python_interpreter` is set and references a virtual environment, it will create the virtual environment if it does not exist. Typically this variable should be set via a group variable in the inventory for hosts in the `seed`, `seed-hypervisor`, and/or `overcloud` groups.

The default Kayobe configuration in the `kayobe-config` repository sets `ansible_python_interpreter` to `{{ virtualenv_path }}/kayobe/bin/python` for the `seed`, `seed-hypervisor`, and `overcloud` groups.

## Disk Wiping

*tags:*

wipe-disks

Using hosts that may have stale data on their disks could affect the deployment of the cloud. This is not a configuration option, since it should only be performed once to avoid losing useful data. It is triggered by passing the `--wipe-disks` argument to the `host configure` commands.

## Users and Groups

*tags:*

users

Linux user accounts and groups can be configured using the `users_default` variable in `{{KAYOBE_CONFIG_PATH}}/users.yml`. The format of the list is that used by the `users` variable of the `singleplatform-eng.users` role. The following variables can be used to set the users for specific types of hosts:

- `seed_hypervisor_users`
- `seed_users`

- `infra_vm_users`
- `compute_users`
- `controller_users`
- `monitoring_users`
- `storage_users`

In the following example, a single user named `bob` is created. A password hash has been generated via `mkpasswd --method=sha-512`. The user is added to the `wheel` group, and an SSH key is authorised. The SSH public key should be added to the Kayobe configuration.

Listing 71: `users.yml`

```
users_default:
- username: bob
  name: Bob
  password: "$6$wJt9MLWrHlWN8$oXJHbdaslm9guD5EC3Dry1mphuqF9NPeQ430Xk3cXZa2ze/
↪F9F0Txm2KvvDkbdxBDs7ouwdiLTUJ1Ff40.cFU."
  groups:
  - wheel
  append: True
  ssh_key:
  - "{{ lookup('file', kayobe_config_path ~ '/ssh-keys/id_rsa_bob.pub') }}"
```

## DNF Package Repositories

*tags:*

`dnf`

On CentOS and Rocky, Kayobe supports configuration of package repositories via DNF, via variables in `${KAYOBE_CONFIG_PATH}/dnf.yml`.

### Configuration of `dnf.conf`

Global configuration of DNF is stored in `/etc/dnf/dnf.conf`, and options can be set via the `dnf_config` variable. Options are added to the `[main]` section of the file. For example, to configure DNF to use a proxy server:

Listing 72: `dnf.yml`

```
dnf_config:
  proxy: https://proxy.example.com
```

## CentOS/Rocky and EPEL Mirrors

CentOS/Rocky and EPEL mirrors can be enabled by setting `dnf_use_local_mirror` to `true`. CentOS repository mirrors are configured via the following variables:

- `dnf_centos_mirror_host` (default `mirror.centos.org`) is the mirror hostname.
- `dnf_centos_mirror_directory` (default `centos`) is a directory on the mirror in which repositories may be accessed.

Rocky repository mirrors are configured via the following variables:

- `dnf_rocky_mirror_host` (default `dl.rockylinux.org`) is the mirror hostname
- `dnf_rocky_mirror_directory` (default `pub/rocky`) is a directory on the mirror in which repositories may be accessed.

EPEL repository mirrors are configured via the following variables:

- `dnf_epel_mirror_host` (default `download.fedoraproject.org`) is the mirror hostname.
- `dnf_epel_mirror_directory` (default `pub/epel`) is a directory on the mirror in which repositories may be accessed.

For example, to configure CentOS and EPEL mirrors at `mirror.example.com`:

Listing 73: `dnf.yml`

```
dnf_use_local_mirror: true
dnf_centos_mirror_host: mirror.example.com
dnf_epel_mirror_host: mirror.example.com
```

## Custom DNF Repositories

It is also possible to configure a list of custom DNF repositories via the `dnf_custom_repos` variable. The format is a dict/map, with repository names mapping to a dict/map of arguments to pass to the Ansible `yum_repository` module.

For example, the following configuration defines a single DNF repository called `widgets`.

Listing 74: `dnf.yml`

```
dnf_custom_repos:
  widgets:
    baseurl: http://example.com/repo
    file: widgets
    gpgkey: http://example.com/gpgkey
    gpgcheck: yes
```

## Enabling or disabling EPEL

Prior to the Yoga release, the EPEL DNF repository was enabled by default (`dnf_install_epel: true`). Since Yoga, it is disabled by default (`dnf_install_epel: false`).

Previously, EPEL was required to install some packages such as `python-pip`, however this is no longer the case.

It is possible to enable or disable the EPEL DNF repository by setting `dnf_install_epel` to `true` or `false` respectively.

## DNF Automatic

DNF Automatic provides a mechanism for applying regular updates of packages. DNF Automatic is disabled by default, and may be enabled by setting `dnf_automatic_enabled` to `true`.

Listing 75: `dnf.yml`

```
dnf_automatic_enabled: true
```

By default, only security updates are applied. Updates for all packages may be installed by setting `dnf_automatic_upgrade_type` to `default`. This may cause the system to be less predictable as packages are updated without oversight or testing.

## Apt

### *tags:*

apt

On Ubuntu, Apt is used to manage packages and package repositories.

## Apt cache

The Apt cache timeout may be configured via `apt_cache_valid_time` (in seconds) in `etc/kayobe/apt.yml`, and defaults to 3600.

## Apt proxy

Apt can be configured to use a proxy via `apt_proxy_http` and `apt_proxy_https` in `etc/kayobe/apt.yml`. These should be set to the full URL of the relevant proxy (e.g. `http://squid.example.com:3128`).

## Apt configuration

Arbitrary global configuration options for Apt may be defined via the `apt_config` variable in `etc/kayobe/apt.yml` since the Yoga release. The format is a list, with each item mapping to a dict/map with the following items:

- `content`: free-form configuration file content
- `filename`: name of a file in `/etc/apt/apt.conf.d/` in which to write the configuration

The default of `apt_config` is an empty list.

For example, the following configuration tells Apt to use 2 attempts when downloading packages:

Listing 76: `apt.yml`

```
apt_config:
- content: |
    Acquire::Retries 1;
  filename: 99retries
```

## Apt repositories

Kayobe supports configuration of custom Apt repositories via the `apt_repositories` variable in `etc/kayobe/apt.yml` since the Yoga release. The format is a list, with each item mapping to a dict/map with the following items:

- **name:** the <name>.sources filename part. Optional. Default is `kayobe` and the default filename is `kayobe.sources`.
- **types:** whitespace-separated list of repository types, e.g. `deb` or `deb-src` (optional, default is `deb`)
- **url:** URL of the repository
- **suites:** whitespace-separated list of suites, e.g. `noble` (optional, default is `ansible_facts.distribution_release`)
- **components:** whitespace-separated list of components, e.g. `main` (optional, default is `main`)
- **signed\_by:** whitespace-separated list of names of GPG keyring files in `apt_keys_path` (optional, default is `unset`)
- **architecture:** whitespace-separated list of architectures that will be used (optional, default is `unset`)
- **trusted:** boolean value (optional, default is `unset`)

The default of `apt_repositories` is an empty list.

For example, the following configuration defines a single Apt repository:

Listing 77: `apt.yml`

```
apt_repositories:
- types: deb
  url: https://example.com/repo
  suites: noble
  components: all
```

In the following example, the Ubuntu Noble 24.04 repositories are consumed from a local package mirror. The `apt_disable_sources_list` variable is set to `true`, which disables all repositories in `/etc/apt/sources.list`, including the default Ubuntu ones.

Listing 78: `apt.yml`

```
apt_repositories:
- url: http://mirror.example.com/ubuntu/
  suites: noble noble-updates
  components: main restricted universe multiverse
- url: http://mirror.example.com/ubuntu/
  suites: noble-security
  components: main restricted universe multiverse

apt_disable_sources_list: true
```

## Apt keys

Some repositories may be signed by a key that is not one of Apts trusted keys. Kayobe avoids the use of the deprecated `apt-key` utility, and instead allows keys to be downloaded to a directory. This enables repositories to use the `SignedBy` option to state that they are signed by a specific key. This approach is more secure than using globally trusted keys.

Keys to be downloaded are defined by the `apt_keys` variable. The format is a list, with each item mapping to a dict/map with the following items:

- `url`: URL of key
- `filename`: Name of a file in which to store the downloaded key in `apt_keys_path`. The extension should be `.asc` for ASCII-armoured keys, or `.gpg` otherwise.

The default value of `apt_keys` is an empty list.

In the following example, a key is downloaded, and a repository is configured that is signed by the key.

Listing 79: `apt.yml`

```
apt_keys:
- url: https://example.com/GPG-key
  filename: example-key.asc

apt_repositories:
- types: deb
  url: https://example.com/repo
  suites: noble
  components: all
  signed_by: example-key.asc
```

## Apt preferences

Arbitrary global preferences options for Apt may be defined via the `apt_preferences` variable in `etc/kayobe/apt.yml`. The format is a list, with each item mapping to a dict/map with the following items:

- `content`: free-form preferences file content
- `filename`: name of a file in `/etc/apt/preferences.d/` in which to write the configuration

The default of `apt_preferences` is an empty list.

For example, the following configuration tells Apt to only pin a specific package from a custom repo, while preventing installing any other packages from there:

Listing 80: apt.yml

```
apt_preferences:
- content: |
    Package: *
    Pin: origin your.custom.repo
    Pin-Priority: 1

    Package: specific-package
    Pin: origin your.custom.repo
    Pin-Priority: 500
  filename: 99-pin-custom-repo
```

## Apt auth configuration

Some repositories may require authentication using HTTP basic auth. Apt supports specifying credentials in URLs in `sources.list` files, but these files must be world-readable. A more secure setup involves writing credentials to `auth.conf` files which can have more restrictive permissions.

Auth configuration is defined by the `apt_auth` variable. The format is a list, with each item mapping to a dict/map with the following items:

- `machine`: machine entry in the auth file
- `login`: machine entry in the auth file
- `password`: machine entry in the auth file
- `filename`: Name of a file in `/etc/apt/auth.conf.d` in which to store the auth configuration. The extension should be `.conf`.

The default value of `apt_auth` is an empty list.

In the following example, credentials are provided for package repositories at `apt.example.com`.

Listing 81: apt.yml

```
apt_auth:
- machine: apt.example.com
  login: my-username
  password: my-password
  filename: example.conf
```

## Development tools

### tags:

dev-tools

Development tools (additional OS packages) can be configured to be installed on hosts. By default Ddvelopment tools are installed on all `seed-hypervisor`, `seed`, `overcloud` and `infra-vms` hosts.

The following variables can be used to set which packages to install:

- `dev_tools_packages_default`: The list of packages installed by default. (default is: `bash-completion`, `tcpdump` and `vim`)

- `dev_tools_packages_extra`: The list of additional packages installed alongside default packages. (default is an empty list)

In the following example, the list of default packages to be installed on all hosts is modified to replace `vim` with `emacs`. The `bridge-utils` package is added to all overcloud hosts:

Listing 82: `dev-tools.yml`

```
dev_tools_packages_default:  
- bash-completion  
- emacs  
- tcpdump
```

Listing 83: `inventory/group_vars/overcloud/dev-tools`

```
dev_tools_packages_extra:  
- bridge-utils
```

## SELinux

**tags:**

selinux

### Note

SELinux applies to CentOS and Rocky systems only.

SELinux is not supported by Kolla Ansible currently, so it is set to permissive by Kayobe. If necessary, it can be configured to disabled by setting `selinux_state` to `disabled`. Kayobe will reboot systems when required for the SELinux configuration. The timeout for waiting for systems to reboot is `selinux_reboot_timeout`. Alternatively, the reboot may be avoided by setting `selinux_do_reboot` to `false`.

## Network Configuration

**tags:**

network

Configuration of host networking is covered in depth in [Network Configuration](#).

## Firewalld

**tags:**

firewall

Firewalld can be used to provide a firewall on supported systems. Since the Xena release, Kayobe provides support for enabling or disabling firewalld, as well as defining zones and rules. Since the Zed 13.0.0 release, Kayobe added support for configuring firewalld on Ubuntu systems.

The following variables can be used to set whether to enable firewalld:

- `seed_hypervisor_firewalld_enabled`

- `seed_firewalld_enabled`
- `infra_vm_firewalld_enabled`
- `compute_firewalld_enabled`
- `controller_firewalld_enabled`
- `monitoring_firewalld_enabled`
- `storage_firewalld_enabled`

When firewalld is enabled, the following variables can be used to configure a list of zones to create. Each item is a dict containing a zone item:

- `seed_hypervisor_firewalld_zones`
- `seed_firewalld_zones`
- `infra_vm_firewalld_zones`
- `compute_firewalld_zones`
- `controller_firewalld_zones`
- `monitoring_firewalld_zones`
- `storage_firewalld_zones`

The following variables can be used to set a default zone. The default is unset, in which case the default zone will not be changed:

- `seed_hypervisor_firewalld_default_zone`
- `seed_firewalld_default_zone`
- `infra_vm_firewalld_default_zone`
- `compute_firewalld_default_zone`
- `controller_firewalld_default_zone`
- `monitoring_firewalld_default_zone`
- `storage_firewalld_default_zone`

The following variables can be used to set a list of rules to apply. Each item is a dict containing arguments to pass to the firewalld module. Arguments are omitted if not provided, with the following exceptions: offline (default true), permanent (default true), state (default enabled):

- `seed_hypervisor_firewalld_rules`
- `seed_firewalld_rules`
- `infra_vm_firewalld_rules`
- `compute_firewalld_rules`
- `controller_firewalld_rules`
- `monitoring_firewalld_rules`
- `storage_firewalld_rules`

In the following example, firewalld is enabled on controllers. `public` and `internal` zones are created, with their default rules disabled. TCP port 8080 is open in the `internal` zone, and the `http` service is open in the `public` zone:

```
controller_firewalld_enabled: true

controller_firewalld_zones:
- zone: public
- zone: internal

controller_firewalld_rules:
  # Disable default rules in internal zone.
- service: dhcpv6-client
  state: disabled
  zone: internal
- service: samba-client
  state: disabled
  zone: internal
- service: ssh
  state: disabled
  zone: internal
  # Disable default rules in public zone.
- service: dhcpv6-client
  state: disabled
  zone: public
- service: ssh
  state: disabled
  zone: public
  # Enable TCP port 8080 in internal zone.
- port: 8080/tcp
  zone: internal
  # Enable the HTTP service in the public zone.
- service: http
  zone: public
```

## UFW

*tags:*

firewall

Configuration of Uncomplicated Firewall (UFW) on Ubuntu hosts is currently not supported. Instead, UFW is disabled. Since Yoga, this may be avoided as follows:

```
ufw_enabled: true
```

Note that despite the name, this will not actively enable UFW. It may do so in the future.

## Tuned

*tags:*

tuned

### Note

Tuned configuration only supports CentOS/Rocky systems for now.

Built-in tuned profiles can be applied to hosts. The following variables can be used to set a tuned profile to specific types of hosts:

- `seed_hypervisor_tuned_active_built_in_profile`
- `seed_tuned_active_built_in_profile`
- `compute_tuned_active_built_in_profile`
- `controller_tuned_active_built_in_profile`
- `monitoring_tuned_active_built_in_profile`
- `storage_tuned_active_built_in_profile`
- `infra_vm_tuned_active_built_in_profile`

By default, Kayobe applies a tuned profile matching the role of each host in the system:

- `seed_hypervisor: virtual-host`
- `seed: virtual-guest`
- `infrastructure VM: virtual-guest`
- `compute: virtual-host`
- `controllers: throughput-performance`
- `monitoring: throughput-performance`
- `storage: throughput-performance`

For example, to change the tuned profile of controllers to `network-throughput`:

Listing 84: `controllers.yml`

```
controller_tuned_active_built_in_profile: network-throughput
```

## Sysctls

*tags:*

sysctl

Arbitrary `sysctl` configuration can be applied to hosts. The variable format is a dict/map, mapping parameter names to their required values. The following variables can be used to set `sysctl` configuration specific types of hosts:

- `seed_hypervisor_sysctl_parameters`

- `seed_sysctl_parameters`
- `infra_vm_sysctl_parameters`
- `compute_sysctl_parameters`
- `controller_sysctl_parameters`
- `monitoring_sysctl_parameters`
- `storage_sysctl_parameters`

For example, to set the `net.ipv4.ip_forward` parameter to 1 on controllers:

Listing 85: `controllers.yml`

```
controller_sysctl_parameters:  
  net.ipv4.ip_forward: 1
```

## IP routing and Source NAT

*tags:*

```
ip-routing  
snat
```

IP routing and source NAT (SNAT) can be configured on the seed host, which allows it to be used as a default gateway for overcloud hosts. This is disabled by default since the Xena 11.0.0 release, and may be enabled by setting `seed_enable_snat` to `true` in `${KAYOBE_CONFIG_PATH}/seed.yml`.

The seed-hypervisor host also can be configured the same way to be used as a default gateway. This is disabled by default too, and may be enabled by setting `seed_hypervisor_enable_snat` to `true` in `${KAYOBE_CONFIG_PATH}/seed-hypervisor.yml`.

## Disable cloud-init

*tags:*

```
disable-cloud-init
```

cloud-init is a popular service for performing system bootstrapping. If you are not using cloud-init, this section can be skipped.

If using the seeds Bifrost service to provision the control plane hosts, the use of cloud-init may be configured via the `kolla_bifrost_dib_init_element` variable.

cloud-init searches for network configuration in order of increasing precedence; each item overriding the previous. In some cases, on subsequent boots cloud-init can automatically reconfigure network interfaces and cause some issues in network configuration. To disable cloud-init from running after the initial server bootstrapping, set `disable_cloud_init` to `true` in `${KAYOBE_CONFIG_PATH}/overcloud.yml`.

## Disable Glean

*tags:*

```
disable-glean
```

The glean service can be used to perform system bootstrapping, serving a similar role to `cloud-init`. If you are not using glean, this section can be skipped.

If using the seeds Bifrost service to provision the control plane hosts, the use of `glean` may be configured via the `kolla_bifrost_dib_init_element` variable.

After the initial server bootstrapping, the `glean` service can cause problems as it attempts to enable all network interfaces, which can lead to timeouts while booting. To avoid this, the `glean` service is disabled. Additionally, any network interface configuration files generated by `glean` and not overwritten by Kayobe are removed.

## Timezone

*tags:*

timezone

The timezone can be configured via the `timezone` variable in `${KAYOBE_CONFIG_PATH}/time.yml`. The value must be a valid Linux timezone. For example:

Listing 86: `time.yml`

```
timezone: Europe/London
```

## NTP

*tags:*

ntp

Kayobe will configure [Chrony](#) on all hosts in the `ntp` group. The default hosts in this group are:

```
[ntp:children]
# Kayobe will configure Chrony on members of this group.
seed
seed-hypervisor
overcloud
```

This provides a flexible way to opt in or out of having kayobe manage the NTP service.

## Variables

Network Time Protocol (NTP) may be configured via variables in `${KAYOBE_CONFIG_PATH}/time.yml`. The list of NTP servers is configured via `chrony_ntp_servers`, and by default the `pool.ntp.org` servers are used.

Internally, kayobe uses the [mrlesmithjr.chrony](#) Ansible role. Rather than maintain a mapping between the kayobe and `mrlesmithjr.chrony` worlds, all variables are simply passed through. This means you can use all variables that the role defines. For example to change `chrony_maxupdateskew` and override the kayobe defaults for `chrony_ntp_servers`:

Listing 87: `time.yml`

```
chrony_ntp_servers:
- server: 0.debian.pool.ntp.org
  options:
  - option: iburst
```

(continues on next page)

(continued from previous page)

```
- option: minpoll
  val: 8
chrony_maxupdateskew: 150.0
```

## Software RAID

*tags:*

mdadm

While it is possible to use RAID directly with LVM, some operators may prefer the userspace tools provided by mdadm or may have existing software RAID arrays they want to manage with Kayobe.

Software RAID arrays may be configured via the `mdadm_arrays` variable. For convenience, this is mapped to the following variables:

- `seed_hypervisor_mdadm_arrays`
- `seed_mdadm_arrays`
- `infra_vm_mdadm_arrays`
- `compute_mdadm_arrays`
- `controller_mdadm_arrays`
- `monitoring_mdadm_arrays`
- `storage_mdadm_arrays`

The format of these variables is as defined by the `mdadm_arrays` variable of the [mrlesmithjr.mdadm](#) Ansible role.

For example, to configure two of the seeds disks as a RAID1 mdadm array available as `/dev/md0`:

Listing 88: `seed.yml`

```
seed_mdadm_arrays:
- name: md0
  devices:
    - /dev/sdb
    - /dev/sdc
  level: '1'
  state: present
```

## Encryption

*tags:*

luks

Encrypted block devices may be configured via the `luks_devices` variable. For convenience, this is mapped to the following variables:

- `seed_hypervisor_luks_devices`
- `seed_luks_devices`

- `infra_vm_luks_devices`
- `compute_luks_devices`
- `controller_luks_devices`
- `monitoring_luks_devices`
- `storage_luks_devices`

The format of these variables is as defined by the `luks_devices` variable of the [stackhpc.luks](#) Ansible role.

For example, to encrypt the software raid device, `/dev/md0`, on the seed, and make it available as `/dev/mapper/md0crypt`

Listing 89: `seed.yml`

```
seed_luks_devices:
- name: md0crypt
  device: /dev/md0
```

#### Note

It is not yet possible to encrypt the root device.

## LVM

*tags:*

`lvm`

Logical Volume Manager (LVM) physical volumes, volume groups, and logical volumes may be configured via the `lvm_groups` variable. For convenience, this is mapped to the following variables:

- `seed_hypervisor_lvm_groups`
- `seed_lvm_groups`
- `infra_vm_lvm_groups`
- `compute_lvm_groups`
- `controller_lvm_groups`
- `monitoring_lvm_groups`
- `storage_lvm_groups`

The format of these variables is as defined by the `lvm_groups` variable of the [mrlesmithjr.manage\\_lvm](#) Ansible role.

### LVM for libvirt

LVM is not configured by default on the seed hypervisor. It is possible to configure LVM to provide storage for a libvirt storage pool, typically mounted at `/var/lib/libvirt/images`.

To use this configuration, set the `seed_hypervisor_lvm_groups` variable to `"{{ seed_hypervisor_lvm_groups_with_data }}"` and provide a list of disks via the `seed_hypervisor_lvm_group_data_disks` variable.

## LVM for Docker

### Note

In Train and earlier releases of Kayobe, the data volume group was always enabled by default.

A logical volume for storing Docker volume data, mounted at `/var/lib/docker/volumes` can optionally be created. The logical volume is created in volume group called `data`.

This configuration is enabled by the following variables, which default to `false`:

- `compute_lvm_group_data_enabled`
- `controller_lvm_group_data_enabled`
- `seed_lvm_group_data_enabled`
- `infra_vm_lvm_group_data_enabled`
- `storage_lvm_group_data_enabled`

To use this configuration, a list of disks must be configured via the following variables:

- `seed_lvm_group_data_disks`
- `infra_vm_lvm_group_data_disks`
- `compute_lvm_group_data_disks`
- `controller_lvm_group_data_disks`
- `monitoring_lvm_group_data_disks`
- `storage_lvm_group_data_disks`

For example, to configure two of the seeds disks for use by LVM:

Listing 90: `seed.yml`

```
seed_lvm_group_data_disks:  
- /dev/sdb  
- /dev/sdc
```

The Docker volumes LVM volume is assigned a size given by the following variables, with a default value of 75% (of the volume groups capacity):

- `seed_lvm_group_data_lv_docker_volumes_size`
- `infra_vm_lvm_group_data_lv_docker_volumes_size`
- `compute_lvm_group_data_lv_docker_volumes_size`
- `controller_lvm_group_data_lv_docker_volumes_size`
- `monitoring_lvm_group_data_lv_docker_volumes_size`
- `storage_lvm_group_data_lv_docker_volumes_size`

You can control the amount of storage assigned to the docker volumes LV by using the following variable.

Listing 91: controllers.yml

```
controller_lvm_group_data_lv_docker_volumes_size: 100%
```

It is possible to avoid using LVM entirely, thus avoiding the requirement for multiple disks. In this case, set the appropriate <host>\_lvm\_groups variable to an empty list:

Listing 92: storage.yml

```
storage_lvm_groups: []
```

## Custom LVM

To define additional logical logical volumes in the default data volume group, modify one of the following variables:

- seed\_lvm\_group\_data\_lvs
- infra\_vm\_lvm\_group\_data\_lvs
- compute\_lvm\_group\_data\_lvs
- controller\_lvm\_group\_data\_lvs
- monitoring\_lvm\_group\_data\_lvs
- storage\_lvm\_group\_data\_lvs

Include the variable <host>\_lvm\_group\_data\_lv\_docker\_volumes in the list to include the LVM volume for Docker volume data:

Listing 93: monitoring.yml

```
monitoring_lvm_group_data_lvs:
- "{{ monitoring_lvm_group_data_lv_docker_volumes }}"
- lvname: other-vol
  size: 1%
  create: true
  filesystem: ext4
  mount: true
  mntpt: /path/to/mount
```

It is possible to define additional LVM volume groups via the following variables:

- seed\_lvm\_groups\_extra
- infra\_vm\_lvm\_groups\_extra
- compute\_lvm\_groups\_extra
- controller\_lvm\_groups\_extra
- monitoring\_lvm\_groups\_extra
- storage\_lvm\_groups\_extra

For example:

Listing 94: compute.yml

```
compute_lvm_groups_extra:
- vgname: other-vg
  disks:
    - /dev/sdb
  create: true
  lvnames:
    - lvname: other-vol
      size: 100%FREE
      create: true
      mount: false
```

Alternatively, replace the entire volume group list via one of the `<host>_lvm_groups` variables to replace the default configuration with a custom one.

Listing 95: controllers.yml

```
controller_lvm_groups:
- vgname: only-vg
  disks: /dev/sdb
  create: true
  lvnames:
    - lvname: only-vol
      size: 100%
      create: true
      mount: false
```

## Kolla-Ansible Remote Virtual Environment

### *tags:*

```
kolla-ansible
kolla-target-venv
```

See *Context: Remote Execution Environment* for information about remote Python virtual environments for Kolla Ansible.

## Container Engine

### *tags:*

```
docker
podman
```

Kayobe supports the following container engines:

- Podman
- Docker

The container engine can be configured by setting `container_engine` in `container-engine.yml`. The default container engine is `docker`. For example, to use `podman`:

Listing 96: container-engine.yml

```
container_engine: podman
```

## Podman

The `openstack.kolla.podman` role is used to configure Podman. Please refer to the [role defaults](#) for a list of configuration options (making sure to switch to correct branch). These may be overridden via variables in the Ansible inventory or by using extra vars, For example, in `container-engine.yml`:

Listing 97: container-engine.yml

```
podman_storage_driver: overlay
```

A private image registry may be configured via `podman_registry`. If using an insecure (HTTP) registry, set `podman_registry_insecure` to `true`.

## Docker

The `docker_storage_driver` variable sets the Docker storage driver, and by default the `overlay2` driver is used. See [LVM](#) for information about configuring LVM for Docker.

If using an insecure (HTTP) registry, set `docker_registry_insecure` to `true`.

A private Docker registry may be configured via `docker_registry`, with a Certificate Authority (CA) file configured via `docker_registry_ca`.

To use one or more Docker Registry mirrors, use the `docker_registry_mirrors` variable.

If using an MTU other than 1500, `docker_daemon_mtu` can be used to configure this. This setting does not apply to containers using `net=host` (as Kolla Ansibles containers do), but may be necessary when building images.

Dockers live restore feature can be configured via `docker_daemon_live_restore`, although it is disabled by default due to issues observed.

## Compute libvirt daemon

*tags:*

```
libvirt-host
```

### Note

This section is about the libvirt daemon on compute nodes, as opposed to the seed hypervisor.

Since Yoga, Kayobe provides support for deploying and configuring a libvirt host daemon, as an alternative to the `nova_libvirt` container support by Kolla Ansible. The host daemon is not used by default, but it is possible to enable it by setting `kolla_enable_nova_libvirt_container` to `false` in `$KAYOBE_CONFIG_PATH/kolla.yml`.

Migration of hosts from a containerised libvirt to host libvirt is currently not supported.

The following options are available in `$KAYOBE_CONFIG_PATH/compute.yml` and are relevant only when using the `libvirt` daemon rather than the `nova_libvirt` container:

**compute\_libvirt\_enabled**

Whether to enable a host `libvirt` daemon. Default is `true` if `kolla_enable_nova` is `true` and `kolla_enable_nova_libvirt_container` is `false`.

**compute\_libvirt\_conf\_default**

A dict of default configuration options to write to `/etc/libvirt/libvirtd.conf`.

**compute\_libvirt\_conf\_extra**

A dict of additional configuration options to write to `/etc/libvirt/libvirtd.conf`.

**compute\_libvirt\_conf**

A dict of configuration options to write to `/etc/libvirt/libvirtd.conf`. Default is a combination of `compute_libvirt_conf_default` and `compute_libvirt_conf_extra`.

**compute\_libvirtd\_log\_level**

Numerical log level for `libvirtd`. Default is 3.

**compute\_qemu\_conf\_default**

A dict of default configuration options to write to `/etc/libvirt/qemu.conf`.

**compute\_qemu\_conf\_extra**

A dict of additional configuration options to write to `/etc/libvirt/qemu.conf`.

**compute\_qemu\_conf**

A dict of configuration options to write to `/etc/libvirt/qemu.conf`. Default is a combination of `compute_qemu_conf_default` and `compute_qemu_conf_extra`.

**compute\_libvirt\_enable\_sasl**

Whether to enable `libvirt` SASL authentication. Default is the same as `compute_libvirt_tcp_listen`.

**compute\_libvirt\_sasl\_password**

`libvirt` SASL password. Default is unset. This must be defined when `compute_libvirt_enable_sasl` is `true`.

**compute\_libvirt\_enable\_tls**

Whether to enable a `libvirt` TLS listener. Default is `false`.

**compute\_libvirt\_ceph\_repo\_install**

Whether to install a Ceph package repository on CentOS and Rocky hosts. Default is `true`.

**compute\_libvirt\_ceph\_repo\_release**

Ceph package repository release to install on CentOS and Rocky hosts when `compute_libvirt_ceph_repo_install` is `true`. Default is `pacific`.

**Example: custom libvirtd.conf**

To customise the `libvirt` daemon log output to send level 3 to the journal:

Listing 98: `compute.yml`

```
compute_libvirt_conf_extra:  
  log_outputs: "3:journald"
```

### Example: custom qemu.conf

To customise QEMU to avoid adding timestamps to logs:

Listing 99: compute.yml

```
compute_qemu_conf_extra:
  log_timestamp: 0
```

### Example: SASL

SASL authentication is enabled by default. This provides authentication for TCP and TLS connections to the libvirt API. A password is required, and should be encrypted using Ansible Vault.

Listing 100: compute.yml

```
compute_libvirt_sasl_password: !vault |
  $ANSIBLE_VAULT;1.1;AES256
  ␣
  ↪63363937303539373738356236393563636466313130633435353933613637343231303836343933
  ␣
  ↪3463623265653030323665383337376462363434396361320a653737376237353261303066616637
  ␣
  ↪66613562316533313632613433643537346463303363376664396661343835373033326261383065
  ␣
  ↪3731643633656636360a623534313665343066656161333866613338313266613465336332376463
  3234
```

### Example: enabling libvirt TLS listener

To enable the libvirt TLS listener:

Listing 101: compute.yml

```
compute_libvirt_enable_tls: true
```

When the TLS listener is enabled, it is necessary to provide client, server and CA certificates. The following files should be provided:

**cacert.pem**

CA certificate used to sign client and server certificates.

**clientcert.pem**

Client certificate.

**clientkey.pem**

Client key.

**servercert.pem**

Server certificate.

**serverkey.pem**

Server key.

It is recommended to encrypt the key files using Ansible Vault.

The following paths are searched for these files:

- `$KAYOBE_CONFIG_PATH/certificates/libvirt/{{ inventory_hostname }}/`
- `$KAYOBE_CONFIG_PATH/certificates/libvirt/`

In this way, certificates may be generated for each host, or shared using wildcard certificates.

If using Kayobe environments, certificates in the environment take precedence.

Kayobe makes the CA certificate and client certificate and key available to Kolla Ansible, for use by the `nova_compute` service.

### Example: disabling Ceph repository installation

On CentOS and Rocky hosts, a CentOS Storage SIG Ceph repository is installed that provides more recent Ceph libraries than those available in CentOS/Rocky AppStream. This may be necessary when using Ceph for Cinder volumes or Nova ephemeral block devices. In some cases, such as when using local package mirrors, the upstream repository may not be appropriate. The installation of the repository may be disabled as follows:

Listing 102: `compute.yml`

```
compute_libvirt_ceph_repo_install: false
```

### Example: installing additional packages

In some cases it may be useful to install additional packages on compute hosts for use by libvirt. The `stackhpc.libvirt-host` Ansible role supports this via the `libvirt_host_extra_daemon_packages` variable. The variable should be defined via group variables in the Ansible inventory, to avoid applying the change to the seed hypervisor. For example, to install the `trousers` package used for accessing TPM hardware:

Listing 103: `inventory/group_vars/compute/libvirt`

```
libvirt_host_extra_daemon_packages:  
- trousers
```

## Swap

*tags:*

swap

Swap files and devices may be configured via the `swap` variable. For convenience, this is mapped to the following variables:

- `seed_swap`
- `seed_hypervisor_swap`
- `infra_vm_swap`
- `compute_swap`
- `controller_swap`
- `monitoring_swap`

- `storage_swap`

The format is a list, with each item mapping to a dict/map. For a swap device, the following item should be present:

- `device`: Absolute path to a swap device.

For a swap file, the following items should be present:

- `path`: Absolute path to a swap file to create.
- `size_mb`: Size of the swap file in MiB.

The default value of `swap` is an empty list.

### Example: enabling swap using a swap partition

The following example defines a swap device using an existing `/dev/sda3` partition on controller hosts:

Listing 104: `controllers.yml`

```
controller_swap:
- device: /dev/sda3
```

### Example: enabling swap using a swap file

The following example defines a 1GiB swap file that will be created at `/swapfile` on compute hosts:

Listing 105: `compute.yml`

```
compute_swap:
- path: /swapfile
  size_mb: 1024
```

## AppArmor for the libvirt container

**tags:**

`apparmor-libvirt`

### Note

Prior to the Yoga release, this was handled by the `kolla-ansible bootstrap-servers` command.

On Ubuntu systems running the `nova_libvirt` Kolla container, AppArmor rules for libvirt are disabled.

## Adding entries to `/etc/hosts`

**tags:**

`etc-hosts`

**Note**

Prior to the Yoga release, this was handled by the `kolla-ansible bootstrap-servers` command.

Since Yoga, Kayobe adds entries to `/etc/hosts` for all hosts in the `overcloud` group. The entries map the hostname and FQDN of a host to its IP address on the internal API network. This may be avoided as follows:

```
customize_etc_hosts: false
```

By default, each host gets an entry for every other host in the `overcloud` group by default. The list of hosts that will be added may be customised:

```
etc_hosts_hosts: "{{ groups['compute'] }}"
```

It should be noted that this functionality requires facts to be populated for all hosts that will be added to any `/etc/hosts` file. When using the `--limit` argument, Kayobe will gather facts for all hosts without facts, including those outside of the limit. Enabling fact caching for Kayobe may reduce the impact of this. This fact gathering process may be avoided as follows:

```
etc_hosts_gather_facts: false
```

## Installing packages required by Kolla Ansible

*tags:*

`kolla-packages`

**Note**

Prior to the Yoga release, this was handled by the `kolla-ansible bootstrap-servers` command.

A small number of packages are required to be installed on the hosts for Kolla Ansible and the services that it deploys, while some others must be removed.

## Logging

*tags:*

`logging`

Kayobe will configure persistent logging for nodes in the following ansible groups:

- `seed-hypervisor`
- `seed`
- `overcloud`
- `infra-vms`

This means that the systemd journal will be written to local storage (instead of to memory) and will allow you to view the journal from previous boots. The storage limit defaults to 10% of the filesystem with a 4GiB hard limit (when using journald defaults). See [journald documentation](#) for more details.

Should you wish to disable this feature, you can set `journald_storage` to `volatile`.

## Kolla Configuration

Anyone using Kayobe to build images should familiarise themselves with the [Kolla projects documentation](#).

## Container Image Build Host

Images are built on hosts in the `container-image-builders` group. The default Kayobe Ansible inventory places the seed host in this group, although it is possible to put a different host in the group, by modifying the inventory.

For example, to build images on `localhost`:

Listing 106: `inventory/groups`

```
[container-image-builders:children]
```

Listing 107: `inventory/hosts`

```
[container-image-builders]
localhost
```

## Kolla Installation

Prior to building container images, Kolla and its dependencies will be installed on the container image build host. The following variables affect the installation of Kolla:

### **kolla\_ctl\_install\_type**

Type of installation, either `binary` (PyPI) or `source` (git). Default is `source`.

### **kolla\_source\_path**

Path to directory for Kolla source code checkout. Default is `{{ source_checkout_path ~ '/kolla' }}`.

### **kolla\_source\_url**

URL of Kolla source code repository if type is `source`. Default is <https://opendev.org/openstack/kolla>.

### **kolla\_source\_version**

Version (branch, tag, etc.) of Kolla source code repository if type is `source`. Default is `{{ openstack_branch }}`, which is the same as the Kayobe upstream branch name.

### **kolla\_venv**

Path to virtualenv in which to install Kolla on the container image build host. Default is `{{ virtualenv_path ~ '/kolla' }}`.

### **kolla\_build\_config\_path**

Path in which to generate kolla configuration. Default is `{{ config_path ~ '/kolla' }}`.

For example, to install from a custom Git repository:

Listing 108: kolla.yml

```
kolla_source_url: https://git.example.com/kolla
kolla_source_version: downstream
```

## Global Configuration

The following variables are global, affecting all container images. They are used to generate the Kolla configuration file, `kolla-build.conf`, and also affect *Kolla Ansible configuration*.

### **kolla\_base\_arch**

Kolla base container image architecture. Options are `x86_64`, `aarch64`. Default is `{{ ansible_facts.architecture }}`.

### **kolla\_base\_distro**

Kolla base container image distribution. Options are `centos`, `debian`, `rocky` or `ubuntu`. Default is `{{ os_distribution }}`.

### **kolla\_base\_distro\_version**

Kolla base container image distribution version. Default is dependent on `kolla_base_distro`.

### **kolla\_docker\_namespace**

Docker namespace to use for Kolla images. Default is `kolla`.

### **kolla\_docker\_registry**

URL of docker registry to use for Kolla images. Default is to use the value of `docker_registry` or `podman_registry`, depending on the value of `container_engine` (see *Container Engine*).

### **kolla\_docker\_registry\_username**

Username to use to access a docker registry. Default is not set, in which case the registry will be used without authentication.

### **kolla\_docker\_registry\_password**

Password to use to access a docker registry. Default is not set, in which case the registry will be used without authentication.

### **kolla\_openstack\_release**

Kolla OpenStack release version. This should be a Docker image tag. Default is the OpenStack release name (e.g. `rocky`) on stable branches and tagged releases, or `master` on the Kayobe master branch.

### **kolla\_tag**

Kolla container image tag. This is the tag that will be applied to built container images. Default is `kolla_openstack_release`.

For example, to build the Kolla rocky images with a namespace of `example`, and a private Docker registry at `registry.example.com:4000`, using the `zed` release:

Listing 109: kolla.yml

```
kolla_base_distro: rocky
kolla_docker_namespace: example
kolla_docker_registry: registry.example.com:4000
kolla_openstack_release: zed
```

The `ironic-api` image built with this configuration would be referenced as follows:

```
registry.example.com:4000/example/ironic-api:zed-rocky-9
```

Further customisation of the Kolla configuration file can be performed by writing a file at ``${KAYOBE_CONFIG_PATH}/kolla/kolla-build.conf`. For example, to enable debug logging:

Listing 110: `kolla/kolla-build.conf`

```
[DEFAULT]
debug = True
```

## Seed Images

The `kayobe seed container image build` command builds images for the seed services. The only image required for the seed services is the `bifrost-deploy` image.

## Overcloud Images

The `kayobe overcloud container image build` command builds images for the control plane. The default set of images built depends on which services and features are enabled via the `kolla_enable_<service>` flags in ``${KAYOBE_CONFIG_PATH}/kolla.yml`.

For example, the following configuration will enable the Magnum service and add the `magnum-api` and `magnum-conductor` containers to the set of overcloud images that will be built:

Listing 111: `kolla.yml`

```
kolla_enable_magnum: true
```

If a required image is not built when the corresponding flag is set, check the image sets defined in `overcloud_container_image_sets` in `ansible/inventory/group_vars/all/kolla`.

## Image Customisation

There are three main approaches to customising the Kolla container images:

1. Overriding Jinja2 blocks
2. Overriding Jinja2 variables
3. Source code locations

### Overriding Jinja2 blocks

Kollas images are defined via Jinja2 templates that generate Dockerfiles. Jinja2 blocks are frequently used to allow specific statements in one or more Dockerfiles to be replaced with custom statements. See the [Kolla documentation](#) for details.

Blocks are configured via the `kolla_build_blocks` variable, which is a dict mapping Jinja2 block names in to their contents.

For example, to override the block header to add a custom label to every image:

Listing 112: kolla.yml

```
kolla_build_blocks:  
  header: |  
    LABEL foo="bar"
```

This will result in Kayobe generating a `template-override.j2` file with the following content:

Listing 113: template-override.j2

```
{% extends parent_template %}  
  
{% block header %}  
LABEL foo="bar"  
{% endblock %}
```

## Overriding Jinja2 variables

Jinja2 variables offer another way to customise images. See the [Kolla documentation](#) for details of using variable overrides to modify the list of packages to install in an image.

Variable overrides are configured via the `kolla_build_customizations` variable, which is a dict/map mapping names of variables to override to their values.

For example, to add `mod_auth_openidc` to the list of packages installed in the `keystone-base` image, we can set the variable `keystone_base_packages_append` to a list containing `mod_auth_openidc`.

Listing 114: kolla.yml

```
kolla_build_customizations:  
  keystone_base_packages_append:  
    - mod_auth_openidc
```

This will result in Kayobe generating a `template-override.j2` file with the following content:

Listing 115: template-override.j2

```
{% extends parent_template %}  
  
{% set keystone_base_packages_append = ["mod_auth_openidc"] %}
```

Note that the variable value will be JSON-encoded in `template-override.j2`.

## Source code locations

For source image builds, configuration of source code locations for packages installed in containers by Kolla is possible via the `kolla_sources` variable. The format is a dict/map mapping names of sources to their definitions. See the [Kolla documentation](#) for details. The default is to specify the URL and version of Bifrost, as defined in `${KAYOBE_CONFIG_PATH}/bifrost.yml`.

For example, to specify a custom source location for the `ironic-base` package:

Listing 116: kolla.yml

```
kolla_sources:
  bifrost-base:
    type: "git"
    location: "{{ kolla_bifrost_source_url }}"
    reference: "{{ kolla_bifrost_source_version }}"
  ironic-base:
    type: "git"
    location: https://git.example.com/ironic
    reference: downstream
```

This will result in Kayobe adding the following configuration to kolla-build.conf:

Listing 117: kolla-build.conf

```
[bifrost-base]
type = git
location = https://opendev.org/openstack/bifrost
reference = stable/rocky

[ironic-base]
type = git
location = https://git.example.com/ironic
reference = downstream
```

Note that it is currently necessary to include the Bifrost source location if using a seed.

## Plugins & additions

These features can also be used for installing **plugins** and **additions** to source type images.

For example, to install a **networking-ansible** plugin in the **neutron-server** image:

Listing 118: kolla.yml

```
kolla_sources:
  bifrost-base:
    type: "git"
    location: "{{ kolla_bifrost_source_url }}"
    reference: "{{ kolla_bifrost_source_version }}"
  neutron-server-plugin-networking-ansible:
    type: "git"
    location: https://git.example.com/networking-ansible
    reference: downstream
```

The **neutron-server** image automatically installs any plugins provided to it. For images that do not, a block such as the following may be required:

Listing 119: kolla.yml

```
kolla_build_blocks:
  neutron_server_footer: |
    ADD plugins-archive /
    pip --no-cache-dir install /plugins/*
```

A similar approach may be used for additions.

## Kolla Ansible Configuration

Kayobe relies heavily on Kolla Ansible for deployment of the OpenStack control plane. Kolla Ansible is installed locally on the Ansible control host (the host from which Kayobe commands are executed), and Kolla Ansible commands are executed from there.

Kolla Ansible configuration is stored in `${KAYOBE_CONFIG_PATH}/kolla.yml`.

## Configuration of Ansible

Ansible configuration is described in detail in the [Ansible documentation](#). In addition to the standard locations, Kayobe supports using an Ansible configuration file located in the Kayobe configuration at `${KAYOBE_CONFIG_PATH}/kolla/ansible.cfg` or `${KAYOBE_CONFIG_PATH}/ansible.cfg`. Note that if the `ANSIBLE_CONFIG` environment variable is specified it takes precedence over this file.

## Kolla Ansible Installation

Prior to deploying containers, Kolla Ansible and its dependencies will be installed on the Ansible control host. The following variables affect the installation of Kolla Ansible:

### **kolla\_ansible\_ctl\_install\_type**

Type of Kolla Ansible control installation. One of `binary` (PyPI) or `source` (git). Default is `source`.

### **kolla\_ansible\_source\_url**

URL of Kolla Ansible source code repository if type is `source`. Default is <https://opendev.org/openstack/kolla-ansible>.

### **kolla\_ansible\_source\_version**

Version (branch, tag, etc.) of Kolla Ansible source code repository if type is `source`. Default is the same as the Kayobe upstream branch.

### **kolla\_ansible\_venv\_extra\_requirements**

Extra requirements to install inside the Kolla Ansible virtualenv. Default is an empty list.

### **kolla\_upper\_constraints\_file**

Upper constraints file for installation of Kolla. Default is `{{ pip_upper_constraints_file }}`, which has a default of [https://releases.openstack.org/constraints/upper/{{ openstack\\_branch }}](https://releases.openstack.org/constraints/upper/{{ openstack_branch }}).

### Example: custom git repository

To install Kolla Ansible from a custom git repository:

Listing 120: `$KAYOBE_CONFIG_PATH/kolla.yml`

```
kolla_ansible_source_url: https://git.example.com/kolla-ansible
kolla_ansible_source_version: downstream
```

### Virtual Environment Extra Requirements

Extra Python packages can be installed inside the Kolla Ansible virtualenv, such as when required by Ansible plugins.

For example, to use the [hashi\\_vault Ansible lookup plugin](#), its `hvac` dependency can be installed using:

Listing 121: `$KAYOBE_CONFIG_PATH/kolla.yml`

```
---
# Extra requirements to install inside the Kolla Ansible virtualenv.
kolla_ansible_venv_extra_requirements:
  - "hvac"
```

### Local environment

The following variables affect the local environment on the Ansible control host. They reference environment variables, and should be configured using those rather than modifying the Ansible variable directly. The file `kayobe-env` in the [kayobe-config git repository](#) sets some sensible defaults for these variables, based on the recommended environment directory structure.

#### **kolla\_ansible\_source\_path**

Path to directory for Kolla Ansible source code checkout. Default is `$KOLLA_SOURCE_PATH`, or `$PWD/src/kolla-ansible`.

#### **kolla\_ansible\_venv**

Path to virtualenv in which to install Kolla Ansible on the Ansible control host. Default is `$KOLLA_VENV_PATH` or `$PWD/venvs/kolla-ansible`.

#### **kolla\_config\_path**

Path to Kolla Ansible configuration directory. Default is `$KOLLA_CONFIG_PATH` or `/etc/kolla`.

### Global Configuration

The following variables are global, affecting all containers. They are used to generate the Kolla Ansible configuration file, `globals.yml`, and also affect [Kolla image build configuration](#).

### Kolla Images

The following variables affect which Kolla images are used, and how they are accessed.

#### **kolla\_base\_distro**

Kolla base container image distribution. Default is `{{ os_distribution }}`.

#### **kolla\_base\_distro\_version**

Kolla base container image distribution version. Default is dependent on `kolla_base_distro`.

**kolla\_docker\_registry**

URL of docker registry to use for Kolla images. Default is not set, in which case Quay.io will be used.

**kolla\_docker\_namespace**

Docker namespace to use for Kolla images. Default is `kolla`.

**kolla\_docker\_registry\_username**

Username to use to access a docker registry. Default is not set, in which case the registry will be used without authentication.

**kolla\_docker\_registry\_password**

Password to use to access a docker registry. Default is not set, in which case the registry will be used without authentication.

**kolla\_openstack\_release**

Kolla OpenStack release version. This should be a Docker image tag. Default is `{{ openstack_release }}`, which takes the OpenStack release name (e.g. `rocky`) on stable branches and tagged releases, or `master` on the Kayobe master branch.

For example, to deploy Kolla rocky images with a namespace of `example`, and a private Docker registry at `registry.example.com:4000`, and the `zed` release.

Listing 122: `$KAYOBE_CONFIG_PATH/kolla.yml`

```
kolla_base_distro: rocky
kolla_docker_namespace: example
kolla_docker_registry: registry.example.com:4000
kolla_openstack_release: zed
```

The deployed `ironic-api` image would be referenced as follows:

```
registry.example.com:4000/example/ironic-api:zed-rocky-9
```

## Ansible

The following variables affect how Ansible accesses the remote hosts.

**kolla\_ansible\_user**

User account to use for Kolla SSH access. Default is `kolla`.

**kolla\_ansible\_group**

Primary group of Kolla SSH user. Default is `kolla`.

**kolla\_ansible\_become**

Whether to use privilege escalation for all operations performed via Kolla Ansible. Default is `false` since the 8.0.0 Ussuri release.

**kolla\_ansible\_target\_venv**

Path to a virtual environment on remote hosts to use for Ansible module execution. Default is `{{ virtualenv_path }}/kolla-ansible`. May be set to `None` to use the system Python interpreter.

## Context: Remote Execution Environment

By default, Ansible executes modules remotely using the system python interpreter, even if the Ansible control process is executed from within a virtual environment (unless the `local` connection plugin is used). This is not ideal if there are python dependencies that must be installed with isolation from the system python packages. Ansible can be configured to use a virtualenv by setting the host variable `ansible_python_interpreter` to a path to a python interpreter in an existing virtual environment.

The variable `kolla_ansible_target_venv` configures the use of a virtual environment on the remote hosts. The default configuration should work in most cases.

## User account creation

Since the Ussuri release, Kayobe creates a user account for Kolla Ansible rather than this being done during Kolla Ansibles `bootstrap-servers` command. This workflow is more compatible with [Ansible fact caching](#), but does mean that Kolla Ansibles `create_kolla_user` variable cannot be used to disable creation of the user account. Instead, set `kolla_ansible_create_user` to `false`.

### `kolla_ansible_create_user`

Whether to create a user account, configure passwordless sudo and authorise an SSH key for Kolla Ansible. Default is `true`.

## OpenStack Logging

The following variable affects OpenStack debug logging.

### `kolla_openstack_logging_debug`

Whether debug logging is enabled for OpenStack services. Default is `false`.

## Example: enabling debug logging

In certain situations it may be necessary to enable debug logging for all OpenStack services. This is not usually advisable in production.

Listing 123: `$KAYOBE_CONFIG_PATH/kolla.yml`

```
---
kolla_openstack_logging_debug: true
```

## API Addresses

### Note

These variables should be used over the deprecated `vip_address` and `fqdn` *network attributes*.

The following variables affect the addresses used for the external and internal API.

### `kolla_internal_vip_address`

Virtual IP address of OpenStack internal API. Default is the `vip_address` attribute of the internal network.

### `kolla_internal_fqdn`

Fully Qualified Domain Name (FQDN) of OpenStack internal API. Default is the `fqdn` attribute

of the internal network if set, otherwise `kolla_internal_vip_address`.

**kolla\_external\_vip\_address**

Virtual IP address of OpenStack external API. Default is the `vip_address` attribute of the external network.

**kolla\_external\_fqdn**

Fully Qualified Domain Name (FQDN) of OpenStack external API. Default is the `fqdn` attribute of the external network if set, otherwise `kolla_external_vip_address`.

## TLS Encryption of APIs

The following variables affect TLS encryption of the public API.

**kolla\_enable\_tls\_external**

Whether TLS is enabled for the public API endpoints. Default is `no`.

**kolla\_external\_tls\_cert**

A TLS certificate bundle to use for the public API endpoints, if `kolla_enable_tls_external` is `true`. Note that this should be formatted as a literal style block scalar.

The following variables affect TLS encryption of the internal API. Currently this requires all Kolla images to be built with the APIs root CA trusted.

**kolla\_enable\_tls\_internal**

Whether TLS is enabled for the internal API endpoints. Default is `no`.

**kolla\_internal\_tls\_cert**

A TLS certificate bundle to use for the internal API endpoints, if `kolla_enable_tls_internal` is `true`. Note that this should be formatted as a literal style block scalar.

The following variables affect the generated `admin-openrc.sh` and `public-openrc.sh` environment files.

**kolla\_public\_openrc\_cacert**

Path to a CA certificate file to use for the `OS_CACERT` environment variable in the `public-openrc.sh` file when TLS is enabled, instead of `kolla_admin_openrc_cacert`.

**kolla\_admin\_openrc\_cacert**

Path to a CA certificate file to use for the `OS_CACERT` environment variable in the `admin-openrc.sh` and `public-openrc.sh` files when TLS is enabled, instead of Kolla Ansibles default.

## Example: enabling TLS for the public API

It is highly recommended to use TLS encryption to secure the public API. Here is an example:

Listing 124: `$KAYOBE_CONFIG_PATH/kolla.yml`

```
---
kolla_enable_tls_external: yes
kolla_external_tls_cert: |
    -----BEGIN CERTIFICATE-----
    ...
    -----END CERTIFICATE-----
kolla_admin_openrc_cacert: /path/to/ca/certificate/bundle
```

### Example: enabling TLS for the internal API

It is highly recommended to use TLS encryption to secure the internal API. Here is an example:

Listing 125: \$KAYOBE\_CONFIG\_PATH/kolla.yml

```

---
kolla_enable_tls_internal: yes
kolla_internal_tls_cert: |
    -----BEGIN CERTIFICATE-----
    ...
    -----END CERTIFICATE-----
kolla_admin_openrc_cacert: /path/to/ca/certificate/bundle

```

### Other certificates

In general, Kolla Ansible expects certificates to be in a directory configured via `kolla_certificates_dir`, which defaults to a directory named `certificates` in the same directory as `globals.yml`. Kayobe follows this pattern, and will pass files and directories added to `${KAYOBE_CONFIG_PATH}/kolla/certificates/` through to Kolla Ansible. This can be useful when enabling backend API TLS encryption, or providing custom CA certificates to be added to the trust store in containers. It is also possible to use this path to provide certificate bundles for the external or internal APIs, as an alternative to `kolla_external_tls_cert` and `kolla_internal_tls_cert`.

Note that Ansible will automatically decrypt these files if they are encrypted via Ansible Vault and it has access to a Vault password.

### Example: adding a trusted custom CA certificate to containers

In an environment with a private CA, it may be necessary to add the root CA certificate to the trust store of containers.

Listing 126: \$KAYOBE\_CONFIG\_PATH

```

kolla/
  certificates/
    ca/
      private-ca.crt

```

These files should be PEM-formatted, and have a `.crt` extension.

### Example: adding certificates for backend TLS

Kolla Ansible backend TLS can be used to provide end-to-end encryption of API traffic.

Listing 127: \$KAYOBE\_CONFIG\_PATH

```

kolla/
  certificates/
    backend-cert.pem
    backend-key.pem

```

See the [Kolla Ansible documentation](#) for how to provide service and/or host-specific certificates and keys.

## Custom Global Variables

Kolla Ansible uses a single file for global variables, `globals.yml`. Kayobe provides configuration variables for all required variables and many of the most commonly used the variables in this file. Some of these are in `$KAYOBE_CONFIG_PATH/kolla.yml`, and others are determined from other sources such as the networking configuration in `$KAYOBE_CONFIG_PATH/networks.yml`.

Additional global configuration may be provided by creating `$KAYOBE_CONFIG_PATH/kolla/globals.yml`. Variables in this file will be templated using Jinja2, and merged with the Kayobe `globals.yml` configuration.

### Example: use a specific tag for each image

For more fine-grained control over images, Kolla Ansible allows a tag to be defined for each image. For example, for `nova-api`:

Listing 128: `$KAYOBE_CONFIG_PATH/kolla/globals.yml`

```
---
# Use a custom tag for the nova-api container image.
nova_api_tag: v1.2.3
```

### Example: debug logging per-service

Enabling debug logging globally can lead to a lot of additional logs being generated. Often we are only interested in a particular service. For example, to enable debug logging for Nova services:

Listing 129: `$KAYOBE_CONFIG_PATH/kolla/globals.yml`

```
---
nova_logging_debug: true
```

## Host variables

Kayobe generates a `host_vars` file for each host in the Kolla Ansible inventory. These contain network interfaces and other host-specific things. Some Kayobe Ansible variables are passed through to Kolla Ansible, as defined by the following variables. The default set of variables should typically be kept. Additional variables may be passed through via the `*_extra` variables, as described below. If a passed through variable is not defined for a host, it is ignored.

### `kolla_seed_inventory_pass_through_host_vars`

List of names of host variables to pass through from kayobe hosts to the Kolla Ansible seed host, if set. See also `kolla_seed_inventory_pass_through_host_vars_map`. The default is:

```
kolla_seed_inventory_pass_through_host_vars:
- "ansible_host"
- "ansible_port"
- "ansible_ssh_private_key_file"
- "kolla_api_interface"
- "kolla_bifrost_network_interface"
```

It is possible to extend this list via `kolla_seed_inventory_pass_through_host_vars_extra`.

**kolla\_seed\_inventory\_pass\_through\_host\_vars\_map**

Dict mapping names of variables in `kolla_seed_inventory_pass_through_host_vars` to the variable to use in Kolla Ansible. If a variable name is not in this mapping the kayobe name is used. The default is:

```
kolla_seed_inventory_pass_through_host_vars_map:
  kolla_api_interface: "api_interface"
  kolla_bifrost_network_interface: "bifrost_network_interface"
```

It is possible to extend this dict via `kolla_seed_inventory_pass_through_host_vars_map_extra`.

**kolla\_overcloud\_inventory\_pass\_through\_host\_vars**

List of names of host variables to pass through from Kayobe hosts to Kolla Ansible hosts, if set. See also `kolla_overcloud_inventory_pass_through_host_vars_map`. The default is:

```
kolla_overcloud_inventory_pass_through_host_vars:
- "ansible_host"
- "ansible_port"
- "ansible_ssh_private_key_file"
- "kolla_network_interface"
- "kolla_api_interface"
- "kolla_storage_interface"
- "kolla_cluster_interface"
- "kolla_swift_storage_interface"
- "kolla_swift_replication_interface"
- "kolla_provision_interface"
- "kolla_inspector_dnsmasq_interface"
- "kolla_dns_interface"
- "kolla_tunnel_interface"
- "kolla_external_vip_interface"
- "kolla_neutron_external_interfaces"
- "kolla_neutron_bridge_names"
- "kolla_neutron_physical_networks"
```

It is possible to extend this list via `kolla_overcloud_inventory_pass_through_host_vars_extra`.

**kolla\_overcloud\_inventory\_pass\_through\_host\_vars\_map**

Dict mapping names of variables in `kolla_overcloud_inventory_pass_through_host_vars` to the variable to use in Kolla Ansible. If a variable name is not in this mapping the Kayobe name is used. The default is:

```
kolla_overcloud_inventory_pass_through_host_vars_map:
  kolla_network_interface: "network_interface"
  kolla_api_interface: "api_interface"
  kolla_storage_interface: "storage_interface"
  kolla_cluster_interface: "cluster_interface"
  kolla_swift_storage_interface: "swift_storage_interface"
  kolla_swift_replication_interface: "swift_replication_interface"
  kolla_provision_interface: "provision_interface"
  kolla_inspector_dnsmasq_interface: "ironic_dnsmasq_interface"
  kolla_dns_interface: "dns_interface"
  kolla_tunnel_interface: "tunnel_interface"
```

(continues on next page)

(continued from previous page)

```
kolla_neutron_external_interfaces: "neutron_external_interface"
kolla_neutron_bridge_names: "neutron_bridge_name"
kolla_neutron_physical_networks: "neutron_physical_networks"
```

It is possible to extend this dict via `kolla_overcloud_inventory_pass_through_host_vars_map_extra`.

### Example: pass through an additional host variable

In this example we pass through a variable named `my_kayobe_var` from Kayobe to Kolla Ansible.

Listing 130: `$KAYOBE_CONFIG_PATH/kolla.yml`

```
kolla_overcloud_inventory_pass_through_host_vars_extra:
- my_kayobe_var
```

This variable might be defined in the Kayobe inventory, e.g.

Listing 131: `$KAYOBE_CONFIG_PATH/inventory/host_vars/controller01`

```
my_kayobe_var: foo
```

The variable may then be referenced in `$KAYOBE_CONFIG_PATH/kolla/globals.yml`, Kolla Ansible group variables, or in Kolla Ansible custom service configuration.

In case the variable requires a different name in Kolla Ansible, use `kolla_overcloud_inventory_pass_through_host_vars_map_extra`:

Listing 132: `$KAYOBE_CONFIG_PATH/kolla.yml`

```
kolla_overcloud_inventory_pass_through_host_vars_map_extra:
  my_kayobe_var: my_kolla_ansible_var
```

## Custom Kolla Inventory

When running Kolla Ansible playbooks, kayobe will check for any customised inventories in the following locations:

- `${KAYOBE_CONFIG_PATH}/kolla/inventory/`
- `${KAYOBE_CONFIG_PATH}/environments/<environment>/kolla/inventory/`
  - Only used with the *multiple environments feature*

These are copied when kayobe generates the Kolla Ansible configuration. The copy is passed to Ansible as an additional inventory when running any Kolla Ansible playbooks. No templating or additional preprocessing is performed. For this reason, this directory must be a valid Ansible inventory, with the exception that `*.j2` files are ignored to keep compatibility with *custom Kolla Ansible inventory templates*.

Group variables can be used to set configuration for all hosts in a group. They can be set in Kolla Ansible by placing files in `${KAYOBE_CONFIG_PATH}/kolla/inventory/group_vars/*`. Since this directory is copied directly into the Kolla Ansible inventory, Kolla Ansible group names should be used. It should be noted that `extra-vars` and `host_vars` take precedence over `group_vars`. For more information on variable precedence see the Ansible [documentation](#).

### Example: configure a Nova cell

In Kolla Ansible, Nova cells are configured via group variables. For example, to configure cell0001 the following file could be created:

Listing 133: \$KAYOBE\_CONFIG\_PATH/kolla/inventory/  
group\_vars/cell0001/all

```
---
nova_cell_name: cell0001
nova_cell_novncproxy_group: cell0001-vnc
nova_cell_conductor_group: cell0001-control
nova_cell_compute_group: cell0001-compute
```

### Passwords

Kolla Ansible auto-generates passwords to a file, `passwords.yml`. Kayobe handles the orchestration of this, as well as encryption of the file using an Ansible Vault password specified in the `KAYOBE_VAULT_PASSWORD` environment variable, if present. The file is generated to `$KAYOBE_CONFIG_PATH/kolla/passwords.yml`, and should be stored along with other Kayobe configuration files. This file should not be manually modified.

### Configuring Custom Passwords

The following variables are used to configure custom passwords:

- `kolla_ansible_default_custom_passwords`: Dictionary containing default custom passwords, required by Kolla Ansible. Contains SSH keys authorized by kolla user on Kolla hosts, SSH keys authorized in hosts deployed by Bifrost, Docker Registry password and compute libVirt custom passwords.
- `kolla_ansible_extra_custom_passwords`: Dictionary containing extra custom passwords to add or override in the Kolla passwords file. Default is an empty dictionary.
- `kolla_ansible_custom_passwords`: Dictionary containing custom passwords to add or override in the Kolla passwords file. Default is the combination of the `kolla_ansible_default_custom_passwords` and `kolla_ansible_extra_custom_passwords`.

In this example we add our own `my_custom_password` and override `keystone_admin_password`:

Listing 134: \$KAYOBE\_CONFIG\_PATH/kolla.yml

```
---
# Dictionary containing extra custom passwords to add or override in the
# Kolla passwords file.
kolla_ansible_extra_custom_passwords:
  my_custom_password: 'correcthorsebatterystaple'
  keystone_admin_password: 'superduperstrongpassword'
```

## Control Plane Services

Kolla Ansible provides a flexible mechanism for configuring the services that it deploys. Kayobe adds some commonly required configuration options to the defaults provided by Kolla Ansible, but also allows for the free-form configuration supported by Kolla Ansible. The [Kolla Ansible documentation](#) should be used as a reference.

## Enabling Services

Services deployed by Kolla Ansible are enabled via flags.

### **kolla\_enable\_<service or feature>**

There are various flags that can be used to enable features. These map to variables named `enable_<service or feature>` in Kolla Ansible. The default set of enabled services and features is the same as in Kolla ansible, except that Ironi is enabled by default in Kayobe.

### Example: enabling a service

A common task is enabling a new OpenStack service. This may be done via the `kolla_enable_*` flags, for example:

Listing 135: \$KAYOBE\_CONFIG\_PATH/kolla.yml

```
---
kolla_enable_swift: true
```

Note that in some cases additional configuration may be required to successfully deploy a service - check the [Kolla Ansible configuration reference](#).

## Service Configuration

Kolla-ansible's flexible configuration is described in the [Kolla Ansible service configuration documentation](#). We won't duplicate that here, but essentially it involves creating files under a directory which for users of kayobe will be `$KOLLA_CONFIG_PATH/config`. In kayobe, files in this directory are auto-generated and managed by kayobe. Instead, users should create files under `$KAYOBE_CONFIG_PATH/kolla/config` with the same directory structure. These files will be templated using Jinja2, merged with kayobe's own configuration, and written out to `$KOLLA_CONFIG_PATH/config`.

The following files, if present, will be templated and provided to Kolla Ansible. All paths are relative to `$KAYOBE_CONFIG_PATH/kolla/config`. Note that typically Kolla Ansible does not use the same wildcard patterns, and has a more restricted set of files that it will process. In some cases, it may be necessary to inspect the Kolla Ansible configuration tasks to determine which files are supported.

Table 1: Kolla-ansible configuration files

File	Purpose
aodh.conf	Aodh configuration.
aodh/*	Extended Aodh configuration.
backup.my.cnf	Mariabackup configuration.
barbican.conf	Barbican configuration.
barbican/*	Extended Barbican configuration.
blazar.conf	Blazar configuration.
blazar/*	Extended Blazar configuration.
ceilometer.conf	Ceilometer configuration.
ceilometer/*	Extended Ceilometer configuration.
cinder.conf	Cinder configuration.
cinder/*	Extended Cinder configuration.
cloudkitty.conf	CloudKitty configuration.
cloudkitty/*	Extended CloudKitty configuration.
designate.conf	Designate configuration.
designate/*	Extended Designate configuration.
fluentd/filter	Fluentd filter configuration.
fluentd/input	Fluentd input configuration.
fluentd/output	Fluentd output configuration.
galera.cnf	MariaDB configuration.
glance.conf	Glance configuration.
glance/*	Extended Glance configuration.
global.conf	Global configuration for all OpenStack services.
gnocchi.conf	Gnocchi configuration.
gnocchi/*	Extended Gnocchi configuration.
grafana.ini	Grafana configuration.
grafana/*	Extended Grafana configuration.
haproxy/*	Main HAProxy configuration.
haproxy-config/*	Modular HAProxy configuration.
heat.conf	Heat configuration.
heat/*	Extended heat configuration.
horizon/*	Extended horizon configuration.
influx*	InfluxDB configuration.
ironic-inspector.conf	Ironic inspector configuration.
ironic-inspector/*	Extended Ironic inspector configuration
ironic.conf	Ironic configuration.
ironic/*	Extended ironic configuration.
keepalived/*	Extended keepalived configuration.
keystone.conf	Keystone configuration.
keystone/*	Extended keystone configuration.
magnum.conf	Magnum configuration.
magnum/*	Extended magnum configuration.
manila.conf	Manila configuration.
manila/*	Extended manila configuration.
mariadb/*	Extended MariaDB configuration.
masakari.conf	Masakari configuration.
masakari/*	Extended masakari configuration.
multipath.conf	Multipathd configuration.

continues on next page

Table 1 – continued from previous page

File	Purpose
neutron.conf	Neutron configuration.
neutron/ml2_conf.ini	Neutron ML2 configuration.
neutron/*	Extended neutron configuration.
nova.conf	Nova configuration.
nova/*	Extended nova configuration.
octavia.conf	Octavia configuration.
octavia/*	Extended Octavia configuration.
opensearch/*	OpenSearch configuration.
placement.conf	Placement configuration.
placement/*	Extended Placement configuration.
prometheus/*	Prometheus configuration.
swift/*	Extended swift configuration.
telegraf/*	Extended Telegraf configuration.

## Configuring an OpenStack Component

To provide custom configuration to be applied to all glance services, create `$KAYOBE_CONFIG_PATH/kolla/config/glance.conf`. For example:

Listing 136: `$KAYOBE_CONFIG_PATH/kolla/config/glance.conf`

```
[DEFAULT]
api_limit_max = 500
```

## Configuring an OpenStack Service

To provide custom configuration for the glance API service, create `$KAYOBE_CONFIG_PATH/kolla/config/glance/glance-api.conf`. For example:

Listing 137: `$KAYOBE_CONFIG_PATH/kolla/config/glance/glance-api.conf`

```
[DEFAULT]
api_limit_max = 500
```

## Bifrost

This section covers configuration of the Bifrost service that runs on the seed host. Bifrost configuration is typically applied in `${KAYOBE_CONFIG_PATH}/bifrost.yml`. Consult the [Bifrost documentation](#) for further details of Bifrost usage and configuration.

## Bifrost installation

### Note

This section may be skipped if using an upstream Bifrost container image.

The following options are used if building the Bifrost container image locally.

**kolla\_bifrost\_source\_url**

URL of Bifrost source code repository. Default is <https://opendev.org/openstack/bifrost>.

**kolla\_bifrost\_source\_version**

Version (branch, tag, etc.) of Bifrost source code repository. Default is `{{ openstack_branch }}`, which is the same as the Kayobe upstream branch name.

For example, to install Bifrost from a custom git repository:

Listing 138: bifrost.yml

```
kolla_bifrost_source_url: https://git.example.com/bifrost
kolla_bifrost_source_version: downstream
```

## Bifrost interface configuration

Following option allows to configure ipv4 interface MAC for the provisioned server in cases where the default (PXE interface MAC) is not a suitable solution for admin network (e.g. separate interfaces for provisioning and admin):

Listing 139: bifrost.yml

```
kolla_bifrost_use_introspection_mac: true
```

It will cause the `overcloud provision` command to query Bifrost's Introspection data for MAC address of the interface that is bound to admin network. Limitation of that option is that Kayobe will use the first physical NIC if the interface is bond or bridge.

Alternatively you can set following in `host_vars` of a specific host:

Listing 140: host\_vars

```
kolla_bifrost_ipv4_interface_mac: "<mac_address_goes_here>"
```

## Overcloud root disk image configuration

### Note

This configuration only applies when `overcloud_dib_build_host_images` (set in `${KAYOBE_CONFIG_PATH}/overcloud-dib.yml`) is changed to false.

Bifrost uses Diskimage builder (DIB) to build a root disk image that is deployed to overcloud hosts when they are provisioned. The following options configure how this image is built. Consult the [Diskimage-builder documentation](#) for further information on building disk images.

The default configuration builds a whole disk (partitioned) image using the selected *OS distribution* with serial console enabled, and SELinux disabled if CentOS Stream is used. Rocky Linux 9 users should use the default method of building images with *Diskimage builder directly*.

**kolla\_bifrost\_dib\_os\_element**

DIB base OS element. Default is `{{ os_distribution }}`.

**kolla\_bifrost\_dib\_os\_release**

DIB image OS release. Default is `{{ os_release }}`.

**kolla\_bifrost\_dib\_elements\_default**

*Added in the Train release. Use `kolla_bifrost_dib_elements` in earlier releases.*

List of default DIB elements. Default is `["enable-serial-console", "vm"]`. The `vm` element is poorly named, and causes DIB to build a whole disk image rather than a single partition.

**kolla\_bifrost\_dib\_elements\_extra**

*Added in the Train release. Use `kolla_bifrost_dib_elements` in earlier releases.*

List of additional DIB elements. Default is none.

**kolla\_bifrost\_dib\_elements**

List of DIB elements. Default is a combination of `kolla_bifrost_dib_elements_default` and `kolla_bifrost_dib_elements_extra`.

**kolla\_bifrost\_dib\_init\_element**

DIB init element. Default is `cloud-init-datasources`.

**kolla\_bifrost\_dib\_env\_vars\_default**

*Added in the Train release. Use `kolla_bifrost_dib_env_vars` in earlier releases.*

DIB default environment variables. Default is `{DIB_BOOTLOADER_DEFAULT_CMDLINE: "nofb nomodeset gfxpayload=text net.ifnames=1", "DIB_CLOUD_INIT_DATASOURCES": "ConfigDrive"}`.

**kolla\_bifrost\_dib\_env\_vars\_extra**

*Added in the Train release. Use `kolla_bifrost_dib_env_vars` in earlier releases.*

DIB additional environment variables. Default is none.

**kolla\_bifrost\_dib\_env\_vars**

DIB environment variables. Default is combination of `kolla_bifrost_dib_env_vars_default` and `kolla_bifrost_dib_env_vars_extra`.

**kolla\_bifrost\_dib\_packages**

List of DIB packages to install. Default is to install no extra packages.

The disk image is built during the deployment of seed services. It is worth noting that currently, the image will not be rebuilt if it already exists. To force rebuilding the image, it is necessary to remove the file. On the seed:

**Note**

Example shows the commands when using Docker as the container engine. If using Podman, simply change `docker` for `sudo podman` in the command.

```
docker exec bifrost_deploy rm /httpboot/deployment_image.qcow2
```

Then on the control host:

```
(kayobe) $ kayobe seed service deploy
```

### Example: Adding an element

In the following, we extend the list of DIB elements to add the `growpart` element:

Listing 141: `bifrost.yml`

```
kolla_bifrost_dib_elements_extra:  
  - "growpart"
```

### Example: Building an XFS root filesystem image

By default, DIB will format the image as `ext4`. In some cases it might be useful to use XFS, for example when using the `overlay` Docker storage driver which can reach the maximum number of hardlinks allowed by `ext4`.

In DIB, we achieve this by setting the `FS_TYPE` environment variable to `xfs`.

Listing 142: `bifrost.yml`

```
kolla_bifrost_dib_env_vars_extra:  
  FS_TYPE: "xfs"
```

### Example: Configuring a development user account

#### Warning

A development user account should not be used in production.

When debugging a failed deployment, it can sometimes be necessary to allow access to the image via a preconfigured user account with a known password. This can be achieved via the `devuser` element.

This example shows how to add the `devuser` element, and configure a username and password for an account that has passwordless `sudo`:

Listing 143: bifrost.yml

```
kolla_bifrost_dib_elements_extra:
- "devuser"

kolla_bifrost_dib_env_vars_extra:
  DIB_DEV_USER_USERNAME: "devuser"
  DIB_DEV_USER_PASSWORD: "correct horse battery staple"
  DIB_DEV_USER_PWDLESS_SUDO: "yes"
```

Alternatively, the `dynamic-login` element can be used to authorize SSH keys by appending them to the kernel arguments.

### Example: Installing a package

It can be necessary to install additional packages in the root disk image. Rather than needing to write a custom DIB element, we can use the `kolla_bifrost_dib_packages` variable. For example, to install the `biosdevname` package:

Listing 144: bifrost.yml

```
kolla_bifrost_dib_packages:
- "biosdevname"
```

### Disk image deployment configuration

The name of the root disk image to deploy can be configured via the `kolla_bifrost_deploy_image_filename` option, which defaults to `deployment_image.qcow2`. It can be defined globally in `${KAYOBE_CONFIG_PATH}/bifrost.yml`, or defined per-group or per-host in the Kayobe inventory. This can be used to provision different images across the overcloud.

It can be necessary to deploy overcloud hosts with custom settings which can be configured during provision by the cloud-init user-data configured via the `kolla_bifrost_deploy_image_user_data_content` option. The defaults is an empty string.

Listing 145: bifrost.yml

```
kolla_bifrost_deploy_image_user_data_content: |
  users:
    name: myuser
    sudo: ALL=(ALL) NOPASSWD:ALL
    shell: /bin/bash
    passwd: <HASH_OF_MY_PASSWORD>
    lock_passwd: false

  timezone: "Europe/Paris"
```

While only a single disk image can be built with Bifrost, starting from the Yoga 12.0.0 release, Kayobe supports building multiple disk images directly through Diskimage builder. Consult the [overcloud host disk image build documentation](#) for more details.

## **Ironi configuration**

The following options configure the Ironi service in the `bifrost-deploy` container.

### **kolla\_bifrost\_enabled\_hardware\_types**

List of [hardware types](#) to enable for Bifrosts Ironi. Default is `["ipmi"]`.

### **kolla\_bifrost\_extra\_kernel\_options**

List of [extra kernel parameters](#) for Bifrosts Ironi PXE configuration. Default is none.

## **Ironi Inspector configuration**

The following options configure the Ironi Inspector service in the `bifrost-deploy` container.

### **kolla\_bifrost\_inspector\_processing\_hooks**

List of of inspector processing plugins. Default is `{{ inspector_processing_hooks }}`, defined in `${KAYOBE_CONFIG_PATH}/inspector.yml`.

### **kolla\_bifrost\_inspector\_port\_addition**

Which MAC addresses to add as ports during introspection. One of `all`, `active` or `pxe`. Default is `{{ inspector_add_ports }}`, defined in `${KAYOBE_CONFIG_PATH}/inspector.yml`.

### **kolla\_bifrost\_inspector\_extra\_kernel\_options**

List of extra kernel parameters for the inspector default PXE configuration. Default is `{{ inspector_extra_kernel_options }}`, defined in `${KAYOBE_CONFIG_PATH}/inspector.yml`. When customising this variable, the default extra kernel parameters should be kept to retain full node inspection capabilities.

### **kolla\_bifrost\_inspector\_rules**

List of introspection rules for Bifrosts Ironi Inspector service. Default is `{{ inspector_rules }}`, defined in `${KAYOBE_CONFIG_PATH}/inspector.yml`.

### **kolla\_bifrost\_inspector\_ipmi\_username**

Ironi inspector IPMI username to set via an introspection rule. Default is `{{ ipmi_username }}`, defined in `${KAYOBE_CONFIG_PATH}/bmc.yml`.

### **kolla\_bifrost\_inspector\_ipmi\_password**

Ironi inspector IPMI password to set via an introspection rule. Default is `{{ ipmi_password }}`, defined in `${KAYOBE_CONFIG_PATH}/bmc.yml`.

### **kolla\_bifrost\_inspector\_lldp\_switch\_port\_interface**

Ironi inspector network interface name on which to check for an LLDP switch port description to use as the nodes name. Default is `{{ inspector_lldp_switch_port_interface_default }}`, defined in `${KAYOBE_CONFIG_PATH}/inspector.yml`.

### **kolla\_bifrost\_inspector\_deploy\_kernel**

Ironi inspector deployment kernel location. Default is `http://{{ provision_oc_net_name | net_ip }}:8080/ipa.kernel`.

### **kolla\_bifrost\_inspector\_deploy\_ramdisk**

Ironi inspector deployment ramdisk location. Default is `http://{{ provision_oc_net_name | net_ip }}:8080/ipa.initramfs`.

### **kolla\_bifrost\_inspection\_timeout**

Timeout of hardware inspection on overcloud nodes, in seconds. Default is `{{ inspector_inspection_timeout }}`, defined in `${KAYOBE_CONFIG_PATH}/inspector.yml`.

**kolla\_bifrost\_inspector\_redfish\_username**

Ironic inspector Redfish username to set via an introspection rule. Defined in `${KAYOBE_CONFIG_PATH}/bifrost.yml`. Default is `{{ inspector_redfish_username }}`.

**kolla\_bifrost\_inspector\_redfish\_password**

Ironic inspector Redfish password to set via an introspection rule. Defined in `${KAYOBE_CONFIG_PATH}/bifrost.yml`. Default is `{{ inspector_redfish_password }}`.

**Ironic Python Agent (IPA) configuration****Note**

If building IPA images locally (`ipa_build_images` is `true`) this section can be skipped.

The following options configure the source of Ironic Python Agent images used by Bifrost for inspection and deployment. Consult the [Ironic Python Agent documentation](#) for full details.

**kolla\_bifrost\_ipa\_kernel\_upstream\_url**

URL of Ironic Python Agent (IPA) kernel image. Default is `{{ inspector_ipa_kernel_upstream_url }}`, defined in `${KAYOBE_CONFIG_PATH}/inspector.yml`.

**kolla\_bifrost\_ipa\_kernel\_checksum\_url**

URL of checksum of Ironic Python Agent (IPA) kernel image. Default is `{{ inspector_ipa_kernel_checksum_url }}`, defined in `${KAYOBE_CONFIG_PATH}/inspector.yml`.

**kolla\_bifrost\_ipa\_kernel\_checksum\_algorithm**

Algorithm of checksum of Ironic Python Agent (IPA) kernel image. Default is `{{ inspector_ipa_kernel_checksum_algorithm }}`, defined in `${KAYOBE_CONFIG_PATH}/inspector.yml`.

**kolla\_bifrost\_ipa\_ramdisk\_upstream\_url**

URL of Ironic Python Agent (IPA) ramdisk image. Default is `{{ inspector_ipa_ramdisk_upstream_url }}`, defined in `${KAYOBE_CONFIG_PATH}/inspector.yml`.

**kolla\_bifrost\_ipa\_ramdisk\_checksum\_url**

URL of checksum of Ironic Python Agent (IPA) ramdisk image. Default is `{{ inspector_ipa_ramdisk_checksum_url }}`, defined in `${KAYOBE_CONFIG_PATH}/inspector.yml`.

**kolla\_bifrost\_ipa\_ramdisk\_checksum\_algorithm**

Algorithm of checksum of Ironic Python Agent (IPA) ramdisk image. Default is `{{ inspector_ipa_ramdisk_checksum_algorithm }}`, defined in `${KAYOBE_CONFIG_PATH}/inspector.yml`.

## Inventory configuration

### Note

This feature is currently not well tested. It is advisable to use autodiscovery of overcloud servers instead.

The following option is used to configure a static inventory of servers for Bifrost.

**kolla\_bifrost\_servers**

Server inventory for Bifrost in the [JSON file format](#).

## Custom Configuration

Further configuration of arbitrary Ansible variables for Bifrost can be provided via the following files:

- `${KAYOBE_CONFIG_PATH}/kolla/config/bifrost/bifrost.yml`
- `${KAYOBE_CONFIG_PATH}/kolla/config/bifrost/dib.yml`

These are both passed as extra variables files to `ansible-playbook`, but the naming scheme provides a separation of DIB image related variables from other variables. It may be necessary to inspect the [Bifrost source code](#) for the full set of variables that may be configured.

For example, to configure debug logging for Ironic Inspector:

Listing 146: `kolla/config/bifrost/bifrost.yml`

```
inspector_debug: true
```

## Overcloud host disk image build

This section covers configuration for building overcloud host disk images with Diskimage builder (DIB), which is available from the Yoga 12.0.0 release. This configuration is applied in `${KAYOBE_CONFIG_PATH}/overcloud-dib.yml`.

### Enabling host disk image build

From the Yoga release, disk images for overcloud hosts can be built directly using Diskimage builder rather than through Bifrost. This is enabled with the following option:

#### **overcloud\_dib\_build\_host\_images**

Whether to build host disk images with DIB directly instead of through Bifrost. Setting it to true disables Bifrost image build and allows images to be built with the `kayobe overcloud host image build` command. Default value is true since the Zed release.

With this option enabled, Bifrost will be configured to stop building a root disk image. This will become the default behaviour in a future release.

## Overcloud root disk image configuration

Kayobe uses Diskimage builder (DIB) to build root disk images that are deployed to overcloud hosts when they are provisioned. The following options configure how these images are built. Consult the [Diskimage-builder documentation](#) for further information on building disk images.

The default configuration builds a whole disk (partitioned) image using the selected *OS distribution* (Rocky Linux 9 by default) with serial console enabled, and SELinux disabled if CentOS Stream or Rocky Linux is used. *Cloud-init* is used to process the configuration drive built by Bifrost during provisioning.

### **overcloud\_dib\_host\_packages\_extra**

List of additional host packages to install. Default is an empty list.

### **overcloud\_dib\_host\_images**

List of overcloud host disk images to build. Each element is a dict defining an image in a format accepted by the [stackhpc.openstack.os\\_images](#) role. Default is to build an image named `deployment_image` configured with the `overcloud_dib_*` variables defined below: `{"name": "deployment_image", "elements": "{{ overcloud_dib_elements }}", "env": "{{ overcloud_dib_env_vars }}", "packages": "{{ overcloud_dib_packages }}"}`.

### **overcloud\_dib\_os\_element**

DIB base OS element. Default is `{{ 'rocky-container' if os_distribution == 'rocky' else os_distribution }}`.

### **overcloud\_dib\_os\_release**

DIB image OS release. Default is `{{ os_release }}`.

### **overcloud\_dib\_elements\_default**

List of default DIB elements. Default is `[ "{{ overcloud_dib_os_element }}", "cloud-init-datasources", "enable-serial-console", "vm" ]`. The `vm` element is poorly named, and causes DIB to build a whole disk image rather than a single partition.

### **overcloud\_dib\_elements\_extra**

List of additional DIB elements. Default is none.

### **overcloud\_dib\_elements**

List of DIB elements. Default is a combination of `overcloud_dib_elements_default` and `overcloud_dib_elements_extra`.

### **overcloud\_dib\_env\_vars\_default**

DIB default environment variables. Default is `{"DIB_BOOTLOADER_DEFAULT_CMDLINE": "nofb nomodeset gfxpayload=text net.ifnames=1", "DIB_CLOUD_INIT_DATASOURCES": "ConfigDrive", "DIB_CONTAINERFILE_RUNTIME": "docker", "DIB_CONTAINERFILE_NETWORK_DRIVER": "host", "DIB_RELEASE": "{{ overcloud_dib_os_release }}"}`.

### **overcloud\_dib\_env\_vars\_extra**

DIB additional environment variables. Default is none.

### **overcloud\_dib\_env\_vars**

DIB environment variables. Default is combination of `overcloud_dib_env_vars_default` and `overcloud_dib_env_vars_extra`.

### **overcloud\_dib\_packages**

List of DIB packages to install. Default is to install no extra packages.

**overcloud\_dib\_git\_elements\_default**

List of default git repositories containing Diskimage Builder (DIB) elements. See `stackhpc.openstack.os_images` role for usage. Default is empty.

**overcloud\_dib\_git\_elements\_extra**

List of additional git repositories containing Diskimage Builder (DIB) elements. See `stackhpc.openstack.os_imagesimages` role for usage. Default is empty.

**overcloud\_dib\_git\_elements**

List of git repositories containing Diskimage Builder (DIB) elements. See `stackhpc.openstack.os_images` role for usage. Default is a combination of `overcloud_dib_git_elements_default` and `overcloud_dib_git_elements_extra`.

**overcloud\_dib\_upper\_constraints\_file**

Upper constraints file for installing packages in the virtual environment used for building overcloud host disk images. Default is `{{ pip_upper_constraints_file }}`.

**overcloud\_dib\_dib\_upper\_constraints\_file**

Upper constraints file for installation of DIB to build overcloud host disk images. Default is empty string.

Disk images are built with the following command:

```
(kayobe) $ kayobe overcloud host image build
```

It is worth noting that images will not be rebuilt if they already exist. To force rebuilding images, it is necessary to use the `--force-rebuild` argument.

```
(kayobe) $ kayobe overcloud host image build --force-rebuild
```

**Example: Adding an element**

In the following, we extend the list of DIB elements to add the `growpart` element:

Listing 147: `dib.yml`

```
overcloud_dib_elements_extra:
- "growpart"
```

**Example: Building an XFS root filesystem image**

By default, DIB will format the image as `ext4`. In some cases it might be useful to use XFS, for example when using the `overlay` Docker storage driver which can reach the maximum number of hardlinks allowed by `ext4`.

In DIB, we achieve this by setting the `FS_TYPE` environment variable to `xfs`.

Listing 148: dib.yml

```
overcloud_dib_env_vars_extra:  
  FS_TYPE: "xfs"
```

### Example: Configuring a development user account

#### Warning

A development user account should not be used in production.

When debugging a failed deployment, it can sometimes be necessary to allow access to the image via a preconfigured user account with a known password. This can be achieved via the `devuser` element.

This example shows how to add the `devuser` element, and configure a username and password for an account that has passwordless sudo:

Listing 149: dib.yml

```
overcloud_dib_elements_extra:  
  - "devuser"  
  
overcloud_dib_env_vars_extra:  
  DIB_DEV_USER_USERNAME: "devuser"  
  DIB_DEV_USER_PASSWORD: "correct horse battery staple"  
  DIB_DEV_USER_PWDLESS_SUDO: "yes"
```

Alternatively, the `dynamic-login` element can be used to authorize SSH keys by appending them to the kernel arguments.

### Example: Configuring custom DIB elements

Sometimes it is useful to use custom DIB elements that are not shipped with DIB itself. This can be done by sharing them in a git repository.

Listing 150: overcloud-dib.yml

```
overcloud_dib_elements_extra:  
  - "my-element"  
  
overcloud_dib_git_elements:  
  repo: "https://git.example.com/custom-dib-elements"  
  local: "{{ source_checkout_path }}/custom-dib-elements"  
  version: "master"  
  elements_path: "elements"
```

In this example the `master` branch of `https://git.example.com/custom-dib-elements` would have a top level `elements` directory, containing a `my-element` directory for the element.

### Example: Installing a package

It can be necessary to install additional packages in the root disk image. Rather than needing to write a custom DIB element, we can use the `overcloud_dib_packages` variable. For example, to install the `biosdevname` package:

Listing 151: `dib.yml`

```
overcloud_dib_packages:
- "biosdevname"
```

### Example: Building multiple images

It can be necessary to build multiple images to support the various types of hardware present in a deployment or the different functions performed by overcloud hosts. This can be configured with the `overcloud_dib_host_images` variable, using a format accepted by the `stackhpc.openstack.os_images` role. Note that image names should not include the file extension. For example, to build a second image with a development user account and the `biosdevname` package:

Listing 152: `dib.yml`

```
overcloud_dib_host_images:
- name: "deployment_image"
  elements: "{{ overcloud_dib_elements }}"
  env: "{{ overcloud_dib_env_vars }}"
  packages: "{{ overcloud_dib_packages }}"
- name: "debug_deployment_image"
  elements: "{{ overcloud_dib_elements + ['devuser'] }}"
  env: "{{ overcloud_dib_env_vars | combine(devuser_env_vars) }}"
  packages: "{{ overcloud_dib_packages + ['biosdevname'] }}"

devuser_env_vars:
  DIB_DEV_USER_USERNAME: "devuser"
  DIB_DEV_USER_PASSWORD: "correct horse battery staple"
  DIB_DEV_USER_PWDLESS_SUDO: "yes"
```

Running the `kayobe overcloud host image build` command with this configuration will create two images: `deployment_image.qcow2` and `debug_deployment_image.qcow2`.

### Disk image deployment configuration

See *disk image deployment configuration in Bifrost* for how to configure the root disk image to be used to provision each host.

### IroniC Python Agent (IPA)

This section covers configuration of IroniC Python Agent (IPA) which is used by IroniC and IroniC Inspector to deploy and inspect bare metal nodes. This is used by the Bifrost services that run on the seed host, and also by IroniC and IroniC Inspector services running in the overcloud for bare metal compute, if enabled (`kolla_enable_ironic` is `true`). IPA configuration is typically applied in `/${KAYOBE_CONFIG_PATH}/ipa.yml`. Consult the [IPA documentation](#) for full details of IPA usage and configuration.

## IroniC Python Agent (IPA) image build configuration

### Note

This section may be skipped if not building IPA images locally (`ipa_build_images` is false).

The following options cover building of IPA images via Diskimage-builder (DIB). Consult the [Diskimage-builder documentation](#) for full details.

The default configuration builds a CentOS Stream 9 ramdisk image which includes the upstream IPA source code, and has a serial console enabled.

The images are built for Bifrost via `kayobe seed deployment image build`, and for IroniC in the overcloud (if enabled) via `kayobe overcloud deployment image build`.

### `ipa_build_images`

Whether to build IPA images from source. Default is False.

### `ipa_build_source_url`

URL of IPA source repository. Default is <https://opendev.org/openstack/ironic-python-agent>

### `ipa_build_source_version`

Version of IPA source repository. Default is `{{ openstack_branch }}`.

### `ipa_builder_source_url`

URL of IPA builder source repository. Default is <https://opendev.org/openstack/ironic-python-agent-builder>

### `ipa_builder_source_version`

Version of IPA builder source repository. Default is master.

### `ipa_build_dib_host_packages_extra`

List of additional build host packages to install. Default is an empty list.

### `ipa_build_dib_elements_default`

List of default Diskimage Builder (DIB) elements to use when building IPA images. Default is `["centos", "dynamic-login", "enable-serial-console", "ironic-python-agent-ramdisk"]` when `os_distribution` is "rocky", and `["ubuntu", "dynamic-login", "enable-serial-console", "ironic-python-agent-ramdisk"]` otherwise.

### `ipa_build_dib_elements_extra`

List of additional Diskimage Builder (DIB) elements to use when building IPA images. Default is empty.

### `ipa_build_dib_elements`

List of Diskimage Builder (DIB) elements to use when building IPA images. Default is combination of `ipa_build_dib_elements_default` and `ipa_build_dib_elements_extra`.

### `ipa_build_dib_env_default`

Dictionary of default environment variables to provide to Diskimage Builder (DIB) during IPA image build. Default is `{"DIB_RELEASE": "9-stream", "DIB_REPOLOCATION_ironic_python_agent": "{{ ipa_build_source_url }}", "DIB_REPOREF_ironic_python_agent": "{{ ipa_build_source_version }}", "DIB_REPOREF_requirements": "{{ ipa_build_source_version }}"}` if `os_distribution` is "rocky" else `{"DIB_RELEASE": "{{ os_release }}"}`,

```
"DIB_REPOLOCATION_ironic_python_agent": "{{ ipa_build_source_url }}",
"DIB_REPOREF_ironic_python_agent": "{{ ipa_build_source_version }}",
"DIB_REPOREF_requirements": "{{ ipa_build_source_version }}"}
```

**ipa\_build\_dib\_env\_extra**

Dictionary of additional environment variables to provide to Diskimage Builder (DIB) during IPA image build. Default is empty.

**ipa\_build\_dib\_env**

Dictionary of environment variables to provide to Diskimage Builder (DIB) during IPA image build. Default is a combination of `ipa_build_dib_env_default` and `ipa_build_dib_env_extra`.

**ipa\_build\_dib\_git\_elements\_default**

List of default git repositories containing Diskimage Builder (DIB) elements. See [stackhpc.openstack.os\\_images](#) role for usage. Default is one item for IPA builder.

**ipa\_build\_dib\_git\_elements\_extra**

List of additional git repositories containing Diskimage Builder (DIB) elements. See [stackhpc.openstack.os\\_images](#) role for usage. Default is none.

**ipa\_build\_dib\_git\_elements**

List of git repositories containing Diskimage Builder (DIB) elements. See [stackhpc.openstack.os\\_images](#) role for usage. Default is combination of `ipa_build_dib_git_elements_default` and `ipa_build_dib_git_elements_extra`.

**ipa\_build\_dib\_packages**

List of DIB packages to install. Default is none.

**ipa\_build\_upper\_constraints\_file**

Upper constraints file for installing packages in the virtual environment used for building IPA images. Default is `{{ pip_upper_constraints_file }}`.

**Example: Building IPA images locally**

To build IPA images locally:

Listing 153: ipa.yml

```
ipa_build_images: true
```

**Example: Installing IPA from a custom git repository**

To install IPA from a custom git repository:

Listing 154: ipa.yml

```
ipa_source_url: https://git.example.com/ironic-python-agent
ipa_source_version: downstream
```

### Example: Adding an element

In the following example, we extend the list of DIB elements to add the `mellanox` element, which can be useful for inspecting hardware with Mellanox InfiniBand NICs.

Listing 155: ipa.yml

```
ipa_build_dib_elements_extra:
  - "mellanox"
```

### Example: Dynamically allowing access to the IPA environment

When debugging a failed deployment, it can sometimes be necessary to allow access to the image dynamically.

The `dynamic-login` element can be used to authorize SSH keys by appending them to the kernel arguments. This element is included by default in IPA images since the Epoxy 18.0.0 release. On previous releases, it can be added with:

Listing 156: ipa.yml

```
ipa_build_dib_elements_extra:
  - "dynamic-login"
```

Bifrost can be configured to use `dynamic-login` with the `kolla_bifrost_extra_kernel_options` variable:

Listing 157: bifrost.yml

```
kolla_bifrost_extra_kernel_options:
  - sshkey="ssh-rsa BBA1..."
```

The updated configuration is applied with `kayobe seed service deploy`.

Overcloud Ironic can be configured with the `kolla_ironic_pxe_append_params_extra` variable:

Listing 158: ironic.yml

```
kolla_ironic_pxe_append_params_extra:
- sshkey="ssh-rsa BBA1..."
```

The updated configuration is applied with `kayobe overcloud service deploy`.

Further information on troubleshooting IPA can be found [here](#).

### Example: Configuring a development user account

#### Warning

A development user account should not be used in production.

When debugging a failed deployment, it can sometimes be necessary to allow access to the image via a preconfigured user account with a known password. This can be achieved via the `devuser` element.

This example shows how to add the `devuser` element, and configure a username and password for an account that has passwordless sudo:

Listing 159: ipa.yml

```
ipa_build_dib_elements_extra:
- "devuser"

ipa_build_dib_env_extra:
  DIB_DEV_USER_USERNAME: "devuser"
  DIB_DEV_USER_PASSWORD: "correct horse battery staple"
  DIB_DEV_USER_PWDLESS_SUDO: "yes"
```

Further information on troubleshooting IPA can be found [here](#).

### Example: Configuring custom DIB elements

Sometimes it is useful to use custom DIB elements that are not shipped with DIB itself. This can be done by sharing them in a git repository.

Listing 160: ipa.yml

```
ipa_build_dib_elements_extra:
- "my-element"

ipa_build_dib_git_elements:
- repo: "https://git.example.com/custom-dib-elements"
  local: "{{ source_checkout_path }}/custom-dib-elements"
  version: "master"
  elements_path: "elements"
```

In this example the `master` branch of <https://git.example.com/custom-dib-elements> would have a top level `elements` directory, containing a `my-element` directory for the element.

### Example: Installing a package

It can be necessary to install additional packages in the IPA image. Rather than needing to write a custom DIB element, we can use the `ipa_build_dib_packages` variable. For example, to install the `biosdevname` package:

Listing 161: `ipa.yml`

```
ipa_build_dib_packages:  
  - "biosdevname"
```

### IroniC Python Agent (IPA) images configuration

#### Note

If building IPA images locally (`ipa_build_images` is `true`) this section can be skipped.

The following options configure the source of IroniC Python Agent images for inspection and deployment. Consult the [IroniC Python Agent documentation](#) for full details.

#### `ipa_images_upstream_url_suffix`

Suffix of upstream IroniC deployment image files. Default is based on `{{ openstack_branch }}`.

#### `ipa_images_kernel_name`

Name of IroniC deployment kernel image to register in Glance. Default is `ipa.kernel`.

#### `ipa_kernel_upstream_url`

URL of IroniC deployment kernel image to download. Default is `https://tarballs.openstack.org/ironic-python-agent/dib/files/ipa-centos9{{ ipa_images_upstream_url_suffix }}.kernel`.

#### `ipa_kernel_checksum_url`

URL of checksum of IroniC deployment kernel image. Default is `{{ ipa_kernel_upstream_url }}.{{ ipa_kernel_checksum_algorithm }}`.

#### `ipa_kernel_checksum_algorithm`

Algorithm of checksum of IroniC deployment kernel image. Default is `sha256`.

#### `ipa_images_ramdisk_name`

Name of IroniC deployment ramdisk image to register in Glance. Default is `ipa.initramfs`.

#### `ipa_ramdisk_upstream_url`

URL of IroniC deployment ramdisk image to download. Default is `https://tarballs.openstack.org/ironic-python-agent/dib/files/ipa-centos9{{ ipa_images_upstream_url_suffix }}.initramfs`.

#### `ipa_ramdisk_checksum_url`

URL of checksum of IroniC deployment ramdisk image. Default is `{{ ipa_ramdisk_upstream_url }}.{{ ipa_ramdisk_checksum_algorithm }}`.

#### `ipa_ramdisk_checksum_algorithm`

Algorithm of checksum of IroniC deployment ramdisk image. Default is `sha256`.

## IroniC Python Agent (IPA) deployment configuration

The following options configure how IPA operates during deployment and inspection.

### **ipa\_collect\_lldp**

Whether to enable collection of LLDP TLVs. Default is True.

### **ipa\_collectors\_default**

#### Note

extra-hardware is not currently included as it requires a ramdisk with the hardware python module installed.

List of default inspection collectors to run. Default is ["default", "logs", "pci-devices"].

### **ipa\_collectors\_extra**

List of additional inspection collectors to run. Default is none.

### **ipa\_collectors**

List of inspection collectors to run. Default is a combination of ipa\_collectors\_default and ipa\_collectors\_extra.

### **ipa\_benchmarks\_default**

List of default inspection benchmarks to run. Default is ["cpu", "disk", "ram"].

### **ipa\_benchmarks\_extra**

List of extra inspection benchmarks to run. Default is none.

### **ipa\_benchmarks**

#### Note

The extra-hardware collector must be enabled in order to execute benchmarks during inspection.

List of inspection benchmarks to run. Default is a combination of ipa\_benchmarks\_default and ipa\_benchmarks\_extra.

### **ipa\_kernel\_options\_default**

List of default kernel parameters for IroniC python agent. Default includes ipa-collect-lldp, ipa-inspection-collectors and ipa-inspection-benchmarks, with arguments taken from ipa\_collect\_lldp, ipa\_collectors and ipa\_benchmarks.

### **ipa\_kernel\_options\_extra**

List of additional kernel parameters for IroniC python agent. Default is none.

### **ipa\_kernel\_options**

List of kernel parameters for IroniC python agent. Default is a combination of ipa\_kernel\_options\_default and ipa\_kernel\_options\_extra.

### Example: Adding the extra-hardware collector

The `extra-hardware` collector may be used to collect additional information about hardware during inspection. It is also a requirement for running benchmarks. This collector depends on the Python `hardware` package, which is not installed in IPA images by default.

The following example enables the `extra-hardware` collector:

Listing 162: `ipa.yml`

```
ipa_collectors_extra:  
  - "extra-hardware"
```

The `ironic-python-agent-builder` repository provides an `extra-hardware` element which may be used to install this package. It may be used as follows if building an IPA image locally:

Listing 163: `ipa.yml`

```
ipa_build_dib_elements_extra:  
  - "extra-hardware"
```

### Example: Passing additional kernel arguments to IPA

The following example shows how to pass additional kernel arguments to IPA:

Listing 164: `ipa.yml`

```
ipa_kernel_options_extra:  
  - "foo=bar"
```

## Docker registry

This section covers configuration of the Docker registry that may be deployed, by default on the seed host. Docker registry configuration is typically applied in `${KAYOBE_CONFIG_PATH}/docker-registry.yml`. Consult the [Docker registry documentation](#) for further details of registry usage and configuration.

The registry is deployed during the `kayobe seed host configure` command.

### Configuring the registry

#### `docker_registry_enabled`

Whether a docker registry is enabled. Default is `false`. When set to `true`, the Docker registry is deployed on all hosts in the `docker-registry` group. By default this includes the seed host.

#### `docker_registry_env`

Dict of environment variables to provide to the docker registry container. This allows to configure the registry by overriding specific configuration options, as described at <https://docs.docker.com/registry/configuration/>. For example, the registry can be configured as a pull through cache to Docker Hub by setting `REGISTRY_PROXY_REMOTEURL` to <https://registry-1.docker.io>. Note that it is not possible to push to a registry configured as a pull through cache. Default is `{}`.

#### `docker_registry_network_mode`

The network mode used for the docker registry container. Default is `host`. When set to `bridge`, port mapping is configured to expose the registry through port `docker_registry_port`.

**docker\_registry\_port**

The port on which the docker registry server should listen. Default is 4000. When `docker_registry_network_mode` is set to `host`, configures the port used by the registry server inside the container. When `docker_registry_network_mode` is set to `bridge`, configures the overlay network port.

**docker\_registry\_datadir\_volume**

Name or path to use as the volume for the docker registry. Default is `docker_registry`.

**TLS**

It is recommended to enable TLS for the registry.

**docker\_registry\_enable\_tls**

Whether to enable TLS for the registry. Default is `false`.

**docker\_registry\_cert\_path**

Path to a TLS certificate to use when TLS is enabled. Default is `none`.

**docker\_registry\_key\_path**

Path to a TLS key to use when TLS is enabled. Default is `none`.

For example, the certificate and key could be stored with the Kayobe configuration, under `${KAYOBE_CONFIG_PATH}/docker-registry/`. These files may be encrypted via Ansible Vault.

Listing 165: `docker-registry.yml`

```
docker_registry_enable_tls: true
docker_registry_cert_path: "{{ kayobe_config_path }}/docker-registry/cert.pem"
docker_registry_key_path: "{{ kayobe_config_path }}/docker-registry/key.pem"
```

**Basic authentication**

It is recommended to enable HTTP basic authentication for the registry. This needs to be done in conjunction with enabling TLS for the registry: [using basic authentication over unencrypted HTTP is not supported](#).

**docker\_registry\_enable\_basic\_auth**

Whether to enable basic authentication for the registry. Default is `false`.

**docker\_registry\_basic\_auth\_htpasswd\_path**

Path to a `htpasswd` formatted password store for the registry. Default is `none`.

The password store uses a `htpasswd` format. The following example shows how to generate a password and add it to the `kolla` user in the password store. The password store may be stored with the Kayobe configuration, under `${KAYOBE_CONFIG_PATH}/docker-registry/`. The file may be encrypted via Ansible Vault.

```
uuidgen | tr -d '\n' > registry-password
cat registry-password | docker run --rm -i --entrypoint htpasswd httpd:latest
↪ -niB kolla > $KAYOBE_CONFIG_PATH/docker-registry/htpasswd
```

Next we configure Kayobe to enable basic authentication for the registry, and specify the path to the password store.

Listing 166: docker-registry.yml

```
docker_registry_enable_basic_auth: true
docker_registry_basic_auth_htpasswd_path: "{{ kayobe_config_path }}/docker-
↳registry/htpasswd"
```

## Using the registry

Enabling the registry does not automatically set the configuration for the container engine to use it. This should be done via the *docker\_registry* or *podman\_registry* variables.

## TLS

If the registry is using a privately signed TLS certificate, it is necessary to *configure Docker engine with the CA certificate*.

If TLS is enabled, Docker engine should be configured to use HTTPS to communicate with it:

Listing 167: kolla/globals.yml

```
docker_registry_insecure: false
```

## Basic authentication

If basic authentication is enabled, Kolla Ansible needs to be configured with the username and password.

Listing 168: kolla.yml

```
kolla_docker_registry_username: <registry username>
kolla_docker_registry_password: <registry password>
```

## Seed custom containers

This section covers configuration of the user-defined containers deployment functionality that runs on the seed host.

## Configuration

For example, to deploy a squid container image:

Listing 169: seed.yml

```
seed_containers:
  squid:
    image: "stackhpc/squid:3.5.20-1"
    pre: "{{ kayobe_env_config_path }}/containers/squid/pre.yml"
    post: "{{ kayobe_env_config_path }}/containers/squid/post.yml"
    pre_destroy: "{{ kayobe_env_config_path }}/containers/squid/pre_destroy.
↳yml"
    post_destroy: "{{ kayobe_env_config_path }}/containers/squid/post_destroy.
↳yml"
```

Please notice the *optional* pre, post, pre\_destroy, and post\_destroy Ansible task files - those need to be created in kayobe-config path. The table below describes when they will run:

Table 2: Container hooks

Hook	Trigger point
pre	Before container deployment
post	After container deployment
pre_destroy	Before container is destroyed
post_destroy	After container is destroyed

Possible options for container deployment:

```
seed_containers:
  containerA:
    capabilities:
    command:
    comparisons:
    detach:
    env:
    network_mode:
    image:
    init:
    ipc_mode:
    pid_mode:
    ports:
    privileged:
    restart_policy:
    shm_size:
    sysctls:
    tag:
    ulimits:
    user:
    volumes:
```

For a detailed explanation of each option - please see [Ansible docker\\_container module](#) page.

List of Kayobe applied defaults to required docker\_container variables:

```
---
# Action to perform: One of: "deploy", "destroy".
manage_containers_action: "deploy"

deploy_containers_defaults:
  comparisons:
    image: strict
    env: strict
    volumes: strict
  detach: True
  network_mode: "host"
  init: True
```

(continues on next page)

(continued from previous page)

```
privileged: False
restart_policy: "unless-stopped"

deploy_containers_docker_api_timeout: 120

deploy_containers_registry_attempt_login: "{{ kolla_docker_registry_username_
→is truthy and kolla_docker_registry_password is truthy }}"
```

## Docker registry

Seed containers can be pulled from a docker registry deployed on the seed, since the docker registry deployment step precedes the custom container deployment step.

It is also possible to deploy a custom containerised docker registry as a custom seed container. In this case, basic authentication login attempts can be disabled by setting

Listing 170: seed.yml

```
seed_deploy_containers_registry_attempt_login: false
```

Without this setting, the login will fail because the registry has not yet been deployed.

More information on deploying a docker registry can be found [here](#).

## Infrastructure VMs

Kayobe can deploy infrastructure VMs to the seed-hypervisor. These can be used to provide supplementary services that do not run well within a containerised environment or are dependencies of the control plane.

## Configuration

To deploy an infrastructure VM, add a new host to the `infra-vms` group in the inventory:

Listing 171: \$KAYOBE\_CONFIG\_PATH/inventory/infra-vms

```
[infra-vms]
an-example-vm
```

The configuration of the virtual machine should be done using `host_vars`. These override the `group_vars` defined for the `infra-vms` group. Most variables have sensible defaults defined, but there are a few variables which must be set.

## Mandatory variables

All networks must have an interface defined, as described in *Per-host Network Configuration*. By default the VMs are attached to the admin overcloud network. If, for example, `admin_oc_net_name` was set to `example_net`, you would need to define `example_net_interface`. It is possible to change the list of networks that a VM is attached to by modifying `infra_vm_network_interfaces`. Additional interfaces can be added by setting `infra_vm_network_interfaces_extra`.

List of Kayobe applied defaults to required `docker_container` variables. Any of these variables can be overridden with a `host_var`.

```

---
#####
↪#
# Infrastructure VM configuration.

# Name of the infra VM.
infra_vm_name: "{{ inventory_hostname }}"

# Memory in MB.
infra_vm_memory_mb: "{{ 16 * 1024 }}"

# Number of vCPUs.
infra_vm_vcpus: 4

# List of volumes.
infra_vm_volumes:
  - "{{ infra_vm_root_volume }}"
  - "{{ infra_vm_data_volume }}"

# Root volume.
infra_vm_root_volume:
  name: "{{ infra_vm_name }}-root"
  pool: "{{ infra_vm_pool }}"
  capacity: "{{ infra_vm_root_capacity }}"
  format: "{{ infra_vm_root_format }}"
  image: "{{ infra_vm_root_image }}"

# Data volume.
infra_vm_data_volume:
  name: "{{ infra_vm_name }}-data"
  pool: "{{ infra_vm_pool }}"
  capacity: "{{ infra_vm_data_capacity }}"
  format: "{{ infra_vm_data_format }}"

# Name of the storage pool for the infra VM volumes.
infra_vm_pool: default

# Capacity of the infra VM root volume.
infra_vm_root_capacity: 50G

# Format of the infra VM root volume.
infra_vm_root_format: qcow2

# Base image for the infra VM root volume. Default is
# "https://cloud-images.ubuntu.com/noble/current/noble-server-cloudimg-amd64.
↪img"
# when os_distribution is "ubuntu", or
# https://dl.rockylinux.org/pub/rocky/9/images/x86_64/Rocky-9-GenericCloud.
↪latest.x86_64.qcow2
# when os_distribution is "rocky",

```

(continues on next page)

(continued from previous page)

```

# or
# "https://cloud.centos.org/centos/9-stream/x86_64/images/CentOS-Stream-
↳GenericCloud-9-latest.x86_64.qcow2"
# otherwise.
infra_vm_root_image: >-
  {%- if os_distribution == 'ubuntu' %}
  https://cloud-images.ubuntu.com/noble/current/noble-server-cloudimg-amd64.
↳img
  {%- elif os_distribution == 'rocky' %}
  https://dl.rockylinux.org/pub/rocky/9/images/x86_64/Rocky-9-GenericCloud.
↳latest.x86_64.qcow2
  {%- else -%}
  https://cloud.centos.org/centos/9-stream/x86_64/images/CentOS-Stream-
↳GenericCloud-9-latest.x86_64.qcow2
  {%- endif %}

# Capacity of the infra VM data volume.
infra_vm_data_capacity: 100G

# Format of the infra VM data volume.
infra_vm_data_format: qcow2

# List of network interfaces to attach to the infra VM.
infra_vm_interfaces: "{{ network_interfaces | sort | map('net_libvirt_vm_
↳network') | list }}"

# Hypervisor that the VM runs on.
infra_vm_hypervisor: "{{ groups['seed-hypervisor'] | first }}"

# Customise ansible_ssh_extra_args for the test that checks SSH connectivity
# after provisioning. Defaults to disabling ssh host key checking.
infra_vm_wait_connection_ssh_extra_args: '-o StrictHostKeyChecking=no'

# OS family. Needed for config drive generation.
infra_vm_os_family: "{{ 'RedHat' if os_distribution in ['centos', 'rocky']_
↳else 'Debian' }}"

# Boot firmware. Possible values are 'bios' or 'efi'. Default is 'efi'.
infra_vm_boot_firmware: "efi"

# Machine type. Libvirt default configuration is used.
infra_vm_machine:

#####
↳#
# Infrastructure VM node configuration.

# User with which to access the infrastructure vm via SSH during bootstrap, in
# order to setup the Kayobe user account. Default is {{ os_distribution }}.
```

(continues on next page)

(continued from previous page)

```

infra_vm_bootstrap_user: "{{ os_distribution }}"

#####
↪#
# Infrastructure VM network interface configuration.

# List of networks to which infrastructure vm nodes are attached.
infra_vm_network_interfaces: >
  {{ (infra_vm_default_network_interfaces +
      infra_vm_extra_network_interfaces) | select | unique | list }}

# List of default networks to which infrastructure vm nodes are attached.
infra_vm_default_network_interfaces: >
  {{ [admin_oc_net_name] | select | unique | list }}

# List of extra networks to which infrastructure vm nodes are attached.
infra_vm_extra_network_interfaces: []

#####
↪#
# Infrastructure VM node software RAID configuration.

# List of software RAID arrays. See mrlesmithjr.mdadm role for format.
infra_vm_mdadm_arrays: []

#####
↪#
# Infrastructure VM node encryption configuration.

# List of block devices to encrypt. See stackhpc.luks role for format.
infra_vm_luks_devices: []

#####
↪#
# Infrastructure VM node LVM configuration.

# List of infrastructure vm volume groups. See mrlesmithjr.manage_lvm role for
# format.
infra_vm_lvm_groups: "{{ infra_vm_lvm_groups_default + infra_vm_lvm_groups_
↪extra }}"

# Default list of infrastructure vm volume groups. See mrlesmithjr.manage_lvm
# role for format.
infra_vm_lvm_groups_default: "{{ [infra_vm_lvm_group_data] if infra_vm_lvm_
↪group_data_enabled | bool else [] }}"

# Additional list of infrastructure vm volume groups. See mrlesmithjr.manage_
↪lvm
# role for format.

```

(continues on next page)

(continued from previous page)

```

infra_vm_lvm_groups_extra: []

# Whether a 'data' LVM volume group should exist on the infrastructure vm. By
# default this contains a 'docker-volumes' logical volume for Docker volume
# storage. Default is false.
infra_vm_lvm_group_data_enabled: false

# Infrastructure VM LVM volume group for data. See mrlesmithjr.manage_lvm role
# for format.
infra_vm_lvm_group_data:
  vgname: data
  disks: "{{{ infra_vm_lvm_group_data_disks }}}"
  create: True
  lvnames: "{{{ infra_vm_lvm_group_data_lvs }}}"

# List of disks for use by infrastructure vm LVM data volume group. Default to
# an invalid value to require configuration.
infra_vm_lvm_group_data_disks:
  - changeme

# List of LVM logical volumes for the data volume group when using docker.
infra_vm_lvm_group_data_docker_lvs:
  - "{{{ infra_vm_lvm_group_data_lv_docker_volumes }}}"

# List of LVM logical volumes for the data volume group when using podman.
infra_vm_lvm_group_data_podman_lvs:
  - "{{{ infra_vm_lvm_group_data_lv_podman_volumes }}}"

# List of LVM logical volumes for the data volume group.
infra_vm_lvm_group_data_lvs: "{{{ infra_vm_lvm_group_data_podman_lvs if_
→container_engine == 'podman' else infra_vm_lvm_group_data_docker_lvs }}}"

# Docker volumes LVM backing volume.
infra_vm_lvm_group_data_lv_docker_volumes:
  lvname: docker-volumes
  size: "{{{ infra_vm_lvm_group_data_lv_docker_volumes_size }}}"
  create: True
  filesystem: "{{{ infra_vm_lvm_group_data_lv_docker_volumes_fs }}}"
  mount: True
  mnttp: "{{{ docker_volumes_path }}}"

infra_vm_lvm_group_data_lv_podman_volumes:
  lvname: podman-volumes
  size: "{{{ infra_vm_lvm_group_data_lv_podman_volumes_size }}}"
  create: True
  filesystem: "{{{ infra_vm_lvm_group_data_lv_podman_volumes_fs }}}"
  mount: True
  mnttp: "{{{ podman_volumes_path }}}"

```

(continues on next page)

(continued from previous page)

```

# Size of docker volumes LVM backing volume.
infra_vm_lvm_group_data_lv_docker_volumes_size: 75%VG

# Filesystem for docker volumes LVM backing volume. ext4 allows for shrinking.
infra_vm_lvm_group_data_lv_docker_volumes_fs: ext4

# Size of podman volumes LVM backing volume.
infra_vm_lvm_group_data_lv_podman_volumes_size: 75%VG

# Filesystem for podman volumes LVM backing volume. ext4 allows for shrinking.
infra_vm_lvm_group_data_lv_podman_volumes_fs: ext4

#####
↪#
# Infrastructure VM node sysctl configuration.

# Dict of sysctl parameters to set.
infra_vm_sysctl_parameters: {}

#####
↪#
# Infrastructure VM node tuned configuration.

# Builtin tuned profile to use. Format is same as that used by giovtorres.
↪tuned
# role. Default is virtual-guest.
infra_vm_tuned_active_builtin_profile: "virtual-guest"

#####
↪#
# Infrastructure VM node user configuration.

# List of users to create. This should be in a format accepted by the
# singleplatform-eng.users role.
infra_vm_users: "{{ users_default }}"

#####
↪#
# Infrastructure VM node firewalld configuration.

# Whether to install and enable firewalld.
infra_vm_firewalld_enabled: false

# A list of zones to create. Each item is a dict containing a 'zone' item.
infra_vm_firewalld_zones: []

# A firewalld zone to set as the default. Default is unset, in which case the
# default zone will not be changed.
infra_vm_firewalld_default_zone:

```

(continues on next page)

(continued from previous page)

```
# A list of firewall rules to apply. Each item is a dict containing arguments
# to pass to the firewalld module. Arguments are omitted if not provided, with
# the following exceptions:
# - offline: true
# - permanent: true
# - state: enabled
infra_vm_firewalld_rules: []

#####
↪#
# Infrastructure VM node swap configuration.

# List of swap devices. Each item is a dict containing a 'device' item.
infra_vm_swap: []
```

## Customisations

Examples of common customisations are shown below.

By default the Ansible inventory name is used as the name of the VM. This may be overridden via `infra_vm_name`:

Listing 172: `$KAYOBE_CONFIG_PATH/inventory/host_vars/  
an-example-vm`

```
# Name of the infra VM.
infra_vm_name: "the-special-one"
```

By default the VM has 16G of RAM. This may be changed via `infra_vm_memory_mb`:

Listing 173: `$KAYOBE_CONFIG_PATH/inventory/host_vars/  
an-example-vm`

```
# Memory in MB. Defaults to 16GB.
infra_vm_memory_mb: "{{ 8 * 1024 }}"
```

The default network configuration attaches infra VMs to the admin network. If this is not appropriate, modify `infra_vm_network_interfaces`. At a minimum the network interface name for the network should be defined.

Listing 174: `$KAYOBE_CONFIG_PATH/inventory/host_vars/  
an-example-vm`

```
# Network interfaces that the VM is attached to.
infra_vm_network_interfaces:
  - aio

# Mandatory: All networks must have an interface defined.
aio_interface: eth0
```

(continues on next page)

(continued from previous page)

```
# By default kayobe will connect to a host via ``admin_oc_net``.
# As we have not attached this VM to this network, we must override
# ansible_host.
ansible_host: "{{ 'aio' | net_ip }}"
```

Configuration for all VMs can be set using `extra_vars` defined in `$KAYOBE_CONFIG_PATH/infra-vms.yml`. Note that normal Ansible precedence rules apply and the variables will override any `host_vars`. If you need to override the defaults, but still maintain per-host settings, use `group_vars` instead.

## Deploying the virtual machine

Once the initial configuration has been done follow the steps in [Infrastructure VMs](#).

## Virtual GPUs

Kayobe contains playbooks to configure virtualised GPUs on supported NVIDIA hardware. This allows you to statically create mdev devices that can be used by Nova to present a virtualised GPU to guest VMs. Known working GPUs are:

- NVIDIA A100

## BIOS configuration

### Intel

- Enable VT-x in the BIOS for virtualisation support.
- Enable VT-d in the BIOS for IOMMU support.

### AMD

- Enable AMD-V in the BIOS for virtualisation support.
- Enable AMD-Vi in the BIOS for IOMMU support.

## Example: Dell

Enabling SR-IOV with *racadm*:

```
/opt/dell/srvadmin/bin/idracadm7 set BIOS.IntegratedDevices.SriovGlobalEnable
↪Enabled
/opt/dell/srvadmin/bin/idracadm7 jobqueue create BIOS.Setup.1-1
<reboot>
```

Enabling CPU Virtualization with *racadm*:

```
/opt/dell/srvadmin/bin/idracadm7 set BIOS.ProcSettings.ProcVirtualization
↪Enabled
/opt/dell/srvadmin/bin/idracadm7 jobqueue create BIOS.Setup.1-1
<reboot>
```

## Obtain driver from NVIDIA licensing portal

Download NVIDIA GRID driver from [here](#) (This requires a login).

## Configuration

### See also

For further context, please see:

- *Kayobe Configuration*

Add hosts with supported GPUs to the compute-vgpu group. If using bifrost and the kayobe overcloud inventory discover mechanism, this can be achieved with:

Listing 175: \$KAYOBE\_CONFIG\_PATH/overcloud.yaml

```
overcloud_group_hosts_map:
  compute-vgpu:
    - "computeegpu000"
```

Configure the location of the NVIDIA driver:

Listing 176: \$KAYOBE\_CONFIG\_PATH/vgpu.yaml

```
---
vgpu_driver_url: "https://example.com/NVIDIA-GRID-Linux-KVM-525.105.14-525.
↪105.17-528.89.zip"
```

If you don't know which vGPU types your card supports, these can be determined by following [NVIDIA vGPU types](#).

You can then define group\_vars describing the vGPU configuration:

Listing 177: \$KAYOBE\_CONFIG\_PATH/inventory/  
group\_vars/compute-vgpu/vgpu

```
#nvidia-692 GRID A100D-4C
#nvidia-693 GRID A100D-8C
#nvidia-694 GRID A100D-10C
#nvidia-695 GRID A100D-16C
#nvidia-696 GRID A100D-20C
#nvidia-697 GRID A100D-40C
#nvidia-698 GRID A100D-80C
#nvidia-699 GRID A100D-1-10C
#nvidia-700 GRID A100D-2-20C
#nvidia-701 GRID A100D-3-40C
#nvidia-702 GRID A100D-4-40C
#nvidia-703 GRID A100D-7-80C
#nvidia-707 GRID A100D-1-10CME
vgpu_definitions:
  # Configuring a MIG backed VGPU
```

(continues on next page)

(continued from previous page)

```

- pci_address: "0000:17:00.0"
mig_devices:
    # This section describes how to partition the card using MIG. The key
    # in the dictionary represents a MIG profile supported by your card and
    # the value is the number of MIG devices of that type that you want
    # to create. The vGPUS are then created on top of these MIG devices.
    # The available profiles can be found in the NVIDIA documentation:
    # https://docs.nvidia.com/grid/15.0/grid-vgpu-user-guide/index.html
↪#virtual-gpu-types-grid-reference
    "1g.10gb": 1
    "2g.20gb": 3
virtual_functions:
    # The mdev type is the NVIDIA identifier for a particular vGPU. When
↪using
    # MIG backed vGPUs these must match up with your MIG devices. See the
↪NVIDIA
    # vGPU types section in this document.
    - mdev_type: nvidia-700
      index: 0
    - mdev_type: nvidia-700
      index: 1
    - mdev_type: nvidia-700
      index: 2
    - mdev_type: nvidia-699
      index: 3
# Configuring a card in a time-sliced configuration (non-MIG backed)
- pci_address: "0000:65:00.0"
virtual_functions:
    - mdev_type: nvidia-697
      index: 0
    - mdev_type: nvidia-697
      index: 1

```

To apply this configuration, use:

```
(kayobe) $ kayobe overcloud host configure -t vgpu
```

## NVIDIA vGPU types

### See also

For further context, please see:

- [NVIDIA docs on vGPU types](#)
- *Kolla Ansible Configuration*

The NVIDIA vGPU drivers must be installed to be able to query for the available vGPU types. This can be achieved by not defining any virtual functions in the vGPU definition:

Listing 178: `$KAYOBE_CONFIG_PATH/inventory/  
group_vars/compute-vgpu/vgpu`

```
vgpu_definitions:  
- pci_address: "0000:17:00.0"  
  virtual_functions: []
```

See *Configuration*. You can then use `mdevctl` to query for the available vGPU types.

```
mdevctl types
```

## Kolla Ansible configuration

### See also

For further context, please see:

- [Attaching virtual GPU devices to guests in the Nova documentation](#)
- *Kolla Ansible Configuration*

To use the mdev devices that were created, modify `nova.conf` to add a list of mdev devices that can be passed through to guests:

Listing 179: `$KAYOBE_CONFIG_PATH/kolla/config/nova/  
nova-compute.conf`

```
{% raw %}  
{% if inventory_hostname in groups['compute-vgpu'] %}  
[devices]  
enabled_mdev_types = nvidia-700, nvidia-699, nvidia-697  
[mdev_nvidia-700]  
device_addresses = 0000:17:00.4,0000:17:00.5,0000:17:00.6  
mdev_class = CUSTOM_NVIDIA_700  
[mdev_nvidia-699]  
device_addresses = 0000:17:00.7  
mdev_class = CUSTOM_NVIDIA_699  
[mdev_nvidia-697]  
device_addresses = 0000:65:00.4,0000:65:00.5  
mdev_class = CUSTOM_NVIDIA_697  
{% endif %}  
{% endraw %}
```

You will need to adjust the PCI addresses to match the virtual function addresses. These can be obtained by checking the `mdevctl` configuration after applying the *configuration*:

```
# mdevctl list  
73269d0f-b2c9-438d-8f28-f9e4bc6c6995 0000:17:00.4 nvidia-700 manual (defined)  
dc352ef3-efeb-4a5d-a48e-912eb230bc76 0000:17:00.5 nvidia-700 manual (defined)  
a464fbae-1f89-419a-a7bd-3a79c7b2eef4 0000:17:00.6 nvidia-700 manual (defined)
```

(continues on next page)

(continued from previous page)

```
f3b823d3-97c8-4e0a-ae1b-1f102dcb3bce 0000:17:00.7 nvidia-699 manual (defined)
330be289-ba3f-4416-8c8a-b46ba7e51284 0000:65:00.4 nvidia-700 manual (defined)
1ba5392c-c61f-4f48-8fb1-4c6b2bbb0673 0000:65:00.5 nvidia-700 manual (defined)
f6868020-eb3a-49c6-9701-6c93e4e3fa9c 0000:65:00.6 nvidia-700 manual (defined)
00501f37-c468-5ba4-8be2-8d653c4604ed 0000:65:00.7 nvidia-699 manual (defined)
```

The `mdev_class` maps to a resource class that you can set in your flavor definition. Note that if you only define a single `mdev` type on a given hypervisor, then the `mdev_class` configuration option is silently ignored and it will use the `VGPU` resource class (See [bug 1943934](#)).

To apply the configuration to Nova:

```
(kayobe) $ kayobe overcloud service deploy -kt nova
```

## OpenStack flavors

Define some flavors that request the resource class that was configured in `nova.conf`. An example definition, that can be used with `openstack.cloud.compute_flavor` Ansible module, is shown below:

```
openstack.cloud.compute_flavor:
  name: "vgpu.a100.2g.20gb"
  ram: 65536
  disk: 30
  vcpus: 8
  is_public: false
  extra_specs:
    hw:cpu_policy: "dedicated"
    hw:cpu_thread_policy: "prefer"
    hw:mem_page_size: "1GB"
    hw:cpu_sockets: 2
    hw:numa_nodes: 8
    hw_rng:allowed: "True"
  resources:CUSTOM_NVIDIA_700: "1"
```

## Changing VGPU device types

Converting the second card to an NVIDIA-698 (whole card). The hypervisor should be empty so we can freely delete mdevs. If this is not the case you will need to check which mdevs are in use and use extreme caution. First clean up the mdev definitions to make room for the new device:

```
[stack@compute000 ~]$ sudo mdevctl list
5c630867-a673-5d75-aa31-a499e6c7cb19 0000:21:00.4 nvidia-697 manual (defined)
eaa6e018-308e-58e2-b351-aadbcf01f5a8 0000:21:00.5 nvidia-697 manual (defined)
72291b01-689b-5b7a-9171-6b3480deabf4 0000:81:00.4 nvidia-697 manual (defined)
0a47ffd1-392e-5373-8428-707a4e0ce31a 0000:81:00.5 nvidia-697 manual (defined)

[stack@compute000 ~]$ sudo mdevctl stop --uuid 72291b01-689b-5b7a-9171-
↪6b3480deabf4
[stack@compute000 ~]$ sudo mdevctl stop --uuid 0a47ffd1-392e-5373-8428-
↪707a4e0ce31a
```

(continues on next page)

(continued from previous page)

```
[stack@computegpu000 ~]$ sudo mdevctl undefine --uuid 0a47ffd1-392e-5373-8428-
↪707a4e0ce31a
[stack@computegpu000 ~]$ sudo mdevctl undefine --uuid 72291b01-689b-5b7a-9171-
↪6b3480deabf4

[stack@computegpu000 ~]$ sudo mdevctl list --defined
5c630867-a673-5d75-aa31-a499e6c7cb19 0000:21:00.4 nvidia-697 manual (active)
eaa6e018-308e-58e2-b351-aadbcf01f5a8 0000:21:00.5 nvidia-697 manual (active)

# We can re-use the first virtual function
```

Secondly remove the systemd unit that starts the mdev device:

```
[stack@computegpu000 ~]$ sudo rm /etc/systemd/system/multi-user.target.wants/
↪nvidia-mdev@0a47ffd1-392e-5373-8428-707a4e0ce31a.service
[stack@computegpu000 ~]$ sudo rm /etc/systemd/system/multi-user.target.wants/
↪nvidia-mdev@72291b01-689b-5b7a-9171-6b3480deabf4.service
```

Adapt your *Kayobe* and *Kolla Ansible* configuration to match the desired state and then re-run host configure:

```
(kayobe) $ kayobe overcloud host configure --tags vgpu --limit computegpu000
```

Check the result:

```
[stack@computegpu000 ~]$ mdevctl list
5c630867-a673-5d75-aa31-a499e6c7cb19 0000:21:00.4 nvidia-697 manual
eaa6e018-308e-58e2-b351-aadbcf01f5a8 0000:21:00.5 nvidia-697 manual
72291b01-689b-5b7a-9171-6b3480deabf4 0000:81:00.4 nvidia-698 manual
```

Reconfigure nova to match the change:

```
(kayobe) $ kayobe overcloud service reconfigure -kt nova --kolla-limit_
↪computegpu000 --skip-prechecks
```

## Nova cells

In the Train release, Kolla Ansible gained full support for the Nova cells v2 scale out feature. Whilst configuring Nova cells is documented in *Kolla Ansible*, implementing that configuration in Kayobe is documented here.

In Kolla Ansible, Nova cells are configured via group variables. In Kayobe, these group variables can be set via Kayobe configuration. For example, to configure cell0001 the following file could be created:

Listing 180: \$KAYOBE\_CONFIG\_PATH/kolla/inventory/  
group\_vars/cell0001/all

```
---
nova_cell_name: cell0001
nova_cell_novncproxy_group: cell0001-vnc
```

(continues on next page)

(continued from previous page)

```
nova_cell_conductor_group: cell0001-control
nova_cell_compute_group: cell0001-compute
```

After defining the cell group\_vars the Kayobe inventory can be configured. In Kayobe, cell controllers and cell compute hosts become part of the existing controllers and compute Kayobe groups because typically they will need to be provisioned in the same way. In Kolla Ansible, to prevent non-cell services being mapped to cell controllers, the controllers group must be split into two. The inventory file should also include the cell definitions. The following groups and hosts files give an example of how this may be achieved:

Listing 181: \$KAYOBE\_CONFIG\_PATH/inventory/groups

```
# Kayobe groups inventory file. This file should generally not be modified.
# If declares the top-level groups and sub-groups.

#####
→##
# Seed groups.

[seed]
# Empty group to provide declaration of seed group.

[seed-hypervisor]
# Empty group to provide declaration of seed-hypervisor group.

[container-image-builders:children]
# Build container images on the seed by default.
seed

#####
→##
# Overcloud groups.

[controllers]
# Empty group to provide declaration of controllers group.

[network:children]
# Add controllers to network group by default for backwards compatibility,
# although they could be separate hosts.
top-level-controllers

[monitoring]
# Empty group to provide declaration of monitoring group.

[storage]
# Empty group to provide declaration of storage group.

[compute]
# Empty group to provide declaration of compute group.
```

(continues on next page)

(continued from previous page)

```

# Empty group to provide declaration of top-level controllers.
[top-level-controllers]

[overcloud:children]
controllers
network
monitoring
storage
compute

#####
↪##
# Docker groups.

[docker:children]
# Hosts in this group will have Docker installed.
seed
controllers
network
monitoring
storage
compute

[docker-registry:children]
# Hosts in this group will have a Docker Registry deployed. This group should
# generally contain only a single host, to avoid deploying multiple.
↪independent
# registries which may become unsynchronized.
seed

#####
↪##
# Baremetal compute node groups.

[baremetal-compute]
# Empty group to provide declaration of baremetal-compute group.

#####
↪##
# Networking groups.

[mgmt-switches]
# Empty group to provide declaration of mgmt-switches group.

[ctl-switches]
# Empty group to provide declaration of ctl-switches group.

[hs-switches]
# Empty group to provide declaration of hs-switches group.

```

(continues on next page)

(continued from previous page)

```
[switches:children]
mgmt-switches
ctl-switches
hs-switches
```

Listing 182: \$KAYOBE\_CONFIG\_PATH/inventory/hosts

```
# Kayobe hosts inventory file. This file should be modified to define the
↪hosts
# and their top-level group membership.

# This host acts as the configuration management Ansible control host. This
↪must be
# localhost.
localhost ansible_connection=local

[seed-hypervisor]
# Add a seed hypervisor node here if required. This host will run a seed node
# Virtual Machine.

[seed]
operator

[controllers:children]
top-level-controllers
cell-controllers

[top-level-controllers]
control01

[cell-controllers:children]
cell01-control
cell02-control

[compute:children]
cell01-compute
cell02-compute

[cell01:children]
cell01-control
cell01-compute
cell01-vnc

[cell01-control]
control02

[cell01-vnc]
control02
```

(continues on next page)

(continued from previous page)

```
[cell01-compute]
compute01

[cell02:children]
cell02-control
cell02-compute
cell02-vnc

[cell02-control]
control03

[cell02-vnc]
control03

[cell02-compute]
compute02
compute03

#####

[mgmt-switches]
# Add management network switches here if required.

[ctl-switches]
# Add control and provisioning switches here if required.

[hs-switches]
# Add high speed switches here if required.
```

Having configured the Kayobe inventory, the Kolla Ansible inventory can be configured. Currently this can be done via the `kolla_overcloud_inventory_top_level_group_map` variable. For example, to configure the two cells defined in the Kayobe inventory above, the variable could be set to the following:

Listing 183: `$KAYOBE_CONFIG_PATH/kolla.yml`

```
kolla_overcloud_inventory_top_level_group_map:
  control:
    groups:
      - top-level-controllers
  network:
    groups:
      - network
  compute:
    groups:
      - compute
  monitoring:
    groups:
      - monitoring
  cell-control:
```

(continues on next page)

(continued from previous page)

```
groups:
  - cell-controllers
cell0001:
  groups:
    - cell01
cell0001-control:
  groups:
    - cell01-control
cell0001-compute:
  groups:
    - cell01-compute
cell0001-vnc:
  groups:
    - cell01-vnc
cell0002:
  groups:
    - cell02
cell0002-control:
  groups:
    - cell02-control
cell0002-compute:
  groups:
    - cell02-compute
cell0002-vnc:
  groups:
    - cell02-vnc
```

Finally, Nova cells can be enabled in Kolla Ansible:

Listing 184: \$KAYOBE\_CONFIG\_PATH/kolla/globals.yml

```
enable_cells: True
```

## 3.7 Deployment

This section describes usage of Kayobe to install an OpenStack cloud onto a set of bare metal servers. We assume access is available to a node which will act as the hypervisor hosting the seed node in a VM. We also assume that this seed hypervisor has access to the bare metal nodes that will form the OpenStack control plane. Finally, we assume that the control plane nodes have access to the bare metal nodes that will form the workload node pool.

### See also

Information on the configuration of a Kayobe environment is available [here](#).

### 3.7.1 Ansible Control Host

Before starting deployment we must bootstrap the Ansible control host. Tasks performed here include:

- Install required Ansible roles from Ansible Galaxy.
- Generate an SSH key if necessary and add it to the current users authorised keys.
- Install Kolla Ansible locally at the configured version.

To bootstrap the Ansible control host:

```
(kayobe) $ kayobe control host bootstrap
```

### 3.7.2 Physical Network

The physical network can be managed by Kayobe, which uses Ansibles network modules. Currently the most popular switches for cloud infrastructure are supported but this could easily be extended. To provision the physical network:

```
(kayobe) $ kayobe physical network configure --group <group> [--enable-  
↪discovery]
```

The `--group` argument is used to specify an Ansible group containing the switches to be configured.

The `--enable-discovery` argument enables a one-time configuration of ports attached to baremetal compute nodes to support hardware discovery via ironic inspector.

It is possible to limit the switch interfaces that will be configured, either by interface name or interface description:

```
(kayobe) $ kayobe physical network configure --group <group> --interface-  
↪limit <interface names>  
(kayobe) $ kayobe physical network configure --group <group> --interface-  
↪description-limit <interface descriptions>
```

The names or descriptions should be separated by commas. This may be useful when adding compute nodes to an existing deployment, in order to avoid changing the configuration interfaces in use by active nodes.

The `--display` argument will display the candidate switch configuration, without actually applying it.

#### See also

Information on configuration of physical network devices is available [here](#).

### 3.7.3 Seed Hypervisor

#### Note

It is not necessary to run the seed services in a VM. To use an existing bare metal host or a VM provisioned outside of Kayobe, this section may be skipped.

#### Host Configuration

To configure the seed hypervisors host OS, and the Libvirt/KVM virtualisation support:

```
(kayobe) $ kayobe seed hypervisor host configure
```

#### See also

Information on configuration of hosts is available [here](#).

### 3.7.4 Seed

#### VM Provisioning

#### Note

It is not necessary to run the seed services in a VM. To use an existing bare metal host or a VM provisioned outside of Kayobe, this step may be skipped. Ensure that the Ansible inventory contains a host for the seed.

The seed hypervisor should have CentOS or Rocky or Ubuntu with `libvirt` installed. It should have `libvirt` networks configured for all networks that the seed VM needs access to and a `libvirt` storage pool available for the seed VMs volumes. To provision the seed VM:

```
(kayobe) $ kayobe seed vm provision
```

When this command has completed the seed VM should be active and accessible via SSH. Kayobe will update the Ansible inventory with the IP address of the VM.

## Host Configuration

To configure the seed host OS:

```
(kayobe) $ kayobe seed host configure
```

### Note

If the seed host uses disks that have been in use in a previous installation, it may be necessary to wipe partition and LVM data from those disks. To wipe all disks that are not mounted during host configuration:

```
(kayobe) $ kayobe seed host configure --wipe-disks
```

### See also

Information on configuration of hosts is available [here](#).

## Building Container Images

### Note

It is possible to use prebuilt container images from an image registry such as Quay.io. In this case, this step can be skipped.

It is possible to use prebuilt container images from an image registry such as Quay.io. In some cases it may be necessary to build images locally either to apply local image customisation or to use a downstream version of kolla. Images are built by hosts in the `container-image-builders` group, which by default includes the `seed`.

To build container images:

```
(kayobe) $ kayobe seed container image build
```

It is possible to build a specific set of images by supplying one or more image name regular expressions:

```
(kayobe) $ kayobe seed container image build bifrost-deploy
```

In order to push images to a registry after they are built, add the `--push` argument.

### See also

Information on configuration of Kolla for building container images is available [here](#).

## Deploying Containerised Services

At this point the seed services need to be deployed on the seed VM. These services are deployed in the `bifrost_deploy` container.

This command will also build the Operating System image that will be used to deploy the overcloud nodes using Disk Image Builder (DIB), if `overcloud_dib_build_host_images` is set to `False`.

### Note

If you are using Rocky Linux - building of the Operating System image needs to be done using `kayobe overcloud host image build`.

To deploy the seed services in containers:

```
(kayobe) $ kayobe seed service deploy
```

After this command has completed the seed services will be active.

### Note

Bifrost deployment behaviour is split between Kayobe and Kolla-Ansible. As such, you should use both `--tags kolla-bifrost` and `--kolla-tags bifrost` if you want to limit to Bifrost deployment.

### See also

Information on configuration of Kolla Ansible is available [here](#). See [here](#) for information about configuring Bifrost. [Overcloud root disk image configuration](#) provides information on configuring the root disk image build process. See [here](#) for information about deploying additional, custom services (containers) on a seed node.

## Building Deployment Images

### Note

It is possible to use prebuilt deployment images. In this case, this step can be skipped.

It is possible to use prebuilt deployment images from the [OpenStack hosted tarballs](#) or another source. In some cases it may be necessary to build images locally either to apply local image customisation or to use a downstream version of Ironi Python Agent (IPA). In order to build IPA images, the `ipa_build_images` variable should be set to `True`.

To build images locally:

```
(kayobe) $ kayobe seed deployment image build
```

If images have been built previously, they will not be rebuilt. To force rebuilding images, use the `--force-rebuild` argument.

**See also**

See [here](#) for information on how to configure the IPA image build process.

## Building Overcloud Host Disk Images

**Note**

This step is only relevant if `overcloud_dib_build_host_images` is set to `True`, which is the default since the Zed release.

Host disk images are deployed on overcloud hosts during provisioning. To build host disk images:

```
(kayobe) $ kayobe overcloud host image build
```

If images have been built previously, they will not be rebuilt. To force rebuilding images, use the `--force-rebuild` argument.

**See also**

See [here](#) for information on how to configure the overcloud host disk image build process.

## Accessing the Seed via SSH (Optional)

For SSH access to the seed, first determine the seeds IP address. We can use the `kayobe configuration dump` command to inspect the seeds IP address:

```
(kayobe) $ kayobe configuration dump --host seed --var-name ansible_host
```

The `kayobe_ansible_user` variable determines which user account will be used by Kayobe when accessing the machine via SSH. By default this is `stack`. Use this user to access the seed:

```
$ ssh <kayobe ansible user>@<seed VM IP>
```

To see the active containers:

**Note**

Examples show the commands when using Docker as the container engine. If using Podman, simply change `docker` for `sudo podman` in the command.

```
$ docker ps
```

Leave the seed VM and return to the shell on the Ansible control host:

```
$ exit
```

### 3.7.5 Infrastructure VMs

#### Warning

Support for infrastructure VMs is considered experimental: its design may change in future versions without a deprecation period.

#### Note

It necessary to perform some configuration before these steps can be followed. Please see *Infrastructure VMs*.

### VM Provisioning

The hypervisor used to host a VM is controlled via the `infra_vm_hypervisor` variable. It defaults to use the seed hypervisor. All hypervisors should have CentOS or Ubuntu with `libvirt` installed. It should have `libvirt` networks configured for all networks that the VM needs access to and a `libvirt` storage pool available for the VMs volumes. The steps needed for for the *seed* and the *seed hypervisor* can be found above.

To provision the infra VMs:

```
(kayobe) $ kayobe infra vm provision
```

When this command has completed the infra VMs should be active and accessible via SSH. Kayobe will update the Ansible inventory with the IP address of the VM.

### Host Configuration

To configure the infra VM host OS:

```
(kayobe) $ kayobe infra vm host configure
```

#### Note

If the infra VM host uses disks that have been in use in a previous installation, it may be necessary to wipe partition and LVM data from those disks. To wipe all disks that are not mounted during host configuration:

```
(kayobe) $ kayobe infra vm host configure --wipe-disks
```

#### See also

Information on configuration of hosts is available [here](#).

## Using Hooks to deploy services on the VMs

A no-op service deployment command is provided to perform additional configuration. The intention is for users to define *hooks to custom playbooks* that define any further configuration or service deployment necessary.

To trigger the hooks:

```
(kayobe) $ kayobe infra vm service deploy
```

### Example

In this example we have an infra VM host called `dns01` that provides DNS services. The host could be added to a `dns-servers` group in the inventory:

Listing 185: `$KAYOBE_CONFIG_PATH/inventory/infra-vms`

```
[dns-servers]
an-example-vm

[infra-vms:children]
dns-servers
```

We have a custom playbook targeting the `dns-servers` group that sets up the DNS server:

Listing 186: `$KAYOBE_CONFIG_PATH/ansible/dns-server.yml`

```
---
- name: Deploy DNS servers
  hosts: dns-servers
  tasks:
    - name: Install bind packages
      package:
        name:
          - bind
          - bind-utils
      become: true
```

Finally, we add a symlink to set up the playbook as a hook for the `kayobe infra vm service deploy` command:

```
(kayobe) $ mkdir -p ${KAYOBE_CONFIG_PATH}/hooks/infra-vm-host-configure/post.d
(kayobe) $ cd ${KAYOBE_CONFIG_PATH}/hooks/infra-vm-host-configure/post.d
(kayobe) $ ln -s ../../../../ansible/dns-server.yml 50-dns-server.yml
```

## 3.7.6 Overcloud

### Discovery

#### Note

If discovery of the overcloud is not possible, a static inventory of servers using the bifrost `servers.yml` file format may be configured using the `kolla_bifrost_servers` variable in `${KAYOBE_CONFIG_PATH}/bifrost.yml`.

Discovery of the overcloud is supported by the ironic inspector service running in the `bifrost_deploy` container on the seed. The service is configured to PXE boot unrecognised MAC addresses with an IPA ramdisk for introspection. If an introspected node does not exist in the ironic inventory, ironic inspector will create a new entry for it.

Discovery of the overcloud is triggered by causing the nodes to PXE boot using a NIC attached to the overcloud provisioning network. For many servers this will be the factory default and can be performed by powering them on.

On completion of the discovery process, the overcloud nodes should be registered with the ironic service running in the seed hosts `bifrost_deploy` container. The node inventory can be viewed by executing the following on the seed:

#### Note

Example shows the commands when using Docker as the container engine. If using Podman, simply change `docker` for `sudo podman` in the command.

```
$ docker exec -it bifrost_deploy bash
(bifrost_deploy) $ export OS_CLOUD=bifrost
(bifrost_deploy) $ baremetal node list
```

In order to interact with these nodes using Kayobe, run the following command to add them to the Kayobe and Kolla-Ansible inventories:

```
(kayobe) $ kayobe overcloud inventory discover
```

#### See also

This [blog post](#) provides a case study of the discovery process, including automatically naming Ironic nodes via switch port descriptions, Ironic Inspector and LLDP.

## Saving Hardware Introspection Data

If ironic inspector is in use on the seed host, introspection data will be stored in the local nginx service. This data may be saved to the control host:

```
(kayobe) $ kayobe overcloud introspection data save
```

`--output-dir` may be used to specify the directory in which introspection data files will be saved. `--output-format` may be used to set the format of the files.

## BIOS and RAID Configuration

### Note

BIOS and RAID configuration may require one or more power cycles of the hardware to complete the operation. These will be performed automatically.

### Note

Currently, BIOS and RAID configuration of overcloud hosts is supported for Dell servers only.

Configuration of BIOS settings and RAID volumes is currently performed out of band as a separate task from hardware provisioning. To configure the BIOS and RAID:

```
(kayobe) $ kayobe overcloud bios raid configure
```

After configuring the nodes RAID volumes it may be necessary to perform hardware inspection of the nodes to reconfigure the ironic nodes scheduling properties and root device hints. To perform manual hardware inspection:

```
(kayobe) $ kayobe overcloud hardware inspect
```

There are currently a few limitations to configuring BIOS and RAID:

- The Ansible control host must be able to access the BMCs of the servers being configured.
- The Ansible control host must have the `python-dracclient` Python module available to the Python interpreter used by Ansible. The path to the Python interpreter is configured via `ansible_python_interpreter`.

## Provisioning

### Note

There is a [cloud-init issue](#) which prevents Ironic nodes without names from being accessed via SSH after provisioning. To avoid this issue, ensure that all Ironic nodes in the Bifrost inventory are named. This may be achieved via [autodiscovery](#), or manually, e.g. from the seed:

### Note

Example shows the commands when using Docker as the container engine. If using Podman, simply change `docker` for `sudo podman` in the command.

```
$ docker exec -it bifrost_deploy bash
(bifrost_deploy) $ export OS_CLOUD=bifrost
(bifrost_deploy) $ baremetal node set ee77b4ca-8860-4003-a18f-
↪ b00d01295bda --name controller0
```

Provisioning of the overcloud is performed by the ironic service running in the bifrost container on the

seed. To provision the overcloud nodes:

```
(kayobe) $ kayobe overcloud provision
```

After this command has completed the overcloud nodes should have been provisioned with an OS image. The command will wait for the nodes to become active in ironic and accessible via SSH.

## Host Configuration

To configure the overcloud hosts OS:

```
(kayobe) $ kayobe overcloud host configure
```

### Note

If the controller hosts use disks that have been in use in a previous installation, it may be necessary to wipe partition and LVM data from those disks. To wipe all disks that are not mounted during host configuration:

```
(kayobe) $ kayobe overcloud host configure --wipe-disks
```

### See also

Information on configuration of hosts is available [here](#).

## Building Container Images

### Note

It is possible to use prebuilt container images from an image registry such as Quay.io. In this case, this step can be skipped.

In some cases it may be necessary to build images locally either to apply local image customisation or to use a downstream version of kolla. Images are built by hosts in the `container-image-builders` group, which by default includes the seed. If no seed host is in use, for example in an all-in-one controller development environment, this group may be modified to cause containers to be built on the controllers.

To build container images:

```
(kayobe) $ kayobe overcloud container image build
```

It is possible to build a specific set of images by supplying one or more image name regular expressions:

```
(kayobe) $ kayobe overcloud container image build ironic- nova-api
```

When your environment uses OVN, OVS images will not be built. If you want to build all Neutron images at the same time, extra variable `kolla_build_neutron_ovs` needs to be set to `true`:

```
(kayobe) $ kayobe overcloud container image build -e kolla_build_neutron_
↪ ovs=true
```

In order to push images to a registry after they are built, add the `--push` argument.

#### See also

Information on configuration of Kolla for building container images is available [here](#).

## Pulling Container Images

#### Note

It is possible to build container images locally avoiding the need for an image registry such as Quay.io. In this case, this step can be skipped.

In most cases suitable prebuilt kolla images will be available on Quay.io. The [openstack.kolla organisation](#) provides image repositories suitable for use with kayobe and will be used by default. To pull images from the configured image registry:

```
(kayobe) $ kayobe overcloud container image pull
```

## Building Deployment Images

#### Note

It is possible to use prebuilt deployment images. In this case, this step can be skipped.

#### Note

Deployment images are only required for the overcloud when Ironic is in use. Otherwise, this step can be skipped.

It is possible to use prebuilt deployment images from the [OpenStack hosted tarballs](#) or another source. In some cases it may be necessary to build images locally either to apply local image customisation or to use a downstream version of Ironic Python Agent (IPA). In order to build IPA images, the `ipa_build_images` variable should be set to `True`.

To build images locally:

```
(kayobe) $ kayobe overcloud deployment image build
```

If images have been built previously, they will not be rebuilt. To force rebuilding images, use the `--force-rebuild` argument.

#### See also

See [here](#) for information on how to configure the IPA image build process.

## Building Swift Rings

### Note

This section can be skipped if Swift is not in use.

Swift uses ring files to control placement of data across a cluster. These files can be generated automatically using the following command:

```
(kayobe) $ kayobe overcloud swift rings generate
```

## Deploying Containerised Services

To deploy the overcloud services in containers:

```
(kayobe) $ kayobe overcloud service deploy
```

Once this command has completed the overcloud nodes should have OpenStack services running in Docker containers.

### See also

Information on configuration of Kolla Ansible is available [here](#).

## Interacting with the Control Plane

Kolla-ansible writes out an environment file that can be used to access the OpenStack admin endpoints as the admin user:

```
$ source ${KOLLA_CONFIG_PATH:-/etc/kolla}/admin-openrc.sh
```

Kayobe also generates an environment file that can be used to access the OpenStack public endpoints as the admin user which may be required if the admin endpoints are not available from the Ansible control host:

```
$ source ${KOLLA_CONFIG_PATH:-/etc/kolla}/public-openrc.sh
```

## Performing Post-deployment Configuration

To perform post deployment configuration of the overcloud services:

```
(kayobe) $ source ${KOLLA_CONFIG_PATH:-/etc/kolla}/admin-openrc.sh
(kayobe) $ kayobe overcloud post configure
```

This will perform the following tasks:

- Register Ironic Python Agent (IPA) images with glance
- Register introspection rules with ironic inspector
- Register a provisioning network and subnet with neutron
- Configure Grafana organisations, dashboards and datasources

## 3.8 Upgrading

This section describes how to upgrade from one OpenStack release to another.

### 3.8.1 Preparation

Before you start, be sure to back up any local changes, configuration, and data.

#### Migrating Kayobe Configuration

Kayobe configuration options may be changed between releases of kayobe. Ensure that all site local configuration is migrated to the target version format. If using the [kayobe-config](#) git repository to manage local configuration, this process can be managed via git. For example, to fetch version 1.0.0 of the configuration from the `origin` remote and merge it into the current branch:

```
$ git fetch origin 1.0.0
$ git merge 1.0.0
```

The configuration should be manually inspected after the merge to ensure that it is correct. Any new configuration options may be set at this point. In particular, the following options may need to be changed if not using their default values:

- `kolla_openstack_release`
- `kolla_tag`
- `kolla_sources`
- `kolla_build_blocks`
- `kolla_build_customizations`

Once the configuration has been migrated, it is possible to view the global variables for all hosts:

```
(kayobe) $ kayobe configuration dump
```

The output of this command is a JSON object mapping hosts to their configuration. The output of the command may be restricted using the `--host`, `--hosts`, `--var-name` and `--dump-facts` options.

If using the `kayobe-env` environment file in `kayobe-config`, this should also be inspected for changes and modified to suit the local ansible control host environment if necessary. When ready, source the environment file:

```
$ source kayobe-env
```

The [Kayobe release notes](#) provide information on each new release. In particular, the *Upgrade Notes* and *Deprecation Notes* sections provide information that might affect the configuration migration.

All changes made to the configuration should be committed and pushed to the hosting git repository.

### 3.8.2 Updating Kayobe Configuration

Ensure that the Kayobe configuration is checked out at the required commit.

First, ensure that there are no uncommitted local changes to the repository:

```
$ cd <base_path>/src/kayobe-config/
$ git status
```

Pull down changes from the hosting repository. For example, to fetch changes from the `master` branch of the `origin` remote:

```
$ git checkout master
$ git pull --ff-only origin master
```

Adjust this procedure to suit your environment.

### 3.8.3 Upgrading Kayobe

If a new, suitable version of kayobe is available, it should be installed. As described in [Installation](#), Kayobe can be installed via the released Python packages on PyPI, or from source. Installation from a Python package is supported from Kayobe 5.0.0 onwards.

Kayobe supports skip-level (SLURP) upgrades, see the [Kolla Ansible docs](#) for details.

#### Upgrading from PyPI

This section describes how to upgrade Kayobe from a Python package in a virtualenv. This is supported from Kayobe 5.0.0 onwards.

Ensure that the virtualenv is activated:

```
$ source <base_path>/venvs/kayobe/bin/activate
```

Update the pip package:

```
(kayobe) $ pip install -U pip
```

#### Note

When updating Ansible above version 2.9.x, first uninstall it with `pip uninstall ansible`. A newer version will be installed with the next command, as a Kayobe dependency. If Ansible 2.10.x was installed and you want to use a newer version, also uninstall the `ansible-base` package with `pip uninstall ansible-base`.

If upgrading to the latest version of Kayobe:

```
(kayobe) $ pip install -U kayobe
```

Alternatively, to upgrade to a specific release of Kayobe:

```
(kayobe) $ pip install kayobe==5.0.0
```

#### Upgrading from source

This section describes how to install Kayobe from source in a virtualenv.

First, check out the required version of the Kayobe source code. This may be done by pulling down the new version from `opendev.org`. Make sure that any local changes to kayobe are committed and merged with the new upstream code as necessary. For example, to pull version 5.0.0 from the `origin` remote:

```
$ cd <base_path>/src/kayobe
$ git pull origin 5.0.0
```

Ensure that the virtualenv is activated:

```
$ source <base_path>/venvs/kayobe/bin/activate
```

Update the pip package:

```
(kayobe) $ pip install -U pip
```

If using a non-editable install of Kayobe:

```
(kayobe) $ cd <base_path>/src/kayobe
(kayobe) $ pip install -U .
```

Alternatively, if using an editable install of Kayobe (version 5.0.0 onwards, see [Editable source installation](#) for details):

```
(kayobe) $ cd <base_path>/src/kayobe
(kayobe) $ pip install -U -e .
```

### 3.8.4 Upgrading the Ansible Control Host

Before starting the upgrade we must upgrade the Ansible control host. Tasks performed here include:

- Install updated Ansible role dependencies from Ansible Galaxy.
- Generate an SSH key if necessary and add it to the current users authorised keys.
- Upgrade Kolla Ansible locally to the configured version.

To upgrade the Ansible control host:

```
(kayobe) $ kayobe control host upgrade
```

### 3.8.5 Upgrading the Seed Hypervisor

Currently, upgrading the seed hypervisor services is not supported. It may however be necessary to upgrade host packages and some host services.

#### Upgrading Host Packages

Prior to upgrading the seed hypervisor, it may be desirable to upgrade system packages on the seed hypervisor host.

To update all eligible packages, use \*, escaping if necessary:

```
(kayobe) $ kayobe seed hypervisor host package update --packages "*" --
```

To only install updates that have been marked security related:

```
(kayobe) $ kayobe seed hypervisor host package update --packages "*" --
↪security
```

## Upgrading Host Services

It may be necessary to upgrade some host services:

```
(kayobe) $ kayobe seed hypervisor host upgrade
```

Note that this will not perform full configuration of the host, and will instead perform a targeted upgrade of specific services where necessary.

### 3.8.6 Upgrading the Seed

The seed services are upgraded in two steps. First, new container images should be obtained either by building them locally or pulling them from an image registry. Second, the seed services should be replaced with new containers created from the new container images.

## Upgrading Host Packages

Prior to upgrading the seed, it may be desirable to upgrade system packages on the seed host.

To update all eligible packages, use `*`, escaping if necessary:

```
(kayobe) $ kayobe seed host package update --packages "*"
```

To only install updates that have been marked security related:

```
(kayobe) $ kayobe seed host package update --packages "*" --security
```

Note that these commands do not affect packages installed in containers, only those installed on the host.

## Building IroniC Deployment Images

### Note

It is possible to use prebuilt deployment images. In this case, this step can be skipped.

It is possible to use prebuilt deployment images from the [OpenStack hosted tarballs](#) or another source. In some cases it may be necessary to build images locally either to apply local image customisation or to use a downstream version of IroniC Python Agent (IPA). In order to build IPA images, the `ipa_build_images` variable should be set to `True`. To build images locally:

```
(kayobe) $ kayobe seed deployment image build
```

To overwrite existing images, add the `--force-rebuild` argument.

## Upgrading Host Services

It may be necessary to upgrade some host services:

```
(kayobe) $ kayobe seed host upgrade
```

Note that this will not perform full configuration of the host, and will instead perform a targeted upgrade of specific services where necessary.

## Building Container Images

### Note

It is possible to use prebuilt container images from an image registry such as Quay.io. In this case, this step can be skipped.

In some cases it may be necessary to build images locally either to apply local image customisation or to use a downstream version of kolla. To build images locally:

```
(kayobe) $ kayobe seed container image build
```

In order to push images to a registry after they are built, add the `--push` argument.

## Upgrading Containerised Services

Containerised seed services may be upgraded by replacing existing containers with new containers using updated images which have been pulled from a registry or built locally.

To upgrade the containerised seed services:

```
(kayobe) $ kayobe seed service upgrade
```

### 3.8.7 Upgrading the Overcloud

The overcloud services are upgraded in two steps. First, new container images should be obtained either by building them locally or pulling them from an image registry. Second, the overcloud services should be replaced with new containers created from the new container images.

## Upgrading Host Packages

Prior to upgrading the OpenStack control plane, it may be desirable to upgrade system packages on the overcloud hosts.

To update all eligible packages, use `*`, escaping if necessary:

```
(kayobe) $ kayobe overcloud host package update --packages "*"
```

To only install updates that have been marked security related:

```
(kayobe) $ kayobe overcloud host package update --packages "*" --security
```

Note that these commands do not affect packages installed in containers, only those installed on the host.

## Upgrading Host Services

Prior to upgrading the OpenStack control plane, the overcloud host services should be upgraded:

```
(kayobe) $ kayobe overcloud host upgrade
```

Note that this will not perform full configuration of the host, and will instead perform a targeted upgrade of specific services where necessary.

## Building Ironic Deployment Images

### Note

It is possible to use prebuilt deployment images. In this case, this step can be skipped.

It is possible to use prebuilt deployment images from the [OpenStack hosted tarballs](#) or another source. In some cases it may be necessary to build images locally either to apply local image customisation or to use a downstream version of Ironic Python Agent (IPA). In order to build IPA images, the `ipa_build_images` variable should be set to `True`. To build images locally:

```
(kayobe) $ kayobe overcloud deployment image build
```

To overwrite existing images, add the `--force-rebuild` argument.

## Upgrading Ironic Deployment Images

Prior to upgrading the OpenStack control plane you should upgrade the deployment images. If you are using prebuilt images, update the following variables in `etc/kayobe/ipa.yml` accordingly:

- `ipa_kernel_upstream_url`
- `ipa_kernel_checksum_url`
- `ipa_kernel_checksum_algorithm`
- `ipa_ramdisk_upstream_url`
- `ipa_ramdisk_checksum_url`
- `ipa_ramdisk_checksum_algorithm`

Alternatively, you can update the files that the URLs point to. If building the images locally, follow the process outlined in [Building Ironic Deployment Images](#).

To get Ironic to use an updated set of overcloud deployment images, you can run:

```
(kayobe) $ kayobe baremetal compute update deployment image
```

This will register the images in Glance and update the `deploy_ramdisk` and `deploy_kernel` properties of the Ironic nodes.

Before rolling out the update to all nodes, it can be useful to test the image on a limited subset. To do this, you can use the `baremetal-compute-limit` option. See [Update Deployment Image](#) for more details.

## Building Container Images

### Note

It is possible to use prebuilt container images from an image registry such as Quay.io. In this case, this step can be skipped.

In some cases it may be necessary to build images locally either to apply local image customisation or to use a downstream version of kolla. To build images locally:

```
(kayobe) $ kayobe overcloud container image build
```

It is possible to build a specific set of images by supplying one or more image name regular expressions:

```
(kayobe) $ kayobe overcloud container image build ironic- nova-api
```

In order to push images to a registry after they are built, add the `--push` argument.

## Pulling Container Images

### Note

It is possible to build container images locally avoiding the need for an image registry such as Quay.io. In this case, this step can be skipped.

In most cases suitable prebuilt kolla images will be available on Quay.io. The [openstack.kolla organisation](#) provides image repositories suitable for use with kayobe and will be used by default. To pull images from the configured image registry:

```
(kayobe) $ kayobe overcloud container image pull
```

## Saving Overcloud Service Configuration

It is often useful to be able to save the configuration of the control plane services for inspection or comparison with another configuration set prior to a reconfiguration or upgrade. This command will gather and save the control plane configuration for all hosts to the Ansible control host:

```
(kayobe) $ kayobe overcloud service configuration save
```

The default location for the saved configuration is `$PWD/overcloud-config`, but this can be changed via the `output-dir` argument. To gather configuration from a directory other than the default `/etc/kolla`, use the `node-config-dir` argument.

## Generating Overcloud Service Configuration

Prior to deploying, reconfiguring, or upgrading a control plane, it may be useful to generate the configuration that will be applied, without actually applying it to the running containers. The configuration should typically be generated in a directory other than the default configuration directory of `/etc/kolla`, to avoid overwriting the active configuration:

```
(kayobe) $ kayobe overcloud service configuration generate --node-config-dir /  
↪path/to/generated/config
```

The configuration will be generated remotely on the overcloud hosts in the specified directory, with one subdirectory per container. This command may be followed by `kayobe overcloud service configuration save` to gather the generated configuration to the Ansible control host.

## Upgrading Containerised Services

Containerised control plane services may be upgraded by replacing existing containers with new containers using updated images which have been pulled from a registry or built locally.

To upgrade the containerised control plane services:

```
(kayobe) $ kayobe overcloud service upgrade
```

It is possible to specify tags for Kayobe and/or kolla-ansible to restrict the scope of the upgrade:

```
(kayobe) $ kayobe overcloud service upgrade --tags config --kolla-tags ↵
↵keystone
```

## 3.9 Administration

This section describes how to use kayobe to simplify post-deployment administrative tasks.

### 3.9.1 General Administration

#### Updating the Control Host

There are several pieces of software and configuration that must be installed and synchronised on the Ansible Control host:

- Kayobe configuration
- Kayobe Python package
- Ansible Galaxy roles
- Kolla Ansible Python package

A change to the configuration may require updating the Kolla Ansible Python package. Updating the Kayobe Python package may require updating the Ansible Galaxy roles. Its not always easy to know which of these are required, so the simplest option is to apply all of the following steps when any of the above are changed.

1. *Update Kayobe configuration* to the required commit
2. *Upgrade the Kayobe Python package* to the required version
3. *Upgrade the Ansible control host* to synchronise the Ansible Galaxy roles and Kolla Ansible Python package.

#### Running Kayobe Playbooks on Demand

In some situations it may be necessary to run an individual Kayobe playbook. Playbooks are stored in `<kayobe repo>/ansible/*.yaml`. To run an arbitrary Kayobe playbook:

```
(kayobe) $ kayobe playbook run <playbook> [<playbook>]
```

## Running Kolla-ansible Commands

To execute a kolla-ansible command:

```
(kayobe) $ kayobe kolla ansible run <command>
```

## Dumping Kayobe Configuration

The Ansible configuration space is quite large, and it can be hard to determine the final values of Ansible variables. We can use Kayobes `configuration dump` command to view individual variables or the variables for one or more hosts. To dump Kayobe configuration for one or more hosts:

```
(kayobe) $ kayobe configuration dump
```

The output is a JSON-formatted object mapping hosts to their hostvars.

We can use the `--var-name` argument to inspect a particular variable or the `--host` or `--hosts` arguments to view a variable or variables for a specific host or set of hosts.

## Checking Network Connectivity

In complex networking environments it can be useful to be able to automatically check network connectivity and diagnose networking issues. To perform some simple connectivity checks:

```
(kayobe) $ kayobe network connectivity check
```

Note that this will run on the seed, seed hypervisor, and overcloud hosts. If any of these hosts are not expected to be active (e.g. prior to overcloud deployment), the set of target hosts may be limited using the `--limit` argument.

These checks will attempt to ping the external IP address `8.8.8.8` and external hostname `google.com`. They can be configured with the `nc_external_ip` and `nc_external_hostname` variables in `$KAYOBE_CONFIG_PATH/networks.yml`.

## 3.9.2 Seed Administration

### Deprovisioning The Seed VM

#### Note

This step will destroy the seed VM and its data volumes.

To deprovision the seed VM:

```
(kayobe) $ kayobe seed vm deprovision
```

### Destroying all services on the seed

#### Warning

This step will destroy all containers, container images, and volumes that were deployed by Kayobe and Kolla. To destroy volumes and images associated with *custom containers*, you must configure the

`post_destroy` and `pre_destroy` hooks to do the clean up manually as Kayobe will not automatically clean these up. It is generally only advised to run this command when you have no important data on the system.

To destroy the seed services:

```
(kayobe) $ kayobe seed service destroy --yes-i-really-really-mean-it
```

This can optionally be used with a tag:

```
(kayobe) $ kayobe seed service destroy --yes-i-really-really-mean-it -kt none ↵
↪ -t docker-registry
```

Care must be taken to set both kayobe and kolla tags to avoid accidentally destroying other services.

## Updating Packages

It is possible to update packages on the seed host.

### Package Repositories

If using custom DNF package repositories on CentOS or Rocky, it may be necessary to update these prior to running a package update. To do this, update the configuration in `${KAYOBE_CONFIG_PATH}/dnf.yml` and run the following command:

```
(kayobe) $ kayobe seed host configure --tags dnf --kolla-tags none
```

### Package Update

To update one or more packages:

```
(kayobe) $ kayobe seed host package update --packages <package1>,<package2>
```

To update all eligible packages, use `*`, escaping if necessary:

```
(kayobe) $ kayobe seed host package update --packages "*"
```

To only install updates that have been marked security related:

```
(kayobe) $ kayobe seed host package update --packages "*" --security
```

Note that these commands do not affect packages installed in containers, only those installed on the host.

Packages can also be updated on the seed hypervisor host, if one is in use:

```
(kayobe) $ kayobe seed hypervisor package update --packages <package1>,
↪ <package2>
```

## Kernel Updates

If the kernel has been updated, you will probably want to reboot the seed host to boot into the new kernel. This can be done using a command such as the following:

```
(kayobe) $ kayobe seed host command run --command "shutdown -r" --become
```

## Examining the Bifrost Container

The seed host runs various services required for a standalone Ironic deployment. These all run in a single `bifrost_deploy` container.

It can often be helpful to execute a shell in the bifrost container for diagnosing operational issues:

### Note

Examples show the commands when using Docker as the container engine. If using Podman, simply change `docker` for `sudo podman` in the command.

```
$ docker exec -it bifrost_deploy bash
```

Services are run via Systemd:

```
(bifrost_deploy) systemctl
```

Logs are stored in `/var/log/kolla/`, which is mounted to the `kolla_logs` Docker volume.

## Accessing the Seed Services

The Ironic and Ironic inspector APIs can be accessed via the `baremetal` command line interface:

```
(bifrost_deploy) $ export OS_CLOUD=bifrost
(bifrost_deploy) $ baremetal node list
(bifrost_deploy) $ baremetal introspection list
```

## Backup & Restore

There are two main approaches to backing up and restoring data on the seed. A backup may be taken of the Ironic databases. Alternatively, a Virtual Machine backup may be used if running the seed services in a VM. The former will consume less storage. Virtual Machine backups are not yet covered here, neither is scheduling of backups. Any backup and restore procedure should be tested in advance.

### Database Backup & Restore

A backup may be taken of the database, using one of the many tools that exist for backing up MariaDB databases.

A simple approach that should work for the typically modestly sized seed database is `mysqldump`. The following commands should all be executed on the seed.

## Backup

### Note

Examples show the commands when using Docker as the container engine. If using Podman, simply change `docker` for `sudo podman` in the command.

It should be safe to keep services running during the backup, but for maximum safety they may optionally be stopped:

```
docker exec -it bifrost_deploy systemctl stop ironic ironic-inspector
```

Then, to perform the backup:

```
docker exec -it bifrost_deploy \
mysqldump --all-databases --single-transaction --routines --triggers > seed-
↪ backup.sql
```

If the services were stopped prior to the backup, start them again:

```
docker exec -it bifrost_deploy systemctl start ironic ironic-inspector
```

## Restore

### Note

Examples show the commands when using Docker as the container engine. If using Podman, simply change `docker` for `sudo podman` in the command.

Prior to restoring the database, the Ironic and Ironic Inspector services should be stopped:

```
docker exec -it bifrost_deploy systemctl stop ironic ironic-inspector
```

The database may then safely be restored:

```
docker exec -i bifrost_deploy \
mysql < seed-backup.sql
```

Finally, start the Ironic and Ironic Inspector services again:

```
docker exec -it bifrost_deploy systemctl start ironic ironic-inspector
```

## Running Commands

It is possible to run a command on the seed host:

```
(kayobe) $ kayobe seed host command run --command "<command>"
```

For example:

```
(kayobe) $ kayobe seed host command run --command "service docker restart"
```

Commands can also be run on the seed hypervisor host, if one is in use:

```
(kayobe) $ kayobe seed hypervisor host command run --command "<command>"
```

To execute the command with root privileges, add the `--become` argument. Adding the `--verbose` argument allows the output of the command to be seen.

### 3.9.3 Infra VM Administration

#### Deprovisioning Infrastructure VMs

##### Note

This step will destroy the infrastructure VMs and associated data volumes. Make sure you backup any data you want to keep.

To deprovision all VMs:

```
(kayobe) $ kayobe infra vm deprovision
```

This can be limited to a subset of the nodes using the `--limit` option:

```
(kayobe) $ kayobe infra vm deprovision --limit example-vm-1
```

#### Updating Packages

It is possible to update packages on the infrastructure VMs.

#### Package Repositories

If using custom DNF package repositories on CentOS or Rocky, it may be necessary to update these prior to running a package update. To do this, update the configuration in `${KAYOBE_CONFIG_PATH}/dnf.yml` and run the following command:

```
(kayobe) $ kayobe infra vm host configure --tags dnf
```

#### Package Update

To update one or more packages:

```
(kayobe) $ kayobe infra vm host package update --packages <package1>,  
↪<package2>
```

To update all eligible packages, use `*`, escaping if necessary:

```
(kayobe) $ kayobe infra vm host package update --packages "*" 
```

To only install updates that have been marked security related:

```
(kayobe) $ kayobe infra vm host package update --packages "*" --security
```

Note that these commands do not affect packages installed in containers, only those installed on the host.

## Kernel Updates

If the kernel has been updated, you will probably want to reboot the host to boot into the new kernel. This can be done using a command such as the following:

```
(kayobe) $ kayobe infra vm host command run --command "shutdown -r" --become
```

## Running Commands

It is possible to run a command on the host:

```
(kayobe) $ kayobe infra vm host command run --command "<command>"
```

For example:

```
(kayobe) $ kayobe infra vm host command run --command "service docker restart"
```

Commands can also be run on the seed hypervisor host, if one is in use:

```
(kayobe) $ kayobe seed hypervisor host command run --command "<command>"
```

To execute the command with root privileges, add the `--become` argument. Adding the `--verbose` argument allows the output of the command to be seen.

## 3.9.4 Overcloud Administration

### Updating Packages

It is possible to update packages on the overcloud hosts.

### Package Repositories

If using custom DNF package repositories on CentOS or Rocky, it may be necessary to update these prior to running a package update. To do this, update the configuration in `${KAYOBE_CONFIG_PATH}/dnf.yml` and run the following command:

```
(kayobe) $ kayobe overcloud host configure --tags dnf --kolla-tags none
```

### Package Update

To update one or more packages:

```
(kayobe) $ kayobe overcloud host package update --packages <package1>,  
↪<package2>
```

To update all eligible packages, use `*`, escaping if necessary:

```
(kayobe) $ kayobe overcloud host package update --packages "*"

```

To only install updates that have been marked security related:

```
(kayobe) $ kayobe overcloud host package update --packages "*" --security

```

Note that these commands do not affect packages installed in containers, only those installed on the host.

## Kernel Updates

If the kernel has been updated, you will probably want to reboot the hosts to boot into the new kernel. This can be done using a command such as the following:

```
(kayobe) $ kayobe overcloud host command run --command "shutdown -r" --become

```

It is normally best to apply this to control plane hosts in batches to avoid clustered services from losing quorum. This can be achieved using the `--limit` argument, and ensuring services are fully up after rebooting before proceeding with the next batch.

## Running Commands

It is possible to run a command on the overcloud hosts:

```
(kayobe) $ kayobe overcloud host command run --command "<command>"

```

For example:

```
(kayobe) $ kayobe overcloud host command run --command "service docker restart"
↪

```

To execute the command with root privileges, add the `--become` argument. Adding the `--verbose` argument allows the output of the command to be seen.

## Reconfiguring Containerised Services

When configuration is changed, it is necessary to apply these changes across the system in an automated manner. To reconfigure the overcloud, first make any changes required to the configuration on the Ansible control host. Next, run the following command:

```
(kayobe) $ kayobe overcloud service reconfigure

```

In case not all services configuration have been modified, performance can be improved by specifying Ansible tags to limit the tasks run in kayobe and/or kolla-ansible playbooks. This may require knowledge of the inner workings of these tools but in general, kolla-ansible tags the play used to configure each service by the name of that service. For example: `nova`, `neutron` or `ironic`. Use `-t` or `--tags` to specify kayobe tags and `-kt` or `--kolla-tags` to specify kolla-ansible tags. For example:

```
(kayobe) $ kayobe overcloud service reconfigure --tags config --kolla-tags ↪
↪nova,ironic

```

## Deploying Updated Container Images

A common task is to deploy updated container images, without configuration changes. This might be to roll out an updated container OS or to pick up some package updates. This should be faster than a full deployment or reconfiguration.

To deploy updated container images:

```
(kayobe) $ kayobe overcloud service deploy containers
```

Note that if there are configuration changes, these will not be applied using this command so if in doubt, use a normal `kayobe overcloud service deploy`.

In case not all services containers have been modified, performance can be improved by specifying Ansible tags to limit the tasks run in kayobe and/or kolla-ansible playbooks. This may require knowledge of the inner workings of these tools but in general, kolla-ansible tags the play used to configure each service by the name of that service. For example: `nova`, `neutron` or `ironic`. Use `-t` or `--tags` to specify kayobe tags and `-kt` or `--kolla-tags` to specify kolla-ansible tags. For example:

```
(kayobe) $ kayobe overcloud service deploy containers --kolla-tags nova,ironic
```

## Upgrading Containerised Services

Containerised control plane services may be upgraded by replacing existing containers with new containers using updated images which have been pulled from a registry or built locally. If using an updated version of Kayobe or upgrading from one release of OpenStack to another, be sure to follow the [kayobe upgrade guide](#). It may be necessary to upgrade one or more services within a release, for example to apply a patch or minor release.

To upgrade the containerised control plane services:

```
(kayobe) $ kayobe overcloud service upgrade
```

As for the reconfiguration command, it is possible to specify tags for Kayobe and/or kolla-ansible:

```
(kayobe) $ kayobe overcloud service upgrade --tags config --kolla-tags ↵
↵keystone
```

## Running Prechecks

Sometimes it may be useful to run prechecks without deploying services:

```
(kayobe) $ kayobe overcloud service prechecks
```

As for other similar commands, it is possible to specify tags for Kayobe and/or kolla-ansible:

```
(kayobe) $ kayobe overcloud service upgrade --tags config --kolla-tags ↵
↵keystone
```

## Stopping the Overcloud Services

#### Note

This step will stop all containers on the overcloud hosts.

To stop the overcloud services:

```
(kayobe) $ kayobe overcloud service stop --yes-i-really-really-mean-it
```

It should be noted that this state is persistent - containers will remain stopped after a reboot of the host on which they are running.

It is possible to limit the operation to particular hosts via `--kolla-limit`, or to particular services via `--kolla-tags`. It is also possible to avoid stopping the common containers via `--kolla-skip-tags common`. For example:

```
(kayobe) $ kayobe overcloud service stop kolla-tags glance,nova kolla-skip-tags common
```

## Destroying the Overcloud Services

#### Note

This step will destroy all containers, container images, volumes and data on the overcloud hosts.

To destroy the overcloud services:

```
(kayobe) $ kayobe overcloud service destroy --yes-i-really-really-mean-it
```

## Deprovisioning The Cloud

#### Note

This step will power down the overcloud hosts and delete their nodes instance state from the seeds ironic service. This command will print a list of hosts which will be deprovisioned, you must type `yes` to confirm. To automatically confirm, pass the arguments `-e confirm_deprovision=yes`.

To deprovision the overcloud:

```
(kayobe) $ kayobe overcloud deprovision
```

## Saving Overcloud Service Configuration

It is often useful to be able to save the configuration of the control plane services for inspection or comparison with another configuration set prior to a reconfiguration or upgrade. This command will gather and save the control plane configuration for all hosts to the Ansible control host:

```
(kayobe) $ kayobe overcloud service configuration save
```

The default location for the saved configuration is `$PWD/overcloud-config`, but this can be changed via the `output-dir` argument. To gather configuration from a directory other than the default `/etc/kolla`, use the `node-config-dir` argument.

## Generating Overcloud Service Configuration

Prior to deploying, reconfiguring, or upgrading a control plane, it may be useful to generate the configuration that will be applied, without actually applying it to the running containers. The configuration should typically be generated in a directory other than the default configuration directory of `/etc/kolla`, to avoid overwriting the active configuration:

```
(kayobe) $ kayobe overcloud service configuration generate --node-config-dir /
↳ path/to/generated/config
```

The configuration will be generated remotely on the overcloud hosts in the specified directory, with one subdirectory per container. This command may be followed by `kayobe overcloud service configuration save` to gather the generated configuration to the Ansible control host.

## Validating Overcloud Service Configuration

Issues can arise in Kolla Ansible deployments when incorrect options are used in configuration files. This is because OpenStack services will ignore unknown options. It is also important to keep on top of deprecated options that may be removed in the future. The `oslo-config-validator` can be used to check both of these. This command will run it on the OpenStack control plane services:

```
(kayobe) $ kayobe overcloud service configuration validate --output-dir /path/
↳ to/save/results
```

## Performing Database Backups

Database backups can be performed using the underlying support in Kolla Ansible.

In order to enable backups, enable Mariabackup in `{KAYOBE_CONFIG_PATH}/kolla.yml`:

```
kolla_enable_mariabackup: true
```

To apply this change, use the `kayobe overcloud service reconfigure` command.

To perform a full backup, run the following command:

```
kayobe overcloud database backup
```

Or to perform an incremental backup, run the following command:

```
kayobe overcloud database backup --incremental
```

Further information on backing up and restoring the database is available in the [Kolla Ansible documentation](#).

## Performing Database Recovery

Recover a completely stopped MariaDB cluster using the underlying support in Kolla Ansible.

To perform recovery run the following command:

```
kayobe overcloud database recover
```

Or to perform recovery on specified host, run the following command:

```
kayobe overcloud database recover --force-recovery-host <host>
```

By default the underlying kolla-ansible will automatically determine which host to use, and this option should not be used.

## Gathering Facts

The following command may be used to gather facts for all overcloud hosts, for both Kayobe and Kolla Ansible:

```
kayobe overcloud facts gather
```

This may be useful to populate a fact cache in advance of other operations.

## 3.9.5 Baremetal Compute Node Management

When enrolling new hardware or performing maintenance, it can be useful to be able to manage many bare metal compute nodes simultaneously.

In all cases, commands are delegated to one of the controller hosts, and executed concurrently. Note that ansible forks configuration option, which defaults to 5, may limit the number of nodes configured concurrently.

By default these commands wait for the state transition to complete for each node. This behavior can be changed by overriding the variable `baremetal_compute_wait` via `-e baremetal_compute_wait=False`

## Register

This is an experimental workflow which acts as an alternative to enrolling nodes through inspection. Bare metal compute nodes can be registered in Ironic via Kayobe if defined in the Kayobe inventory. An example hosts file for group r1 is below:

```
[r1]
hv100 ipmi_address=1.2.3.4
...

[baremetal-compute:children]
r1
```

You should also define a `group_vars` file for this group containing the Ironic variables, this could be in `etc/kayobe/inventory/group_vars/r1/ironic_vars` or in the environment you are using.

```
ironic_driver: redfish

ironic_driver_info:
  redfish_system_id: "{{ ironic_redfish_system_id }}"
  redfish_address: "{{ ironic_redfish_address }}"
  redfish_username: "{{ ironic_redfish_username }}"
  redfish_password: "{{ ironic_redfish_password }}"
  redfish_verify_ca: "{{ ironic_redfish_verify_ca }}"
  ipmi_address: "{{ ipmi_address }}"
```

(continues on next page)

(continued from previous page)

```

ironic_properties:
  capabilities: "{{ ironic_capabilities }}"

ironic_resource_class: "example_resource_class"
ironic_redfish_system_id: "/redfish/v1/Systems/System.Embedded.1"
ironic_redfish_verify_ca: "{{ inspector_rule_var_redfish_verify_ca }}"
ironic_redfish_address: "{{ ipmi_address }}"
ironic_redfish_username: "{{ inspector_redfish_username }}"
ironic_redfish_password: "{{ inspector_redfish_password }}"
ironic_capabilities: "boot_option:local,boot_mode:uefi"

```

It is essential that the Ironic username and password match the BMC username and password for your nodes. If the username and password combination is not the same for the entire group you will need to adjust your configuration accordingly. The IPMI address should also match the BMC address for your node.

Once this has been completed you can begin enrolling the Ironic nodes:

```
(kayobe) $ kayobe baremetal compute register
```

Inspector is not used to discover nodes and no node inspection will take place on enrollment, nodes will automatically be placed into manageable state. To inspect, you should use `kayobe baremetal compute inspect` following enrollment.

## Manage

A node may need to be set to the manageable provision state in order to perform certain management operations, or when an enrolled node is transitioned into service. In order to manage a node, it must be in one of these states: `enroll`, `available`, `cleaning`, `clean failed`, `adopt failed` or `inspect failed`. To move the baremetal compute nodes to the manageable provision state:

```
(kayobe) $ kayobe baremetal compute manage
```

## Provide

In order for nodes to be scheduled by nova, they must be available. To move the baremetal compute nodes from the manageable state to the available provision state:

```
(kayobe) $ kayobe baremetal compute provide
```

## Inspect

Nodes must be in one of the following states: `manageable`, `inspect failed`, or `available`. To trigger hardware inspection on the baremetal compute nodes:

```
(kayobe) $ kayobe baremetal compute inspect
```

## Saving Hardware Introspection Data

Introspection data will be stored in the `nginx` service within the `inspection_store` container. This data may be saved to the control host:

```
(kayobe) $ kayobe baremetal compute introspection data save
```

`--output-dir` may be used to specify the directory in which introspection data files will be saved.  
`--output-format` may be used to set the format of the files.

## Rename

Once nodes have been discovered, it is helpful to associate them with a name to make them easier to work with. If you would like the nodes to be named according to their inventory host names, you can run the following command:

```
(kayobe) $ kayobe baremetal compute rename
```

This command will use the `ipmi_address` host variable from the inventory to map the inventory host name to the correct node.

## Update Deployment Image

When the overcloud deployment images have been rebuilt or there has been a change to one of the following variables:

- `ipa_kernel_upstream_url`
- `ipa_ramdisk_upstream_url`

either by changing the url, or if the image to which they point has been changed, you need to update the `deploy_ramdisk` and `deploy_kernel` properties on the Ironic nodes. To do this you can run:

```
(kayobe) $ kayobe baremetal compute update deployment image
```

You can optionally limit the nodes in which this affects by setting `baremetal-compute-limit`:

```
(kayobe) $ kayobe baremetal compute update deployment image --baremetal-  
↪compute-limit sand-6-1
```

which should take the form of an [ansible host pattern](#). This is matched against the Ironic node name.

## Ironic Serial Console

To access the baremetal nodes from within Horizon you need to enable the serial console. For this to work the you must set `kolla_enable_nova_serialconsole_proxy` to `true` in `etc/kayobe/kolla.yml`:

```
kolla_enable_nova_serialconsole_proxy: true
```

The console interface on the Ironic nodes is expected to be `ipmitool-socat`, you can check this with:

```
openstack baremetal node show <node_id> --fields console_interface
```

where `<node_id>` should be the UUID or name of the Ironic node you want to check.

If you have set `kolla_ironic_enabled_console_interfaces` in `etc/kayobe/ironic.yml`, it should include `ipmitool-socat` in the list of enabled interfaces.

The playbook to enable the serial console currently only works if the Ironic node name matches the inventory hostname.

Once these requirements have been satisfied, you can run:

```
(kayobe) $ kayobe baremetal compute serial console enable
```

This will reserve a TCP port for each node to use for the serial console interface. The allocations are stored in `${KAYOBE_CONFIG_PATH}/console-allocation.yml`. The current implementation uses a global pool, which is specified by `ironic_serial_console_tcp_pool_start` and `ironic_serial_console_tcp_pool_end`; these variables can be set in `etc/kayobe/ironic.yml`.

To disable the serial console you can use:

```
(kayobe) $ kayobe baremetal compute serial console disable
```

The port allocated for each node is retained and must be manually removed from `${KAYOBE_CONFIG_PATH}/console-allocation.yml` if you want it to be reused by another Ironic node with a different name.

You can optionally limit the nodes targeted by setting `baremetal-compute-limit`:

```
(kayobe) $ kayobe baremetal compute serial console enable --baremetal-compute-
↪limit sand-6-1
```

which should take the form of an [ansible host pattern](#).

### Serial console auto-enable

To enable the serial consoles automatically on kayobe overcloud post configure, you can set `ironic_serial_console_autoenable` in `etc/kayobe/ironic.yml`:

```
ironic_serial_console_autoenable: true
```

## 3.10 Resources

This section contains links to external Kayobe resources.

### 3.10.1 A Universe From Nothing

#### Note

The A Universe From Nothing deployment guide is intended for educational & testing purposes only. It is *not* production ready.

Originally created as a workshop, A Universe From Nothing is an example guide for the deployment of Kayobe on virtual hardware. You can find it on GitHub [here](#).

The repository contains a configuration suitable for deploying containerised OpenStack using Kolla, Ansible and Kayobe. The guide makes use of [Tenks](#) to provision a virtual baremetal environment running on a single hypervisor.

To complete the walkthrough you will require a baremetal or VM hypervisor running CentOS Stream 9, Rocky Linux 9 or Ubuntu Noble 24.04 (since Dalmatian 17.0.0) with at least 32GB RAM & 80GB disk space. Preparing the deployment can take some time - where possible it is beneficial to snapshot the hypervisor. We advise making a snapshot after creating the initial seed VM as this will make additional deployments significantly faster.

## 3.11 Advanced Documentation

### 3.11.1 Control Plane Service Placement

#### Note

This is an advanced topic and should only be attempted when familiar with kayobe and OpenStack.

The default configuration in kayobe places all control plane services on a single set of servers described as controllers. In some cases it may be necessary to introduce more than one server role into the control plane, and control which services are placed onto the different server roles.

#### Configuration

##### Overcloud Inventory Discovery

If using a seed host to enable discovery of the control plane services, it is necessary to configure how the discovered hosts map into kayobe groups. This is done using the `overcloud_group_hosts_map` variable, which maps names of kayobe groups to a list of the hosts to be added to that group.

This variable will be used during the command `kayobe overcloud inventory discover`. An inventory file will be generated in `${KAYOBE_CONFIG_PATH}/inventory/overcloud` with discovered hosts added to appropriate kayobe groups based on `overcloud_group_hosts_map`.

##### Kolla-ansible Inventory Mapping

Once hosts have been discovered and enrolled into the kayobe inventory, they must be added to the kolla-ansible inventory. This is done by mapping from top level kayobe groups to top level kolla-ansible groups using the `kolla_overcloud_inventory_top_level_group_map` variable. This variable maps from kolla-ansible groups to lists of kayobe groups, and variables to define for those groups in the kolla-ansible inventory.

##### Variables For Custom Server Roles

Certain variables must be defined for hosts in the overcloud group. For hosts in the controllers group, many variables are mapped to other variables with a `controller_` prefix in files under `ansible/inventory/group_vars/controllers/`. This is done in order that they may be set in a global extra variables file, typically `controllers.yml`, with defaults set in `ansible/inventory/group_vars/all/controllers`. A similar scheme is used for hosts in the monitoring group.

Table 3: Overcloud host variables

Variable	Purpose
<code>ansible_user</code>	Username with which to access the host via SSH.
<code>bootstrap_user</code>	Username with which to access the host before <code>ansible_user</code> is configured.
<code>lvm_groups</code>	List of LVM volume groups to configure. See <a href="#">mrlesmithjr.manage_lvm</a> role for format.
<code>mdadm_arrays</code>	List of software RAID arrays. See <a href="#">mrlesmithjr.mdadm</a> role for format.
<code>network_interface</code>	List of names of networks to which the host is connected.
<code>sysctl_parameters</code>	Dict of sysctl parameters to set.
<code>users</code>	List of users to create. See <a href="#">singleplatform-eng.users</a> role

If configuring BIOS and RAID via `kayobe overcloud bios raid configure`, the following variables should also be defined:

Table 4: Overcloud BIOS &amp; RAID host variables

Variable	Purpose
<code>bios_config</code>	Dict mapping BIOS configuration options to their required values. See <a href="#">stackhpc.drac</a> role for format.
<code>raid_config</code>	List of RAID virtual disks to configure. See <a href="#">stackhpc.drac</a> role for format.

These variables can be defined in inventory host or group variables files, under `${KAYOBE_CONFIG_PATH}/inventory/host_vars/<host>` or `${KAYOBE_CONFIG_PATH}/inventory/group_vars/<group>` respectively.

## Custom Kolla-ansible Inventories

As an advanced option, it is possible to fully customise the content of the kolla-ansible inventory, at various levels. To facilitate this, kayobe breaks the kolla-ansible inventory into three separate sections.

**Top level** groups define the roles of hosts, e.g. `controller` or `compute`, and it is to these groups that hosts are mapped directly.

**Components** define groups of services, e.g. `nova` or `ironic`, which are mapped to top level groups.

**Services** define single containers, e.g. `nova-compute` or `ironic-api`, which are mapped to components.

The default top level inventory is generated from `kolla_overcloud_inventory_top_level_group_map`. Kayobes component- and service-level inventory for kolla-ansible is static, and taken from the kolla-ansible example `multinode` inventory. The complete inventory is generated by concatenating these inventories.

Each level may be separately overridden by setting the following variables:

Table 5: Custom kolla-ansible inventory variables

Variable	Purpose
<code>kolla_overcloud_inventory_custom</code>	Overcloud inventory containing a mapping from top level groups to hosts.
<code>kolla_overcloud_inventory_custom</code>	Overcloud inventory containing a mapping from components to top level groups.
<code>kolla_overcloud_inventory_custom</code>	Overcloud inventory containing a mapping from services to components.
<code>kolla_overcloud_inventory_custom</code>	Full overcloud inventory contents.

## Examples

### Example 1: Adding Network Hosts

This example walks through the configuration that could be applied to enable the use of separate hosts for neutron network services and load balancing. The control plane consists of three controllers, `controller-[0-2]`, and two network hosts, `network-[0-1]`. All file paths are relative to `${KAYOBE_CONFIG_PATH}`.

First, we must make the network group separate from controllers:

Listing 187: `inventory/groups`

```
[controllers]
# Empty group to provide declaration of controllers group.

[network]
# Empty group to provide declaration of network group.
```

Then, we must map the hosts to kayobe groups.

Listing 188: `overcloud.yml`

```
overcloud_group_hosts_map:
  controllers:
    - controller-0
    - controller-1
    - controller-2
  network:
    - network-0
    - network-1
```

Next, we must map these groups to kolla-ansible groups.

Listing 189: `kolla.yml`

```
kolla_overcloud_inventory_top_level_group_map:
  control:
    groups:
      - controllers
  network:
```

(continues on next page)

(continued from previous page)

```
groups:
- network
```

Finally, we create a group variables file for hosts in the network group, providing the necessary variables for a control plane host.

Listing 190: inventory/group\_vars/network

```
ansible_user: "{{ kayobe_ansible_user }}"
bootstrap_user: "{{ controller_bootstrap_user }}"
lvm_groups: "{{ controller_lvm_groups }}"
mdadm_arrays: "{{ controller_mdadm_arrays }}"
network_interfaces: "{{ controller_network_host_network_interfaces }}"
sysctl_parameters: "{{ controller_sysctl_parameters }}"
users: "{{ controller_users }}"
```

Here we are using the controller-specific values for some of these variables, but they could equally be different.

## Example 2: Overriding the Kolla-ansible Inventory

This example shows how to override one or more sections of the kolla-ansible inventory. All file paths are relative to `${KAYOBE_CONFIG_PATH}`.

It is typically best to start with an inventory template taken from the Kayobe source code, and then customize it. The templates can be found in `ansible/roles/kolla-ansible/templates`, e.g. `components` template is `overcloud-components.j2`.

First, create a file containing the customised inventory section. We'll use the **components** section in this example.

Listing 191: kolla/inventory/overcloud-components.j2

```
[nova]
control

[ironic]
{% if kolla_enable_ironic | bool %}
control
{% endif %}

...
```

Next, we must configure kayobe to use this inventory template.

Listing 192: kolla.yml

```
kolla_overcloud_inventory_custom_components: "{{ lookup('template', kayobe_
→env_config_path ~ '/kolla/inventory/overcloud-components.j2') }}"
```

Here we use the `template` lookup plugin to render the Jinja2-formatted inventory template.

### Fine-grained placement

Kayobe has fairly coarse-grained default groups - `controller`, `compute`, etc, which work well in the majority of cases. Kolla Ansible allows much more fine-grained placement on a per-service basis, e.g. `ironic-conductor`. If the operator has taken advantage of this fine-grained placement, then it is possible that some of the assumptions in Kayobe may be incorrect. This is one downside of the split between Kayobe and Kolla Ansible.

For example, Ironic conductor services may have been moved to a subset of the top level `controllers` group. In this case, we would not want the Ironic networks to be mapped to all hosts in the `controllers` group - only those running Ironic conductor services. The same argument can be made if the loadbalancer services (HAProxy & keepalived) or Neutron dataplane services (e.g. L3 & DHCP agents) have been separated from the top level `network` group.

In these cases, the following variables may be used to tune placement:

#### **controller\_ironic\_conductor\_group**

Ansible inventory group in which Ironic conductor services are deployed. Default is `controllers`.

#### **controller\_ironic\_inspector\_group**

Ansible inventory group in which Ironic inspector services are deployed. Default is `controllers`.

#### **controller\_loadbalancer\_group**

Ansible inventory group in which control plane load balancer services are deployed. Default is `network`.

#### **controller\_network\_group**

Ansible inventory group in which network data plane services are deployed. Default is `network`.

## 3.11.2 Custom Ansible Playbooks

Kayobe supports running custom Ansible playbooks located outside of the kayobe project. This provides a flexible mechanism for customising a control plane. Access to the kayobe variables is possible, ensuring configuration does not need to be repeated.

### Kayobe Custom Playbook API

Explicitly allowing users to run custom playbooks with access to the kayobe variables elevates the variable namespace and inventory to become an interface. This raises questions about the stability of this interface, and the guarantees it provides.

The following guidelines apply to the custom playbook API:

- Only variables defined in the kayobe configuration files under `etc/kayobe` are supported.
- The groups defined in `etc/kayobe/inventory/groups` are supported.
- Any change to a supported variable (rename, schema change, default value change, or removal) or supported group (rename or removal) will follow a deprecation period of one release cycle.

- Kayobes internal roles may not be used.

Note that these are guidelines, and exceptions may be made where appropriate.

## Running Custom Ansible Playbooks

Run one or more custom ansible playbooks:

```
(kayobe) $ kayobe playbook run <playbook>[ <playbook>...]
```

Playbooks do not by default have access to the Kayobe playbook group variables, filter plugins, and test plugins, since these are relative to the current playbooks directory. This can be worked around by creating symbolic links to the Kayobe repository from the Kayobe configuration.

## Packaging Custom Playbooks With Configuration

The kayobe project encourages its users to manage configuration for a cloud using version control, based on the [kayobe-config repository](#). Storing custom Ansible playbooks in this repository makes a lot of sense, and kayobe has special support for this.

It is recommended to store custom playbooks in `$KAYOBE_CONFIG_PATH/ansible/`. It is also possible to use the following subdirectories, and since the Zed 13.0.0 release these will be available to all Kayobe playbook executions.

- roles
- collections
- action\_plugins
- filter\_plugins
- test\_plugins

Note that since the Zed 13.0.0 release, it is no longer necessary to create symlinks in order to use Kayobes roles, collections or plugins. Existing symlinks may be removed.

## Ansible Galaxy

Ansible Galaxy provides a means for sharing Ansible roles and collections. Kayobe configuration may provide a Galaxy requirements file that defines roles and collections to be installed from Galaxy. These roles and collections may then be used by custom playbooks.

Galaxy dependencies may be defined in `$KAYOBE_CONFIG_PATH/ansible/requirements.yml`. These roles and collections will be installed in `$KAYOBE_CONFIG_PATH/ansible/roles/` and `$KAYOBE_CONFIG_PATH/ansible/collections` when bootstrapping the Ansible control host:

```
(kayobe) $ kayobe control host bootstrap
```

And updated when upgrading the Ansible control host:

```
(kayobe) $ kayobe control host upgrade
```

### Example: roles

The following example adds a `foo.yml` playbook to a set of kayobe configuration. The playbook uses a Galaxy role, `bar.baz`.

Here is the kayobe configuration repository structure:

```
etc/kayobe/  
  ansible/  
    foo.yml  
    requirements.yml  
    roles/  
  bifrost.yml  
...
```

Here is the playbook, `ansible/foo.yml`:

```
---  
- hosts: controllers  
  roles:  
    - name: bar.baz
```

Here is the Galaxy requirements file, `ansible/requirements.yml`:

```
---  
roles:  
  - bar.baz
```

We should first install the Galaxy role dependencies, to download the `bar.baz` role:

```
(kayobe) $ kayobe control host bootstrap
```

Then, to run the `foo.yml` playbook:

```
(kayobe) $ kayobe playbook run $KAYOBE_CONFIG_PATH/ansible/foo.yml
```

### Example: collections

The following example adds a `foo.yml` playbook to a set of kayobe configuration. The playbook uses a role from a Galaxy collection, `bar.baz.qux`.

Here is the kayobe configuration repository structure:

```
etc/kayobe/  
  ansible/  
    collections/  
    foo.yml  
    requirements.yml  
  bifrost.yml  
...
```

Here is the playbook, `ansible/foo.yml`:

```
---
- hosts: controllers
  roles:
    - name: bar.baz.qux
```

Here is the Galaxy requirements file, `ansible/requirements.yml`:

```
---
collections:
  - bar.baz
```

We should first install the Galaxy dependencies, to download the `bar.baz` collection:

```
(kayobe) $ kayobe control host bootstrap
```

Then, to run the `foo.yml` playbook:

```
(kayobe) $ kayobe playbook run $KAYOBE_CONFIG_PATH/ansible/foo.yml
```

## Hooks

### Warning

Hooks are an experimental feature and the design could change in the future. You may have to update your config if there are any changes to the design. This warning will be removed when the design has been stabilised.

Hooks allow you to automatically execute custom playbooks at certain points during the execution of a kayobe command. The point at which a hook is run is referred to as a *target*. Please see the [list of available targets](#).

Hooks are created by symlinking an existing playbook into the relevant directory under `$KAYOBE_CONFIG_PATH/hooks`. Kayobe will search the hooks directory for sub-directories matching `<command>.<target>.d`, where `command` is the name of a kayobe command with any spaces replaced with dashes, and `target` is one of the supported targets for the command.

For example, when using the command:

```
(kayobe) $ kayobe control host bootstrap
```

kayobe will search the paths:

- `$KAYOBE_CONFIG_PATH/hooks/control-host-bootstrap/pre.d`
- `$KAYOBE_CONFIG_PATH/hooks/control-host-bootstrap/post.d`

Any playbooks listed under the `pre.d` directory will be run before kayobe executes its own playbooks and any playbooks under `post.d` will be run after. You can affect the order of the playbooks by prefixing the symlink with a sequence number. The sequence number must be separated from the hook name with a dash. Playbooks with smaller sequence numbers are run before playbooks with larger ones. Any ties are broken by alphabetical ordering.

For example to run the playbook `foo.yml` after `kayobe overcloud host configure`, you could do the following:

```
(kayobe) $ mkdir -p ${KAYOBE_CONFIG_PATH}/hooks/overcloud-host-configure/post.  
↪d  
(kayobe) $ cd ${KAYOBE_CONFIG_PATH}/hooks/overcloud-host-configure/post.d  
(kayobe) $ ln -s ../../../../ansible/foo.yml 10-foo.yml
```

The sequence number for the `foo.yml` playbook is 10.

Hook execution can be disabled with `--skip-hooks`. `--skip-hooks all` will halt hook execution altogether. `--skip-hooks <pattern>` will skip playbooks matching the `<pattern>`.

For example, if the following playbooks exist:

- `$KAYOBE_CONFIG_PATH/hooks/control-host-bootstrap/pre.d/example1.yml`
- `$KAYOBE_CONFIG_PATH/hooks/control-host-bootstrap/pre.d/example2.yml`
- `$KAYOBE_CONFIG_PATH/hooks/control-host-bootstrap/post.d/example1.yml`

And the following command is used:

```
(kayobe) $ kayobe control host bootstrap --skip-hooks example1
```

Only `$KAYOBE_CONFIG_PATH/hooks/control-host-bootstrap/pre.d/example2.yml` will be executed.

This example assumes that the term `example1` does not appear in `$KAYOBE_CONFIG_PATH`. If it did, all hooks would be skipped.

## Failure handling

If the exit status of any playbook, including built-in playbooks and custom hooks, is non-zero, kayobe will not run any subsequent hooks or built-in kayobe playbooks. Ansible provides several methods for preventing a task from producing a failure. Please see the [Ansible documentation](#) for more details. Below is an example showing how you can use the `ignore_errors` option to prevent a task from causing the playbook to report a failure:

```
---  
- name: Failure example  
  hosts: localhost  
  tasks:  
    - name: Deliberately fail  
      fail:  
      ignore_errors: true
```

A failure in the `Deliberately fail` task would not prevent subsequent tasks, hooks, and playbooks from running.

## Targets

The following targets are available for all commands:

Table 6: all commands

T	Description
g	
p	Runs before a kayobe command has start executing
p	Runs after a kayobe command has finished executing

### 3.11.3 Multiple Environments

#### Warning

Support for multiple Kayobe environments is considered experimental: its design may change in future versions without a deprecation period.

Sometimes it can be useful to support deployment of multiple environments from a single Kayobe configuration. Most commonly this is to support a deployment pipeline, such as the traditional development, test, staging and production combination. Since the Wallaby release, it is possible to include multiple environments within a single Kayobe configuration, each providing its own Ansible inventory and variables. This section describes how to use multiple environments with Kayobe.

#### Defining Kayobe Environments

By default, a Kayobe configuration directory contains a single environment, represented by the Ansible inventory located at `$KAYOBE_CONFIG_PATH/inventory`, extra variables files (`$KAYOBE_CONFIG_PATH/*.yaml`), custom Ansible playbooks and hooks, and Kolla configuration.

Supporting multiple environments is done through a `$KAYOBE_CONFIG_PATH/environments` directory, under which each directory represents a different environment. Each environment contains its own Ansible inventory, extra variable files, hooks, and Kolla configuration. The following layout shows two environments called `staging` and `production` within a single Kayobe configuration.

```
$KAYOBE_CONFIG_PATH/
environments/
  aa production/
  aa aa hooks/
  aa aa aa overcloud-service-deploy/
  aa aa aa aa pre.d/
  aa aa aa aa 1-prep-stuff.yaml
  aa aa inventory/
  aa aa aa groups
  aa aa aa group_vars/
  aa aa aa hosts
  aa aa aa host_vars/
  aa aa aa overcloud
  aa aa kolla/
  aa aa aa config/
  aa aa aa globals.yaml
  aa aa aa passwords.yaml
  aa aa network-allocation.yaml
  aa aa networks.yaml
```

(continues on next page)

(continued from previous page)

```

  __ __ overcloud.yml
  __ staging/
  __     inventory/
  __     __ groups
  __     __ group_vars/
  __     __ hosts
  __     __ host_vars/
  __     __ overcloud
  __     kolla/
  __     __ config/
  __     __ globals.yml
  __     __ passwords.yml
  __     network-allocation.yml
  __     networks.yml
  __     overcloud.yml
```

## Naming

The environment name `kayobe` is reserved for internal use. The name should be a valid directory name, otherwise there are no other restrictions.

## Ansible Inventories

Each environment can include its own inventory, which overrides any variable declaration done in the shared inventory. Typically, a shared inventory may be used to define groups and group variables, while hosts and host variables would be set in environment inventories. The following layout (ignoring non-inventory files) shows an example of multiple inventories.

```

$KAYOBE_CONFIG_PATH/
  environments/
  __ production/
  __ __ inventory/
  __ __ __ hosts
  __ __ __ host_vars/
  __ __ __ overcloud
  __ staging/
  __     inventory/
  __     __ hosts
  __     __ host_vars/
  __     __ overcloud
  inventory/
    groups
    group_vars/
```

## Custom Kolla Ansible inventories

Kayobe has a *feature* to pass through additional inventories to Kolla Ansible. When using multiple environments, these are passed through as additional inventories to Ansible. The ordering is such that the inventory in the base layer of kayobe config overrides the internal kayobe inventory, and inventory in the environment overrides inventory in the base layer:

```
ansible-playbook -i <internal kayobe inventory> -i <inventory from base layer>
→ -i <inventory from environment>
```

See *Custom Kolla Inventory* for more details.

## Shared Extra Variables Files

All of the extra variables files in the Kayobe configuration directory (`$KAYOBE_CONFIG_PATH/*.yaml`) are shared between all environments. Each environment can override these extra variables through environment-specific extra variables files (`$KAYOBE_CONFIG_PATH/environments/<environment>/*.yaml`).

This means that all configuration in shared extra variable files must apply to all environments. Where configuration differs between environments, move the configuration to extra variables files under each environment.

For example, to add environment-specific DNS configuration for variables in `dns.yaml`, set these variables in `$KAYOBE_CONFIG_PATH/environments/<environment>/dns.yaml`:

```
$KAYOBE_CONFIG_PATH/
dns.yaml
environments/
  production/
    dns.yaml
  staging/
    dns.yaml
```

## Network Configuration

Networking is an area in which configuration is typically specific to an environment. There are two main global configuration files that need to be considered: `networks.yaml` and `network-allocation.yaml`.

Move the environment-specific parts of this configuration to environment-specific extra variables files:

- `networks.yaml` -> `$KAYOBE_CONFIG_PATH/environments/<environment>/networks.yaml`
- `network-allocation.yaml` -> `$KAYOBE_CONFIG_PATH/environments/<environment>/network-allocation.yaml`

Other network configuration that may differ between environments includes:

- DNS (`dns.yaml`)
- network interface names, which may be set via group variables in environment inventories

## Other Configuration

Typically it is necessary to customise `overcloud_group_hosts_map` in each environment. This is done via the `overcloud.yaml` file documented in *Control Plane Service Placement*.

When using baremetal compute nodes, allocation of TCP ports for serial console functionality is typically specific to an environment (`console-allocation.yaml`). This file is automatically managed by Kayobe, like the `network-allocation.yaml` file.

## Kolla Configuration

In the Wallaby release, Kolla configuration was independent in each environment. The Xena release supported combining environment-specific and shared configuration file content for the following subset of the files:

- `kolla/config/bifrost/bifrost.yml`
- `kolla/config/bifrost/dib.yml`
- `kolla/config/bifrost/servers.yml`
- `kolla/globals.yml`
- `kolla/kolla-build.conf`
- `kolla/repos.yml` or `kolla/repos.yaml`

The Antelope release expands upon this list to add support for combining Kolla Ansible custom service configuration. This behaviour is configured using two variables:

- `kolla_openstack_custom_config_include_globs`: Specifies which files are considered when templating the Kolla configuration. The Kayobe defaults are set using `kolla_openstack_custom_config_include_globs_default`. An optional list of additional globs can be set using: `kolla_openstack_custom_config_include_globs_extra`. These are combined with `kolla_openstack_custom_config_include_globs_default` to produce `kolla_openstack_custom_config_include_globs`. Each list entry is a dictionary with the following keys:
  - `enabled`: Boolean which determines if this rule is used. Set to `false` to disable the rule.
  - `glob`: String glob matching a relative path in the `kolla/config` directory

An example of such a rule:

```
enabled: '{{ kolla_enable_aodh | bool }}'  
glob: aodh/**
```

- `kolla_openstack_custom_config_rules`: List of rules that specify the strategy to use when generating a particular file. The Kayobe defaults are set using `kolla_openstack_custom_config_rules_default`. An optional list of additional rules can be set using: `kolla_openstack_custom_config_rules_extra`. These are combined with `kolla_openstack_custom_config_rules_default` to produce `kolla_openstack_custom_config_rules`. Each list entry is a dictionary with the format:
  - `glob`: A glob matching files for this rule to match on (relative to the search path)
  - `priority`: The rules are processed in increasing priority order with the first rule matching taking effect
  - `strategy`: How to process the matched file. One of `copy`, `concat`, `template`, `merge_configs`, `merge_yaml`
  - `params`: Optional list of additional params to pass to module enacting the strategy

An example of such a rule:

```
glob: a/path/test.yml
strategy: merge_yaml
priority: 1000
params:
  extend_lists: true
```

The Kayobe defaults fallback to using the `template` strategy, with a priority of 65535. To override this behaviour configure a rule with a lower priority e.g:

```
glob: horizon/themes/**
strategy: copy
priority: 1000
```

The default INI merging strategy can be configured using: `kolla_openstack_custom_config_ini_merge_strategy`. It defaults to `concat` for backwards compatibility. An alternative strategy is `merge_configs` which will merge the two INI files so that values set in the environment take precedence over values set in the shared files. The caveat with the `merge_configs` strategy is that files must template to valid INI. This is mostly an issue when you use raw Jinja tags, for example:

```
[defaults]
{% raw %}
{% if inventory_hostname in 'compute' %}
foo=bar
{% else %}
foo=baz
{% endif %}
{% endraw %}
```

After the first round of templating by Kayobe the raw tags are stripped. This leaves:

```
[defaults]
{% if inventory_hostname in 'compute' %}
foo=bar
{% else %}
foo=baz
{% endif %}
```

Which isn't valid INI (due to the Jinja if blocks) and cannot be merged. In most cases the templating can be refactored:

```
[defaults]
{% raw %}
foo={{ 'bar' if inventory_hostname in 'compute' else 'baz' }}
{% endraw %}
```

Alternatively, you can use Kolla host or group variables.

## Disabling the default rules

There are some convenience variables to disable a subset of the rules in `kolla_openstack_custom_config_rules_default`:

- `kolla_openstack_custom_config_rules_default_remove`: Allows you remove a rule by matching on the glob:

```
kolla_openstack_custom_config_rules_default_remove:  
- "**/*.ini"
```

- `kolla_openstack_custom_config_merge_configs_enabled`: Enables rules for matching INI files. Default is true.
- `kolla_openstack_custom_config_merge_yaml_enabled`: Enables rules for matching YAML files. Default is true.

These allow you to more easily keep in sync with the upstream defaults. If you had an override on `kolla_openstack_custom_config_rules`, that replicated most of `kolla_openstack_custom_config_rules_default` youd have to keep this in sync with the upstream kayobe defaults.

## Search paths

When merging config files the following locations are searched to find files with an identical relative path:

- `<environment-path>/kolla/config`
- `<shared-files-path>/kolla/config`
- `<kolla-openstack-role-path>/templates/kolla/config`

Not all strategies use all of the files when generating the kolla config. For instance, the copy strategy will use the first file found when searching each of the paths.

There is a feature flag: `kolla_openstack_custom_config_environment_merging_enabled`, that may be set to `false` to prevent Kayobe searching the shared files path when merging configs. This is to replicate the legacy behaviour where the environment Kolla custom service configuration was not merged with the base layer. We still merge the files with Kayobes defaults in the `kolla-openstack` roles internal templates.

## Managing Independent Environment Files

For files that are independent in each environment, i.e. they do not support combining the environment-specific and shared configuration file content, there are some techniques that may be used to avoid duplication.

For example, symbolic links can be used to share common variable definitions. It is advised to avoid sharing credentials between environments by making each Kolla `passwords.yml` file unique.

## Custom Ansible Playbooks

*Custom Ansible playbooks*, roles and requirements file under `$KAYOBE_CONFIG_PATH/ansible` are currently shared across all environments.

## Hooks

Prior to the Caracal 16.0.0 release, *hooks* were shared across all environments. Since Caracal it is possible to define hooks on a per-environment basis. Hooks are collected from all environments and the base configuration. Where multiple hooks exist with the same name, the environments hook takes precedence and *replaces* the other hooks. Execution order follows the normal rules, regardless of where each hook is defined.

For example, the base configuration defines the following hooks:

- `$KAYOBE_CONFIG_PATH/hooks/overcloud-service-deploy/pre.d/1-base.yml`
- `$KAYOBE_CONFIG_PATH/hooks/overcloud-service-deploy/pre.d/2-both.yml`

The environment defines the following hooks:

- `$KAYOBE_CONFIG_PATH/environments/env/hooks/overcloud-service-deploy/pre.d/2-both.yml`
- `$KAYOBE_CONFIG_PATH/environments/env/hooks/overcloud-service-deploy/pre.d/3-env.yml`

The following hooks will execute in the order shown:

- `$KAYOBE_CONFIG_PATH/hooks/overcloud-service-deploy/pre.d/1-base.yml`
- `$KAYOBE_CONFIG_PATH/environments/env/hooks/overcloud-service-deploy/pre.d/2-both.yml`
- `$KAYOBE_CONFIG_PATH/environments/env/hooks/overcloud-service-deploy/pre.d/3-env.yml`

## Ansible Configuration

Ansible configuration at `$KAYOBE_CONFIG_PATH/ansible.cfg` or `$KAYOBE_CONFIG_PATH/kolla/ansible.cfg` is currently shared across all environments.

## Dynamic Variable Definitions

It may be beneficial to define variables in a file shared by multiple environments, but still set variables to different values based on the environment. The Kayobe environment in use can be retrieved within Ansible via the `kayobe_environment` variable. For example, some variables from `$KAYOBE_CONFIG_PATH/networks.yml` could be shared in the following way:

Listing 193: `$KAYOBE_CONFIG_PATH/networks.yml`

```
external_net_fqdn: "{{ kayobe_environment }}-api.example.com"
```

This would configure the external FQDN for the staging environment at `staging-api.example.com`, while the production external FQDN would be at `production-api.example.com`.

## Environment Dependencies

### Warning

This is an experimental feature and is still subject to change whilst the design is finalised.

Since the Antelope 14.0.0 release, multiple environments can be layered on top of each other by declaring dependencies in a `.kayobe-environment` file located in the environment subdirectory. For example:

Listing 194: `$KAYOBE_CONFIG_PATH/environments/  
environment-C/.kayobe-environment`

```
dependencies:  
- environment-B
```

Listing 195: `$KAYOBE_CONFIG_PATH/environments/  
environment-B/.kayobe-environment`

```
dependencies:  
- environment-A
```

Kayobe uses a dependency resolver to order these environments into a linear chain. Any dependency cycles will result in an error. Using the example above the chain would be resolved to:

```
C -> B -> A
```

Where C is the environment with highest precedence. Kayobe will make sure to include the inventory and extra-vars in an order matching this chain when running any playbooks.

## Mixin environments

Environment dependencies can be used to design fragments of re-useable configuration that can be shared across multiple environments. For example:

Listing 196: `$KAYOBE_CONFIG_PATH/environments/  
environment-A/.kayobe-environment`

```
dependencies:  
- environment-mixin-1  
- environment-mixin-2  
- environment-mixin-3
```

In this case, each environment dependency could provide the configuration necessary for one or more features. The mixin environments do not necessarily need to define any dependencies between them, however Kayobe will perform a topological sort to determine a suitable precedence. Care should be taken to make sure that environments without an explicit ordering do not modify the same variables.

## Final Considerations

While its clearly desirable to keep staging functionally as close to production, this is not always possible due to resource constraints and other factors. Test and development environments can deviate further, perhaps only providing a subset of the functionality available in production, in a substantially different environment. In these cases it will clearly be necessary to use environment-specific configuration in a number of files. We cant cover all the cases here, but hopefully weve provided a set of techniques that can be used.

## Using Kayobe Environments

Once environments are defined, Kayobe can be instructed to manage them with the `$KAYOBE_ENVIRONMENT` environment variable or the `--environment` command-line argument:

```
(kayobe) $ kayobe control host bootstrap --environment staging
```

```
(kayobe) $ export KAYOBE_ENVIRONMENT=staging
(kayobe) $ kayobe control host bootstrap
```

The `kayobe-env` environment file in `kayobe-config` can also take an `--environment` argument, which exports the `KAYOBE_ENVIRONMENT` environment variable.

```
(kayobe) $ source kayobe-env --environment staging
(kayobe) $ kayobe control host bootstrap
```

Finally, an environment name can be specified under `$KAYOBE_CONFIG_ROOT/.environment`, which will be used by the `kayobe-env` script if no `--environment` argument is used. This is particularly useful when using a separate branch for each environment.

```
(kayobe) $ echo "staging" > .environment
(kayobe) $ source kayobe-env
(kayobe) $ kayobe control host bootstrap
```

### Warning

The locations of the Kolla Ansible source code and Python virtual environment remain the same for all environments when using the `kayobe-env` file. When using the same control host to manage multiple environments with different versions of Kolla Ansible, clone the Kayobe configuration in different locations, so that Kolla Ansible source repositories and Python virtual environments will not conflict with each other. The generated Kolla Ansible configuration is also shared: Kayobe will store the name of the active environment under `$KOLLA_CONFIG_PATH/.environment` and produce a warning if a conflict is detected.

## Migrating to Kayobe Environments

Kayobe users already managing multiple environments will already have multiple Kayobe configurations, whether in separate repositories or in different branches of the same repository. Kayobe provides the `kayobe environment create` command to help migrating to a common repository and branch with multiple environments. For example, the following commands will create two new environments for production and staging based on existing Kayobe configurations.

```
(kayobe) $ kayobe environment create --source-config-path ~/kayobe-config-
→prod/etc/kayobe \
           --environment production
(kayobe) $ kayobe environment create --source-config-path ~/kayobe-config-
→staging/etc/kayobe \
           --environment staging
```

This command recursively copies files and directories (except the `environments` directory if one exists) under the existing configuration to a new environment. Merging shared configuration must be done manually.

## 3.12 Contributor Guide

### 3.12.1 Contributor Guide

This guide is for contributors of the Kayobe project. It includes information on proposing your first patch and how to participate in the community. It also covers responsibilities of core reviewers and the Project Team Lead (PTL), and information about development processes.

We welcome everyone to join our project!

#### So You Want to Contribute

For general information on contributing to OpenStack, please check out the [contributor guide](#) to get started. It covers all the basics that are common to all OpenStack projects: the accounts you need, the basics of interacting with our Gerrit review system, how we communicate as a community, etc.

Below will cover the more project specific information you need to get started with Kayobe.

#### Basics

The source repository for this project can be found at:

<https://opendev.org/openstack/kayobe>

#### Communication

Kayobe shares communication channels with Kolla.

##### IRC Channel

#openstack-kolla ([channel logs](#)) on OFTC

##### Weekly Meetings

On Wednesdays in the IRC channel ([meeting information](#))

##### Mailing list (prefix subjects with [kolla])

<http://lists.openstack.org/pipermail/openstack-discuss/>

##### Meeting Agenda

<https://wiki.openstack.org/wiki/Meetings/Kolla>

##### Whiteboard (etherpad)

Keeping track of CI gate status, release status, stable backports, planning and feature development status. <https://etherpad.openstack.org/p/KollaWhiteBoard>

#### Contacting the Core Team

The list in alphabetical order (on first name):

Name	IRC nick	Email address
Doug Szumski	dougsz	<a href="mailto:doug@stackhpc.com">doug@stackhpc.com</a>
John Garbutt	johnthetubaguy	<a href="mailto:john@johngarbutt.com">john@johngarbutt.com</a>
Kevin Tibi	ktibi	<a href="mailto:kevintibi@hotmail.com">kevintibi@hotmail.com</a>
Mark Goddard	mgoddard	<a href="mailto:mark@stackhpc.com">mark@stackhpc.com</a>
Pierre Riteau	priteau	<a href="mailto:pierre@stackhpc.com">pierre@stackhpc.com</a>
Will Szumski	jovial	<a href="mailto:will@stackhpc.com">will@stackhpc.com</a>

The current effective list is also available from Gerrit: <https://review.opendev.org/#/admin/groups/1875,members>

## New Feature Planning

New features are discussed via IRC or mailing list (with [kolla] prefix). Kayobe project keeps RFEs in [Launchpad](#). Please use [RFE] prefix in the bug subject. Note this is the same place as for bugs. Specs are welcome but not strictly required.

## Task Tracking

Kayobe project tracks tasks in [Launchpad](#). Note this is the same place as for bugs.

A more lightweight task tracking is done via etherpad - [Whiteboard](#).

To see an overview of in-progress patches, sorted into useful sections, you can view the [Kayobe Review Dashboard](#).

## Reporting a Bug

You found an issue and want to make sure we are aware of it? You can do so on [Launchpad](#). Note this is the same place as for tasks.

## Getting Your Patch Merged

Most changes proposed to Kayobe require two +2 votes from core reviewers before +W. A release note is required on most changes as well. Release notes policy is described in *its own section*.

Significant changes should have documentation and testing provided with them.

## Project Team Lead Duties

All common PTL duties are enumerated in the [PTL guide](#). Release tasks are described in the *Kayobe releases guide*.

## Development

### Source Code Orientation

There are a number of layers to Kayobe, so here we provide a few pointers to the major parts.

### CLI

The Command Line Interface (CLI) is built using the [cliff](#) library. Commands are exposed as Python entry points in [setup.cfg](#). These entry points map to classes in [kayobe/cli/commands.py](#). The helper modules [kayobe/ansible.py](#) and [kayobe/kolla\\_ansible.py](#) are used to execute Kayobe playbooks and Kolla Ansible commands respectively.

### Ansible

Kayobes Ansible playbooks live in [ansible/\\*.yaml](#), and these typically execute roles in [ansible/roles/](#). Global variable defaults are defined in group variable files in [ansible/inventory/group\\_vars/all/](#) and these typically map to commented out variables in the configuration files in [etc/kayobe/\\*.yaml](#). A number of

custom Jinja filters exist in `ansible/filter_plugins/*.py`. Kayobe depends on roles and collections hosted on Ansible Galaxy, and these and their version requirements are defined in `requirements.yml`.

## Ansible Galaxy

Kayobe uses a number of Ansible roles and collections hosted on Ansible Galaxy. The role dependencies are tracked in `requirements.yml`, and specify required versions. The process for changing a Galaxy role or collection is as follows:

1. If required, develop changes for the role or collection. This may be done outside of Kayobe, or by modifying the code in place during development. If upstream changes to the code have already been made, this step can be skipped.
2. Commit changes to the role or collection, typically via a Github pull request.
3. Request that a tagged release of the role or collection be made, or make one if you have the necessary privileges.
4. Ensure that automatic imports are configured for the repository using e.g. a webhook notification, or perform a manual import of the role on Ansible Galaxy.
5. Modify the version in `requirements.yml` to match the new release of the role or collection.

## Vagrant

Kayobe provides a Vagrantfile that can be used to bring up a virtual machine for use as a development environment. The VM is based on the `centos/8` CentOS 8 image, and supports the following providers:

- VirtualBox
- VMWare Fusion

The VM is configured with 4GB RAM and a 20GB HDD. It has a single private network in addition to the standard Vagrant NAT network.

## Preparation

First, ensure that Vagrant is installed and correctly configured to use the required provider. Also install the following vagrant plugins:

```
vagrant plugin install vagrant-reload vagrant-disksize
```

If using the VirtualBox provider, install the following vagrant plugin:

```
vagrant plugin install vagrant-vbguest
```

Note: if using Ubuntu 16.04 LTS, you may be unable to install any plugins. To work around this install the upstream version from [www.virtualbox.org](http://www.virtualbox.org).

## Usage

Later sections in the development guide cover in more detail how to use the development VM in different configurations. These steps cover bringing up and accessing the VM.

Clone the kayobe repository:

```
git clone https://opendev.org/openstack/kayobe.git -b master
```

Change the current directory to the kayobe repository:

```
cd kayobe
```

Inspect kayobes `Vagrantfile`, noting the provisioning steps:

```
less Vagrantfile
```

Bring up a virtual machine:

```
vagrant up
```

Wait for the VM to boot, then SSH in:

```
vagrant ssh
```

## Manual Setup

This section provides a set of manual steps to set up a development environment for an OpenStack controller in a virtual machine using [Vagrant](#) and Kayobe.

For a more automated and flexible procedure, see [Automated Setup](#).

## Preparation

Follow the steps in [Vagrant](#) to prepare your environment for use with Vagrant and bring up a Vagrant VM.

## Manual Installation

Sometimes the best way to learn a tool is to ditch the scripts and perform a manual installation.

SSH into the controller VM:

```
vagrant ssh
```

Source the kayobe virtualenv activation script:

```
source kayobe-venv/bin/activate
```

Change the current directory to the Vagrant shared directory:

```
cd /vagrant
```

Source the kayobe environment file:

```
source kayobe-env
```

Bootstrap the kayobe Ansible control host:

```
kayobe control host bootstrap
```

Configure the controller host:

```
kayobe overcloud host configure
```

At this point, container images must be acquired. They can either be built locally or pulled from an image repository if appropriate images are available.

Either build container images:

```
kayobe overcloud container image build
```

Or pull container images:

```
kayobe overcloud container image pull
```

Deploy the control plane services:

```
kayobe overcloud service deploy
```

Source the OpenStack environment file:

```
source ${KOLLA_CONFIG_PATH:-/etc/kolla}/admin-openrc.sh
```

Perform post-deployment configuration:

```
kayobe overcloud post configure
```

## Next Steps

The OpenStack control plane should now be active. Try out the following:

- register a user
- create an image
- upload an SSH keypair
- access the horizon dashboard

The cloud is your oyster!

## To Do

Create virtual baremetal nodes to be managed by the OpenStack control plane.

## Automated Setup

This section provides information on the development tools provided by Kayobe to automate the deployment of various development environments.

For a manual procedure, see *Manual Setup*.

## Overview

The Kayobe development environment automation tooling is built using simple shell scripts. Some minimal configuration can be applied by setting the environment variables in `dev/config.sh`. Control plane configuration is typically provided via the `kayobe-config-dev` repository, although it is also possible to

use your own Kayobe configuration. This allows us to build a development environment that is as close to production as possible.

## Environments

The following development environments are supported:

- Overcloud (single OpenStack controller)
- Seed

The [Universe from Nothing](#) workshop may be of use for more advanced testing scenarios involving a seed hypervisor, seed VM, and separate control and compute nodes.

## Overcloud

### Preparation

Clone the Kayobe repository:

```
git clone https://opendev.org/openstack/kayobe.git -b master
```

Change the current directory to the Kayobe repository:

```
cd kayobe
```

Clone the kayobe-config-dev repository to config/src/kayobe-config

```
mkdir -p config/src
git clone https://opendev.org/openstack/kayobe-config-dev.git config/src/
↪kayobe-config -b master
```

Inspect the Kayobe configuration and make any changes necessary for your environment.

If you want to test bare metal compute nodes as described in [Bare Metal Compute](#), enable Ironic by adding the following to config/src/kayobe-config/etc/kayobe/kolla.yml:

```
kolla_enable_ironic: True
```

If using Vagrant, follow the steps in [Vagrant](#) to prepare your environment for use with Vagrant and bring up a Vagrant VM.

If not using Vagrant, the default development configuration expects the presence of a bridge interface on the OpenStack controller host to carry control plane traffic. The bridge should be named `breth1` with a single port `dummy1`, and an IP address of `192.168.33.3/24`. This can be modified by editing `config/src/kayobe-config/etc/kayobe/inventory/group_vars/controllers/network-interfaces`.

This can be added using the following commands:

```
sudo ip l add breth1 type bridge
sudo ip l set breth1 up
sudo ip a add 192.168.33.3/24 dev breth1
sudo ip l add dummy1 type dummy
sudo ip l set dummy1 up
sudo ip l set dummy1 master breth1
```

## Configuration

### Enable TLS

Apply the following configuration if you wish to enable TLS for the OpenStack API:

Set the following option in `config/src/kayobe-config/etc/kayobe/kolla.yml`:

```
kolla_enable_tls_internal: "yes"
```

Set the following options in `config/src/kayobe-config/etc/kayobe/kolla/globals.yml`:

```
kolla_copy_ca_into_containers: "yes"
openstack_cacert: "{% if os_distribution == 'ubuntu' %}/etc/ssl/certs/ca-
↪certificates.crt{% else %}/etc/pki/tls/certs/ca-bundle.crt{% endif %}"
kolla_admin_openrc_cacert: "{% if os_distribution == 'ubuntu' %}/etc/ssl/
↪certs/ca-certificates.crt{% else %}/etc/pki/tls/certs/ca-bundle.crt{% endif
↪%}"
```

## Usage

If using Vagrant, SSH into the Vagrant VM and change to the shared directory:

```
vagrant ssh
cd /vagrant
```

If not using Vagrant, run the `dev/install-dev.sh` script to install Kayobe and its dependencies in a Python virtual environment:

```
./dev/install-dev.sh
```

### Note

This will create an *editable install*. It is also possible to install Kayobe in a non-editable way, such that changes will not be seen until you reinstall the package. To do this you can run `./dev/install.sh`.

If you are using TLS and wish to generate self-signed certificates:

```
export KAYOBE_OVERCLOUD_GENERATE_CERTIFICATES=1
```

Run the `dev/overcloud-deploy.sh` script to deploy the OpenStack control plane:

```
./dev/overcloud-deploy.sh
```

Upon successful completion of this script, the control plane will be active.

## Testing

Scripts are provided for testing the creation of virtual and bare metal instances.

## Virtual Machines

The control plane can be tested by running the `dev/overcloud-test-vm.sh` script. This will run the `init-runonce` setup script provided by Kolla Ansible that registers images, networks, flavors etc. It will then deploy a virtual server instance, and delete it once it becomes active:

```
./dev/overcloud-test-vm.sh
```

## Bare Metal Compute

For a control plane with Ironic enabled, a bare metal instance can be deployed. We can use the [Tenks](#) project to create fake bare metal nodes.

Clone the tenks repository:

```
git clone https://opendev.org/openstack/tenks.git
```

Optionally, edit the Tenks configuration file, `dev/tenks-deploy-config-compute.yml`.

Run the `dev/tenks-deploy-compute.sh` script to deploy Tenks:

```
./dev/tenks-deploy-compute.sh ./tenks
```

Check that Tenks has created VMs called `tk0` and `tk1`:

```
sudo virsh list --all
```

Verify that VirtualBMC is running:

```
~/tenks-venv/bin/vbmc list
```

Configure the firewall to allow the baremetal nodes to access OpenStack services:

```
./dev/configure-firewall.sh
```

We are now ready to run the `dev/overcloud-test-baremetal.sh` script. This will run the `init-runonce` setup script provided by Kolla Ansible that registers images, networks, flavors etc. It will then deploy a bare metal server instance, and delete it once it becomes active:

```
./dev/overcloud-test-baremetal.sh
```

The machines and networking created by Tenks can be cleaned up via `dev/tenks-teardown-compute.sh`:

```
./dev/tenks-teardown-compute.sh ./tenks
```

## Upgrading

It is possible to test an upgrade from a previous release by running the `dev/overcloud-upgrade.sh` script:

```
./dev/overcloud-upgrade.sh
```

## Seed

These instructions cover deploying the seed services directly rather than in a VM.

## Preparation

Clone the Kayobe repository:

```
git clone https://opendev.org/openstack/kayobe.git -b master
```

Change to the kayobe directory:

```
cd kayobe
```

Clone the kayobe-config-dev repository to config/src/kayobe-config:

```
mkdir -p config/src
git clone https://opendev.org/openstack/kayobe-config-dev.git config/src/
↪kayobe-config -b master
```

Inspect the Kayobe configuration and make any changes necessary for your environment.

The default development configuration expects the presence of a bridge interface on the seed host to carry provisioning traffic. The bridge should be named `breth1` with a single port `eth1`, and an IP address of `192.168.33.5/24`. This can be modified by editing `config/src/kayobe-config/etc/kayobe/inventory/group_vars/seed/network-interfaces`. Alternatively, this can be added using the following commands:

```
sudo ip l add breth1 type bridge
sudo ip l set breth1 up
sudo ip a add 192.168.33.5/24 brd 192.168.33.255 dev breth1
sudo ip l add dummy1 type dummy
sudo ip l set dummy1 up
sudo ip l set dummy1 master breth1
```

## Usage

Run the `dev/install.sh` script to install Kayobe and its dependencies in a Python virtual environment:

```
./dev/install.sh
```

Run the `dev/seed-deploy.sh` script to deploy the seed services:

```
export KAYOBE_SEED_VM_PROVISION=0
./dev/seed-deploy.sh
```

Upon successful completion of this script, the seed will be active.

## Testing

The seed services may be tested using the [Tenks](#) project to create fake bare metal nodes.

If your seed has a non-standard MTU, you should set it via `aio_mtu` in `etc/kayobe/networks.yml`.

Clone the `tenks` repository:

```
git clone https://opendev.org/openstack/tenks.git
```

Optionally, edit the Tenks configuration file, `dev/tenks-deploy-config-overcloud.yml`.

Run the `dev/tenks-deploy-overcloud.sh` script to deploy Tenks:

```
./dev/tenks-deploy-overcloud.sh ./tenks
```

Check that Tenks has created a VM called `controller0`:

```
sudo virsh list --all
```

Verify that VirtualBMC is running:

```
~/tenks-venv/bin/vbmc list
```

It is now possible to discover, inspect and provision the controller VM:

```
source dev/environment-setup.sh
kayobe overcloud inventory discover
kayobe overcloud hardware inspect
kayobe overcloud provision
```

The controller VM is now accessible via SSH as the bootstrap user (`centos` or `ubuntu`) at `192.168.33.3`.

The machines and networking created by Tenks can be cleaned up via `dev/tenks-teardown-overcloud.sh`:

```
./dev/tenks-teardown-overcloud.sh ./tenks
```

## Upgrading

It is possible to test an upgrade by running the `dev/seed-upgrade.sh` script:

```
./dev/seed-upgrade.sh
```

## Testing

Kayobe has a number of test suites covering different areas of code. Many tests are run in virtual environments using `tox`.

## Preparation

### System Prerequisites

The following packages should be installed on the development system prior to running kayobes tests.

- Ubuntu/Debian:

```
sudo apt-get install build-essential python3-dev libssl-dev python3-pip
↪git
```

- Fedora or CentOS Stream 9/Rocky 9/RHEL 9:

```
sudo dnf install python3-devel openssl-devel python3-pip git gcc
```

- OpenSUSE/SLE 12:

```
sudo zypper install python3-devel python3-pip libopenssl-devel git
```

## Python Prerequisites

If your distro has at least `tox 1.8`, use your system package manager to install the `python-tox` package. Otherwise install this on all distros:

```
sudo pip install -U tox
```

You may need to explicitly upgrade `virtualenv` if youve installed the one from your OS distribution and it is too old (`tox` will complain). You can upgrade it individually, if you need to:

```
sudo pip install -U virtualenv
```

## Running Unit Tests Locally

If you havent already, the kayobe source code should be pulled directly from git:

```
# from your home or source directory
cd ~
git clone https://opendev.org/openstack/kayobe.git -b master
cd kayobe
```

## Running Unit and Style Tests

Kayobe defines a number of different tox environments in `tox.ini`. The default environments may be displayed:

```
tox -list
```

To run all default environments:

```
tox
```

To run one or more specific environments, including any of the non-default environments:

```
tox -e <environment>[,<environment>]
```

## Environments

The following tox environments are provided:

### ansible

Run Ansible tests for some ansible roles using Ansible playbooks.

### ansible-lint

Run Ansible linter.

**ansible-syntax**

Run a syntax check for all Ansible files.

**docs**

Build Sphinx documentation.

**molecule**

Run Ansible tests for some Ansible roles using the molecule test framework.

**pep8**

Run style checks for all shell, python and documentation files.

**py3**

Run python unit tests for kayobe python module.

## Writing Tests

### Unit Tests

Unit tests follow the lead of OpenStack, and use `unittest`. One difference is that tests are run using the discovery functionality built into `unittest`, rather than `ostestr/stestr`. Unit tests are found in `kayobe/tests/unit/`, and should be added to cover all new python code.

### Ansible Role Tests

Two types of test exist for Ansible roles - pure Ansible and molecule tests.

#### Pure Ansible Role Tests

These tests exist for the `kolla-ansible` role, and are found in `ansible/<role>/tests/*.yaml`. The role is exercised using an ansible playbook.

#### Molecule Role Tests

`Molecule` is an Ansible role testing framework that allows roles to be tested in isolation, in a stable environment, under multiple scenarios. Kayobe uses Docker engine to provide the test environment, so this must be installed and running on the development system.

Molecule scenarios are found in `ansible/<role>/molecule/<scenario>`, and defined by the config file `ansible/<role>/molecule/<scenario>/molecule.yaml`. Tests are written in python using the `pytest` framework, and are found in `ansible/<role>/molecule/<scenario>/tests/test_*.py`.

Molecule tests currently exist for the `kolla-openstack` role, and should be added for all new roles where practical.

## Release notes

### Introduction

Kayobe (just like Kolla) uses the following release notes sections:

- **features** for new features or functionality; these should ideally refer to the blueprint being implemented;
- **fixes** for fixes closing bugs; these must refer to the bug being closed;

- **upgrade** for notes relevant when upgrading from previous version; these should ideally be added only between major versions; required when the proposed change affects behaviour in a non-backwards compatible way or generally changes something impactful;
- **deprecations** to track deprecated features; relevant changes may consist of only the commit message and the release note;
- **prelude** filled in by the PTL before each release or RC.

Other release note types may be applied per common sense. Each change should include a release note unless being a `TrivialFix` change or affecting only docs or CI. Such changes should *not* include a release note to avoid confusion. Remember release notes are mostly for end users which, in case of Kayobe, are OpenStack administrators/operators. In case of doubt, the core team will let you know what is required.

To add a release note, run the following command:

```
tox -e venv -- reno new <summary-line-with-dashes>
```

All release notes can be inspected by browsing `releasenotes/notes` directory. Further on this page we show reno templates, examples and how to make use of them.

#### Note

The term *release note* is often abbreviated to *reno* as it is the name of the tool that is used to manage the release notes.

To generate renos in HTML format in `releasenotes/build`, run:

```
tox -e releasenotes
```

Note this requires the release note to be tracked by `git` so you have to at least add it to the `git` staging area.

## Templates and examples

All approved release notes end up being published on a dedicated site:

<https://docs.openstack.org/releasenotes/kayobe/>

When looking for examples, it is advised to consider browsing the page above for a similar type of change and then comparing with their source representation in `releasenotes/notes`.

The sections below give further guidelines. Please try to follow them but note they are not set in stone and sometimes a different wording might be more appropriate. In case of doubt, the core team will be happy to help.

## Features

### Template

```
---
features:
  - |
```

(continues on next page)

(continued from previous page)

```
Implements [some feature].
[Can be described using multiple sentences if necessary.]
```

## Example

Implementing feature with id *letsencrypt-https*, we use **reno** to generate the scaffolded file:

```
tox -e venv -- reno new --from-template releasenotes/templates/feature.yml
↳ letsencrypt-https
```

And then fill it out with the following content (for example):

```
---
features:
- |
  Implements support for hassle-free integration with Let's Encrypt.
  The support is limited to operators in the underworld.
  For more details check the TLS docs of Kayobe.
```

## Fixes

### Template

```
---
fixes:
- |
  Fixes [some bug].
  [Can be described using multiple sentences if necessary.]
  [Possibly also giving the previous behaviour description.]
  `LP#[bug number] <https://bugs.launchpad.net/kayobe/+bug/[bug number]>`__
```

## Example

Fixing bug number 9999999, we use **reno** to generate the scaffolded file:

```
tox -e venv -- reno new --from-template releasenotes/templates/fix.yml bug-
↳ 9999999
```

And then fill it out with the following content (for example):

```
---
fixes:
- |
  Fixes ``deploy-containers`` action missing for the Masakari role.
  `LP#9999999 <https://bugs.launchpad.net/kayobe/+bug/9999999>`__
```

## Releases

This guide is intended to complement the [OpenStack releases site](#), and the project team guides section on [release management](#).

Team members make themselves familiar with the release schedule for the current release, for example <https://releases.openstack.org/train/schedule.html>.

## Release Model

As a deployment project, Kayobes release model differs from many other OpenStack projects. Kayobe follows the [cycle-trailing](#) release model, to allow time after the OpenStack coordinated release to wait for distribution packages and support new features. This gives us three months after the final release to prepare our final releases. Users are typically keen to try out the new release, so we should aim to release as early as possible while ensuring we have confidence in the release.

## Release Schedule

While we dont wish to repeat the OpenStack release documentation, we will point out the high level schedule, and draw attention to areas where our process is different.

## Milestones

At each of the various release milestones, pay attention to what other projects are doing.

## Feature Freeze

As with projects following the common release model, Kayobe uses a feature freeze period to allow the code to stabilise prior to release. There is no official feature freeze date for the cycle-trailing model, but we typically freeze around **three weeks** after the common feature freeze. During this time, no features should be merged to the master branch.

## Before RC1

Prior to creating a release candidate and stable branch, the following tasks should be performed.

## Testing

Test the code and fix at a minimum all critical issues.

Remember to use the `check experimental` review comment on a Gerrit change to trigger jobs in the experimental pipeline, which provide increased test coverage.

## Synchronise with Kolla Ansible feature flags

Clone the Kolla Ansible repository, and run the Kayobe `tools/kolla-feature-flags.sh` script:

```
tools/kolla-feature-flags.sh <path to kolla-ansible source>
```

Copy the output of the script, and replace the `kolla_feature_flags` list in `ansible/roles/kolla-ansible/vars/main.yml`.

The `kolla.yml` configuration file should be updated to match:

```
tools/feature-flags.py
```

Copy the output of the script, and replace the list of `kolla_enable_*` flags in `etc/kayobe/kolla.yml`.

## Synchronise with Kolla Ansible inventory

Clone the Kolla Ansible repository, and copy across any relevant changes. The Kayobe inventory is based on the `ansible/inventory/multinode` inventory, but split into 3 parts - top-level, components and services.

### Top level

The top level inventory template is `ansible/roles/kolla-ansible/templates/overcloud-top-level.j2`. It is heavily templated, and does not typically need to be changed. Look out for changes in the `multinode` inventory before the `[baremetal]` group.

### Components

The components inventory template is `ansible/roles/kolla-ansible/templates/overcloud-components.j2`.

This includes groups in the `multinode` inventory from the `[baremetal]` group down to the following text:

```
# Additional control implemented here. These groups allow you to control which
# services run on which hosts at a per-service level.
```

### Services

The services inventory template is `ansible/roles/kolla-ansible/templates/overcloud-services.j2`.

This includes groups in the `multinode` inventory from the following text to the end of the file:

```
# Additional control implemented here. These groups allow you to control which
# services run on which hosts at a per-service level.
```

There are some small changes in this section which should be maintained.

## Update dependencies to upcoming release

Prior to the release, we update the dependencies and upper constraints on the master branch to use the upcoming release. This is now quite easy to do, following the introduction of the `openstack_release` variable. This is done prior to creating a release candidate. For example, see <https://review.opendev.org/c/openstack/kayobe/+867617>.

## Synchronise kayobe-config

Ensure that configuration defaults in `kayobe-config` are in sync with those under `etc/kayobe` in `kayobe`. This can be done via:

```
rsync -a --delete kayobe/etc/kayobe/ kayobe-config/etc/kayobe
```

Commit the changes and submit for review.

### Synchronise kayobe-config-dev

Ensure that configuration defaults in `kayobe-config-dev` are in sync with those in `kayobe-config`. This requires a little more care, since some configuration options have been changed from the defaults. Choose a method to suit you and be careful not to lose any configuration.

Commit the changes and submit for review.

### Prepare release notes

It's possible to add a prelude to the release notes for a particular release using a `prelude` section in a `reno` note.

Ensure that release notes added during the release cycle are tidy and consistent. The following command is useful to list release notes added this cycle:

```
git diff --name-only origin/stable/<previous release> -- releasenotes/
```

## RC1

Prior to cutting a stable branch, the `master` branch should be tagged as a release candidate. This allows the `reno` tool to determine where to stop searching for release notes for the next release. The tag should take the following form: `<release tag>.0rc$n`, where `$n` is the release candidate number.

This should be done for each deliverable using the `releases` tooling. A release candidate and stable branch definitions should be added for each Kayobe deliverable (`kayobe`, `kayobe-config`, `kayobe-config-dev`). These are defined in `deliverables/<release name>/kayobe.yaml`. Currently the same version is used for each deliverable.

The changes should be proposed to the releases repository. For example: <https://review.opendev.org/#/c/700174>.

### After RC1

The OpenStack proposal bot will propose changes to the new branch and the master branch. These need to be approved.

After the stable branch has been cut, the master branch can be unfrozen and development on features for the next release can begin. At this point it will still be using dependencies and upper constraints from the release branch, so revert the patch created in *Update dependencies to upcoming release*. For example, see <https://review.opendev.org/701747>.

Finally, set the previous release used in upgrade jobs to the new release. For example, see <https://review.opendev.org/709145>.

## RC2+

Further release candidates may be created on the stable branch as necessary in a similar manner to RC1.

## Final Releases

A release candidate may be promoted to a final release if it has no critical bugs against it.

Tags should be created for each deliverable (kayobe, kayobe-config, kayobe-config-dev). Currently the same version is used for each.

The changes should be proposed to the releases repository. For example: <https://review.opendev.org/701724>.

## Post-release activities

An email will be sent to the release-announce mailing list about the new release.

## Continuing Development

Search for TODOs in the codebases describing tasks to be performed during the next release cycle.

Dates for each milestone in the new cycle can be found in [Kolla projects documentation](#). The first action that needs to be taken is to [switch Kayobe back to using the master version of its dependencies \(R-23\)](#).

## Stable Releases

Stable branch releases should be made periodically for each supported stable branch, no less than once every 45 days.